SCIENTIFIC AMERICAN

[Entered at the Post Office of New York, N. Y., as Second Class Matter. Copyright, 1908, by Munn & Co.]

Vol. XCVIII.—No. 23. ESTABLISHED 1845.] NEW YORK. JUNE 6, 1908. [10 CENTS A COPY $3.00 A YEAR.

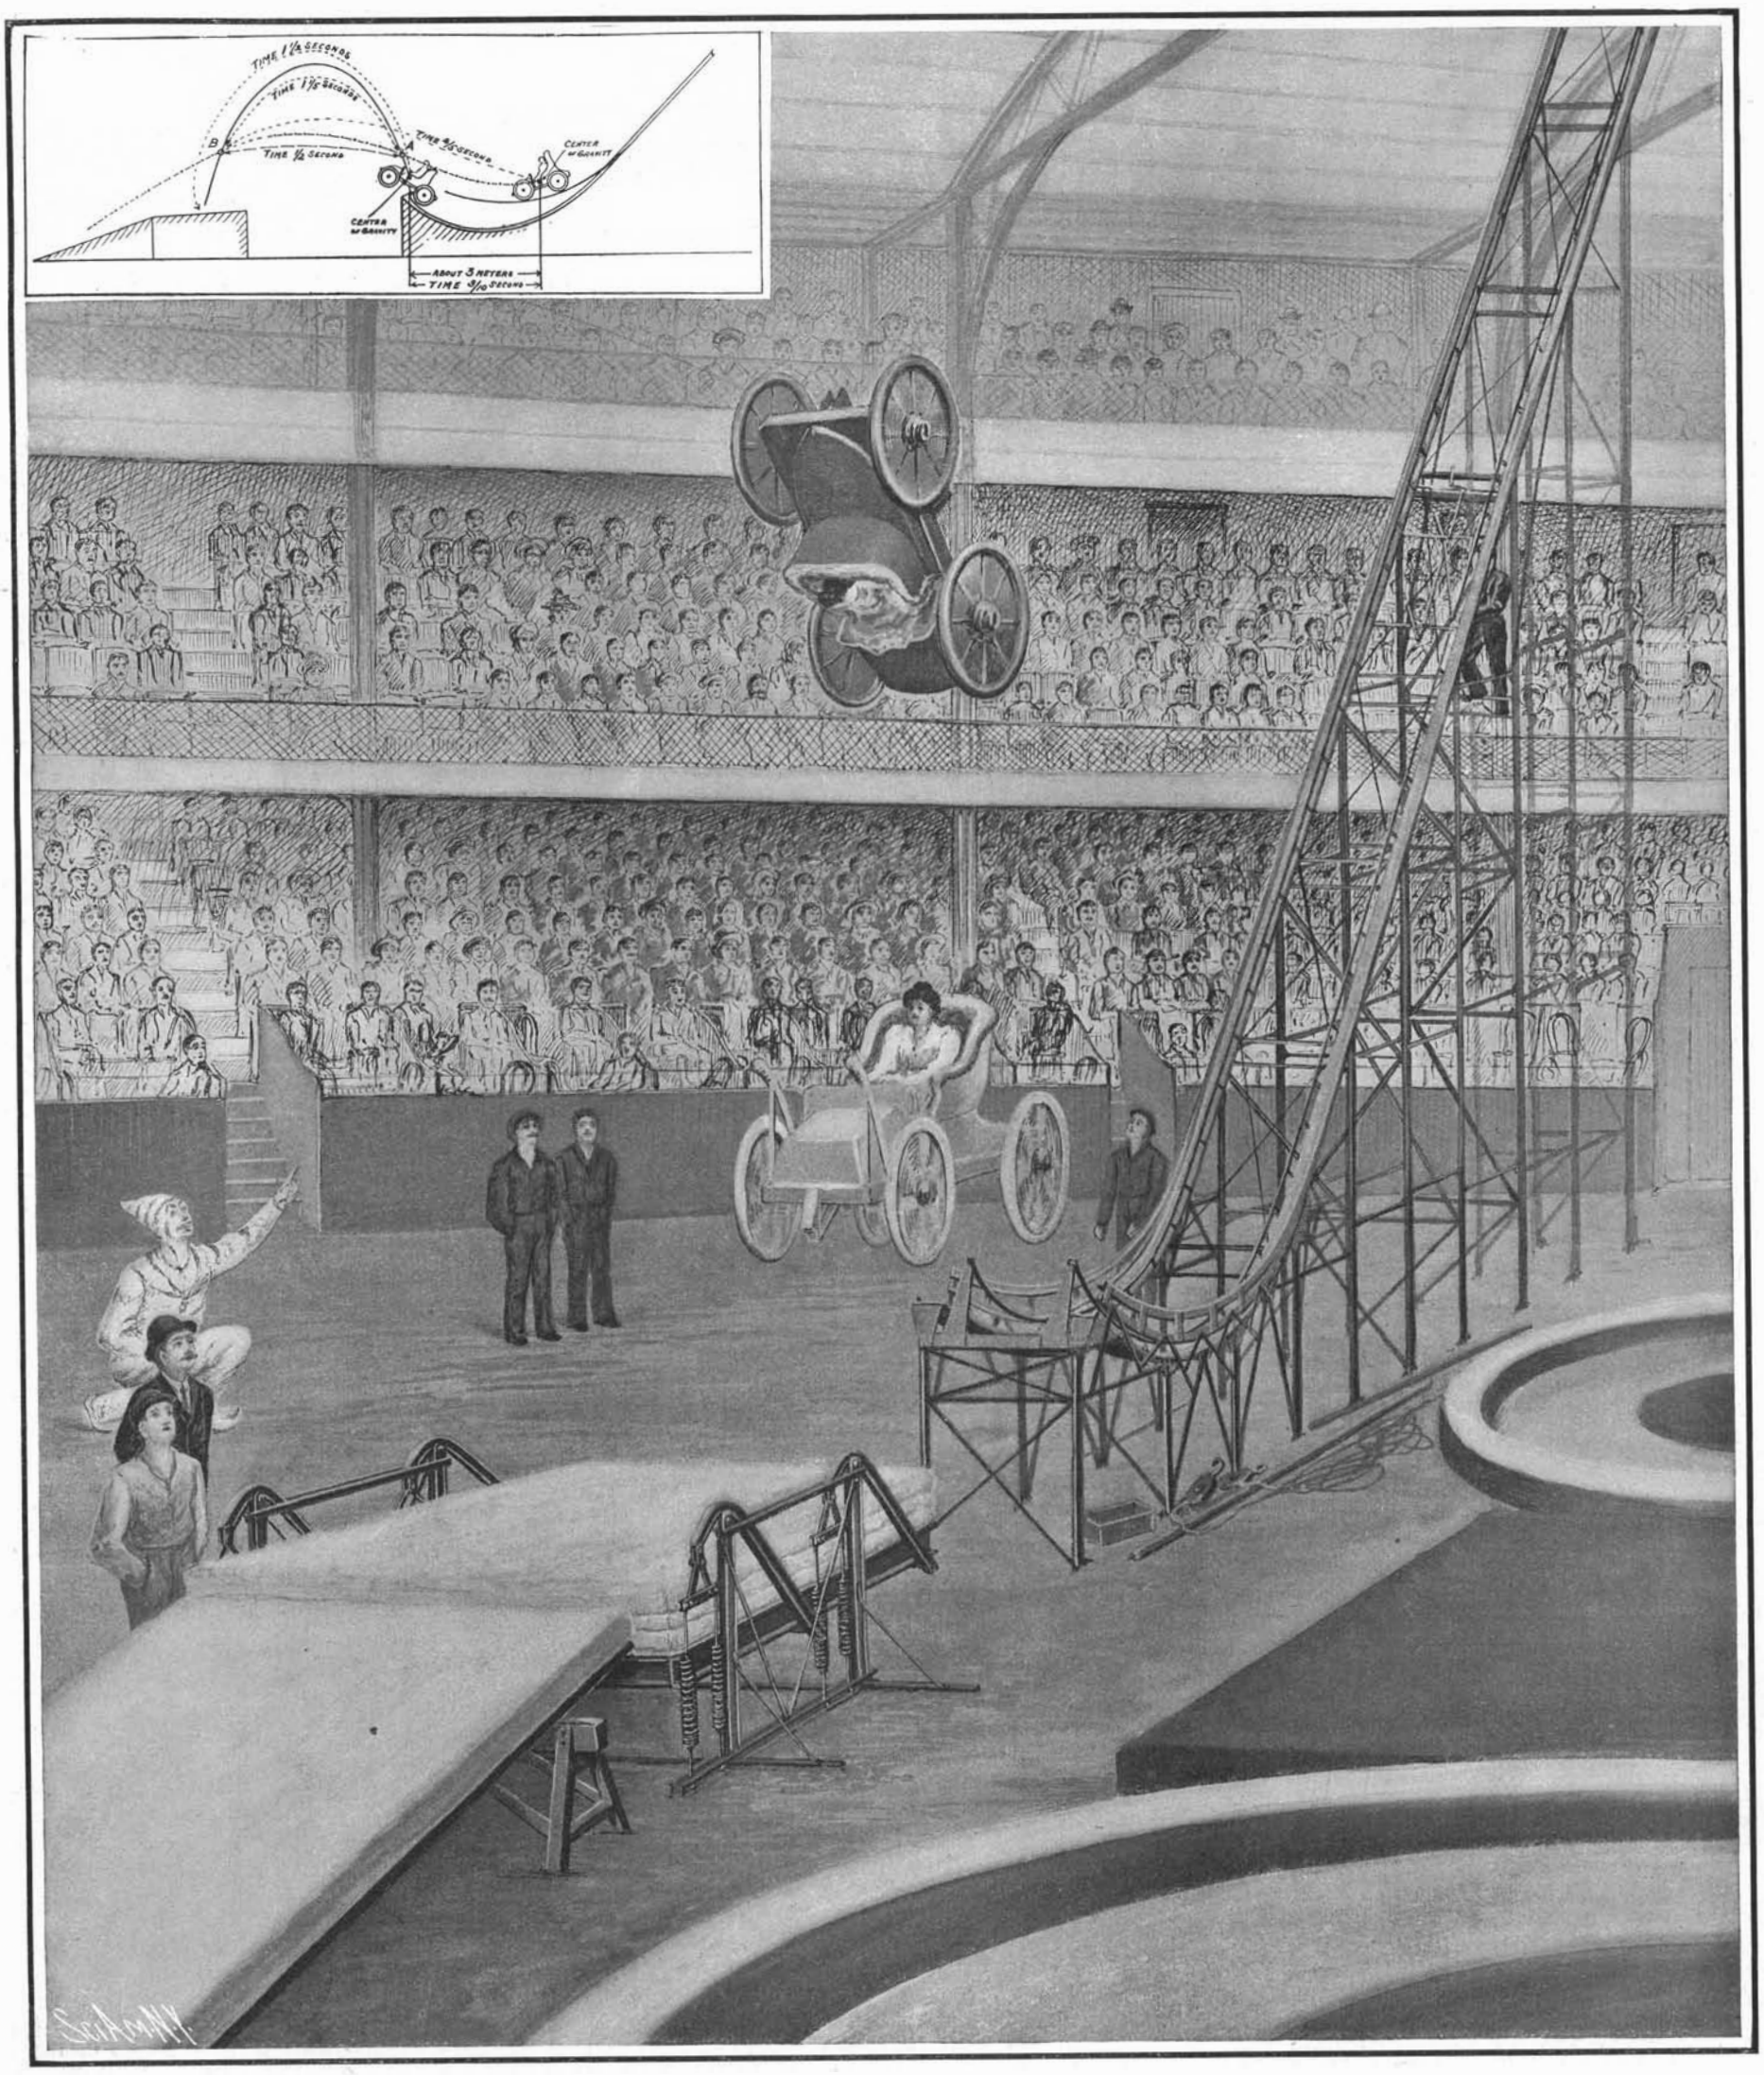

The Inclined Railway is so Constructed That While One Automobile Shoots Parabolically into the Air, Lands on a Platform, and Then Rolls to the Ground, Another Describes a Complete Somersault. The Safety of the Performance Depends on the Exact Timing of the Two Cars.

"AUTOS THAT PASS IN THE AIR."—[See page 411.]

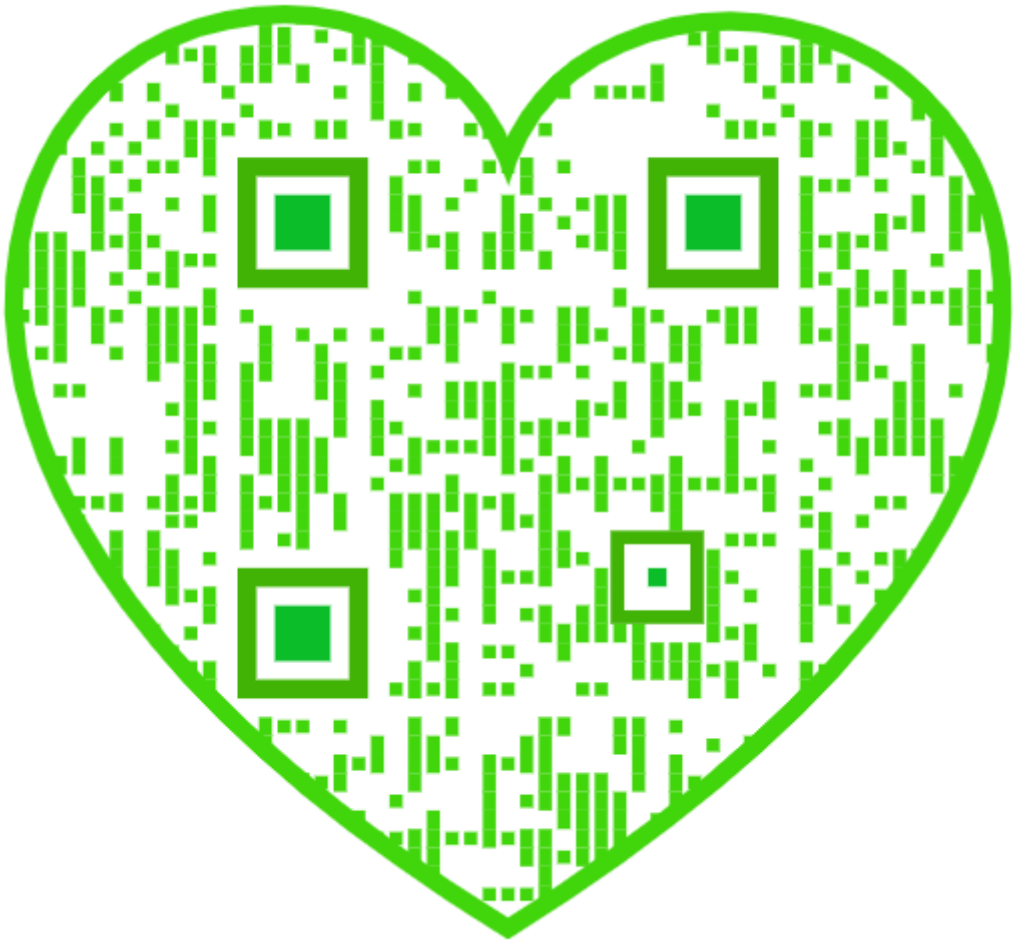

SCIENTIFIC AMERICAN

ESTABLISHED 1845

MUNN & CO. - - Editors and Proprietors

Published Weekly at

No. 361 Broadway, New York

CHARLES ALLEN MUNN, *President*
361 Broadway, New York

FREDERICK CONVERSE BEACH, *Sec'y and Treas.*
361 Broadway, New York

TERMS TO SUBSCRIBERS.

One copy, one year, for the United States or Mexico $3.00
One copy, one year, for Canada 3.75
One copy, one year, to any foreign country, postage prepaid, 18s. 6d. 4.50

THE SCIENTIFIC AMERICAN PUBLICATIONS.

Scientific American (established 1845) ..... $3.00 a year
Scientific American Supplement (established 1876)..... 5.00 "
American Homes and Gardens ..... 3.00 "
Scientific American Export Edition (established 1878). ..... 3.00 "

The combined subscription rates and rates to foreign countries, including Canada, will be furnished upon application.

Remit by postal or express money order, or by bank draft or check.
MUNN & CO., 361 Broadway, New York.

NEW YORK, SATURDAY, JUNE 6, 1908.

The Editor is always glad to receive for examination illustrated articles on subjects of timely interest. If the photographs are *sharp*, the articles *short*, and the facts *authentic*, the contributions will receive special attention. Accepted articles will be paid for at regular space rates.

BATTLE TEST OF A 12-INCH TURRET.

A battle which was not a battle but an expert test of war materials, took place on May 27 in the waters of Hampton Roads, between two modern monitors (if there can be such a thing as a modern monitor) the "Arkansas" and "Florida," when a 12-inch shell was fired at a distance of a few hundred yards from a 40-caliber gun of the "Arkansas" against the inclined turret port plate of the sister ship "Florida." The shell did not get through, neither did it cause any serious structural injury to the turret, its turning gear, or its interior.

The "Arkansas" and "Florida" belong to a class of four monitors which were authorized, in a moment of panic, by Congress during the Spanish war. The SCIENTIFIC AMERICAN protested strongly against the construction of these out-of-date craft, and predicted that it would not be many years before they would be regarded as practically useless. The prediction has come true. These four ships are to-day too low, too slow, and altogether too unsteady as gun platforms, to be reckoned as any serious part of the navy.

Hence the recent decision of the government to use the "Arkansas" as a target for modern gun fire, to determine how far the results obtained at the proving grounds could be duplicated on the sea, and incidentally to learn a great many other important things about the behavior of a ship under fire, was highly commendable. The practice of using obsolete warships as targets is not new. Some seven or eight years ago the British navy moored the old battleship "Belle Isle" in shoal water and hammered her until she sank; and recently the same thing was done with the British battleship "Hero." The French, moreover, are patching up the big battleship "Jena" with a view to putting her to similar hard usage.

A shell from one of the 12-inch guns of the "Arkansas," filled with high explosive, was fired at a range of about 350 yards, and with a charge so reduced that the striking velocity would be about the same as that at a range of 5,000 yards with a full charge of powder. It struck the inclined turret port plate, just to the right of the starboard gun, and the energy of the blow seems to have been entirely absorbed by the outside plate which was cracked but was not penetrated. Dummy men which had been placed inside were found to be in their original positions. The port gun was intact, the ammunition hoist and the various mechanisms were found in good condition. This result is particularly gratifying when we remember that this armor is not the Krupp steel now used on our ships, but the old Harvey armor of twenty to twenty-five per cent less resisting power. It is probable that Krupp steel would have defeated the shell entirely. Immediately after the blow was struck, it was found that the turret turning gear was in perfect condition. Altogether, the test is considered to have established the correctness of the design of this, the most important military element in a battleship.

At the after end of the superstructure there had been erected a tower, or skeleton mast, at the top of which was a fire-control platform. The mast consisted of a large number of hollow steel tubes, tapering from 2½ inches in diameter at the bottom to 1¾ inches at the top, which were laced or trussed spirally into a tower 150 feet in height and tapering from 25 feet at the base to 10 feet at the top. Against this was directed a fire of four 4-inch shots and one 12-inch. Although every shot got home, the tower, in spite of its being badly cut up, was still carrying its fire-control platform intact. After the attack a naval constructor climbed to the top of the tower and found that the speaking-tube leading down to the deck was workable, and this in spite of the fact that it had been somewhat damaged. The electrical wiring was also found to be in good order. As the result of this test the Board have agreed that the skeleton type of mast is greatly superior to the tubular type. It is gratifying to know that masts of this kind are provided for in our four 20,000-ton ships of the "Delaware" class. The next experiment carried out against the "Arkansas" will consist in firing torpedoes at her, first while she is protected by torpedo nets, and secondly, when she has no protection of this character. The test should throw some much-needed light upon the question of watertight compartments and anti-torpedo bulkheads.

THE CAPACITY OF THE SUBWAY.

The results of the exhaustive examination of traffic conditions in the Rapid Transit Subway made by B. J. Arnold have been embodied in a report to the Public Service Commission, which contains many valuable suggestions for increasing the traffic capacity.

It is believed that the present rate of train movement of thirty trains per hour in one direction upon each track can be increased to forty trains per hour, by installing automatic closing-door signals upon the cars; by providing speed control signals auxiliary to the present block signal system at the approaches to the stations; and by providing more doors in the sides of the cars. To make these changes effective the obstacle presented by the present cross-overs in the tracks at Ninety-sixth Street station should be removed, and the station should be double-decked so as to provide two additional express tracks in the station.

The train capacity of the Subway cannot be increased by increasing the speed of the trains, as the increased length of the signal blocks necessary for the higher speeds more than offsets the advantage of the increased speed. But a great increase in the capacity can be realized by lengthening the trains. Mr. Arnold suggests the running of seven-car local trains and ten-car expresses, both at the rate of 40 miles an hour. He estimates that if this be done, the capacity of the present Subway will be increased 75 per cent.

Although double-deck cars are considered to be impracticable for subway operation, the question of using wider cars should be carefully considered in planning future subways; and in order to secure the maximum possible capacity, tests should be made to determine more accurately the distance required to bring a train to rest from full speed when the emergency stop is used.

Finally, the report suggests that to secure maximum capacity, future subways should be designed with double-decked stations, provided with double tracks for each main line; this would permit of the operation of ten-car trains on a 60-second headway on each track, thus providing a carrying capacity of three times that of the present subway.

RECTANGULAR LATTICED COMPRESSION MEMBERS IN BRIDGES.

If engineers had as certain knowledge of the strength of the built-up compression members of modern bridges as they have of that of the tension members, the fall of a Quebec bridge would be well-nigh impossible, and the last cause of anxiety about such structures would be removed. When the total load to be taken by a tension member is known, it is a simple matter to put into the eye-bars a sufficient section of steel to insure that the stress upon each square inch of the member cannot possibly exceed a certain figure, far below the known strength of that steel. Hence it is that properly designed modern steel bridges are never known to fail in the tension members. It is the compression members that are the first to go.

The uncertainty as to the actual strength of such huge built-up members as are found in bridges of the size of that at Quebec and Blackwell's Island arises from the lack of sufficient knowledge as to the resisting strength of the steel when, unlike the simple eye-bar, it consists of a complicated assemblage of plates, angles, splices, and stiffeners, depending for its strength upon an accuracy of workmanship which, in members of this huge size, it is almost impossible to obtain.

Thus the Blackwell's Island Bridge chords are made up of four vertical webs or built-up plates, four feet deep and, say, five or six inches in thickness. Now a solid plate, four feet deep, five inches thick, and forty feet long, if stood on end would carry a certain load, before it began to bend transversely to its plane. But if that web consisted of, say, seven or eight thin plates riveted together, it is evident that it would begin to bend under a much smaller load than the solid plate. How much smaller? No one can exactly say; and here is one of the elements of uncertainty affecting the design of large compression members.

Now let us suppose that instead of one built-up web we take four, and stand them up side by side in parallel planes, with intervals of eighteen inches between them. The total load they would carry without bending or buckling would be probably just four times as great as was carried by the one. The total, however, would be ridiculously small compared with the total section of 1,119 square inches of steel, which is the amount in the largest chord section of the Blackwell's Island Bridge.

If, however, these four webs were to be connected together throughout their whole height, so that instead of acting independently under the load, they would be held together, and must deflect, if they did so at all, as a whole and in the same direction, it is evident that they would carry a much greater load than when they stood up as four, unbraced, thin, and long plates, with nothing but their own very slight individual stiffness to hold them in their true vertical planes. Moreover, the amount of additional load the four webs, as thus braced together, would carry without buckling, would evidently depend upon the strength of this bracing, or stiffening.

The simplest and at the same time the weakest form of stiffening would be to rivet a series of flat plates across the four edges of the webs, at stated intervals, as was done between the edges of the two inner webs of the Blackwell's Island Bridge.

A better way would be to rivet a complete trusswork of light steel angles, or bars, across the edges of the four webs, as was done across the whole width of the Quebec chords, and across each outside pair of webs in the Blackwell's Island Bridge. (Although it should be remembered that the latter trussing, because of its slight depth, is, for a given weight of latticing, greatly inferior to latticing which extends the full width of the chord.) The webs, as thus stiffened, could be loaded, either until the lattice bars broke, or the lattice rivets sheared off, or the webs buckled between the points of attachment of the lattice trussing to them. However, the latticing would fail and the webs buckle at a load per square inch far below the maximum crushing strength of the steel in the webs.

If, however, steel cover plates, wide enough to cover the width of the four webs, were to be riveted down their full length, the rivets being driven but a few inches apart, and so tying the edge of each web securely to the cover plates, the four webs would be so securely held in their true planes, that the loading might be carried up far nearer to the maximum strength per square inch of a short length of steel of the same quality. It it were desired to develop the strength of the webs still further, internal transverse plates or webs might be riveted between them at their center.

The whole question of the strength of exceedingly large compression members of the rectangular three- or four-leaved type is in a most unsatisfactory state. Formulæ which seem to have been trustworthy for small compression members have failed for such large ones as those at Quebec. The cause for uneasiness about the Blackwell's Island Bridge lies in the fact that a new system of stiffening has been adopted which, theoretically, at least, is inferior to that used at Quebec. The combination of two shallow latticings, joined by a set of flat tie-plates, is essentially hybrid, and its strength is difficult to determine. A bottom chord carrying the enormous loads of those at Blackwell's Island should have been stiffened by the third or cover-plate system of the three above referred to, and not by a combination of the first two.

There is only one certain way to determine whether these chords are able to take care of the enormous loads which will come upon them, and that is to build a model of, say, one-third full size, and test it to destruction in a testing machine. We care not how expert may be the Board that investigates the bridge—its findings with regard to these chords of novel and untested type will be based largely upon the theories which received such a staggering blow when the Quebec bridge fell.

As we go to press we are gratified to learn that Comptroller Metz has appointed a well-known firm of engineers, not in any way connected with the Bridge Department, to make a thorough computation of the strength of the bridge. An independent examination is also being made by Prof. Burr; and the Bridge Department will thus have the advantage of a double check upon the work. In any case we trust that a model will be made and tested. The cost would be but a few thousand dollars, a consideration that should have no weight in a bridge costing some twenty-three million dollars.

Military experts are satisfied that the balloon offers an excellent means of locating the positions of the enemy and that the danger to the men in the balloon is not so great as had been heretofore supposed. By the aid of photographic apparatus and field glasses the enemy may be located at distances ranging from five to fifteen miles, according to the condition of the atmosphere.

PERMANENT PRINTED RECORDS ON LINEN.

BY DR. WILLIAM J. MANNING, OF THE GOVERNMENT PRINTING OFFICE.

Perhaps nothing can be more interesting in a way, to the general historian, scientific and literary man than the certain knowledge of the fact that his writings and printed records on all subjects, inclusive of even photographic reproductions in the form of "half-tones," may be handed down to those who will come after us thousands of years hence. In the course of a study of various materials suitable for the permanent preservation of valuable literary works, I investigated, among other fabrics, the linen wrappings used by the ancient Egyptians to incase the bodies of their dead. A specimen of such linen was obtained from the Metropolitan Museum of Arts, New York city, by the writer, and the age of the fabric is certified by the curator of Egyptian antiquities of the Museum. Of interest possibly to the historian and Bible reader as well as those who reverence and love the work of the ancients, is the fact that the wrappings in question were taken from the body of King Merenptah, whom the Bible mentions as being the Pharaoh who ordered the exodus of the Jews from Egypt. The age belongs to the Nineteenth Dynasty, which would approximate the age of 3,400 years, a tremendous space of time when one stops to consider the matter.

The writer, while obtaining the fabrics and looking over the various specimens submitted to him, was very fortunate to obtain by mere accident a piece containing pitch or bitumen spots, with which latter agent the Egyptians affixed the body to the inner coffin and which procedure is described by Pliny and Herodotus. The spots appealed rather strongly to the writer from the fact that they would seem to constitute conclusive proof of the lasting and non-fading properties of printing ink as manufactured and used to-day the world over.

The basis of all black printing ink is lampblack or carbon (soot) to which is added and blended boiled linseed oil, to serve as a vehicle, the oil being thoroughly mixed with the lampblack, or "milled," as it is known technically to the printing ink industry. Varnish, glycerine, and a volatile dryer are sometimes added to meet the various requirements of the printing trade, but the basis is, or should be, always carbon (lampblack) and boiled linseed oil for black printing ink. The lampblack is obtained from a resinous material similar to the bitumen of the ancients that left the spots or impression on the linen.

The manner of receiving the ink impression as obtained on paper or even linen fabric is made up of both a mechanical and a chemical union. By a chemical union I mean the fact that the linseed oil carries a certain proportion of the carbon or lampblack into the agent printed upon, thus staining the parenchyma of the cellulose cell. By a mechanical union, I mean the excess ink that may lodge on the surface of the agent printed upon by virtue of its adhesiveness.

In the Egyptian mummy wrappings to which I have already referred the bitumen stain or chemic union has remained unto this day, as would the stain or impression of printing ink had it been so received, beyond all doubt. As a further proof of this statement and the unchanging color of carbon (lampblack) note should be taken of the color of coal, almost pure carbon, which for ages has retained its color.

Lehner has called attention to the lasting properties of linen fabrics as used by the ancients, and urges a better quality of printing paper containing a larger proportion of linen fiber. The objection to paper, whether it is composed of cotton, linen, or wood fibers, as concerns printed records for a long period of time might be thus summarized:

The fact that all paper is composed of very short fibers held together by a glue or size and the initial pressure given by the heated cylinders on the paper-making machine may be urged. Certain kinds of blotting paper may be mentioned as an unsized or glueless paper, the fibers being held together by pressure only. The best grade of book paper may be cited as an engine-sized or glued paper. Long periods of time or exposure to dampness may disintegrate the size or glue that holds or binds the fibers together. If you are sufficiently interested, wet a piece of paper and note how easily the printed sheet drops to pieces.

The bleaching process to which the paper stock is subjected would seem to form a very important feature in connection with the lasting properties of paper also. Chlorine and bleaching powders are used extensively for this purpose, and the difficulty seems to be that when the elements are removed which go to make up the various colorings, both natural and artificial, of the paper stock before being bleached, the chlorine probably combines chemically in the form of a chloride or a hypochlorous oxide indirectly, from the fact that the chlorine will unite with nearly all elements directly save oxygen and a few others. Very likely for this reason it later exists as a weak acid in the paper stock, probably as hypochlorous, when the finished paper is acted upon by the moisture of the atmosphere. It is known that hypochlorous oxide will unite with water to form hypochlorous acid. It is therefore a difficult matter to neutralize the bleached paper stock because of this chemical combination.

The effect of the process just described is noticed when the average book printing paper is exposed to the air, even under cover, for any length of time. Note, if you are interested, the light yellow tinge that makes its appearance, followed in due course of time by a dark yellowish green hue. This condition is followed later by an increasing brittleness to such an extent that one hesitates, in some instances, to turn a leaf down for fear of cracking the sheet. The yellow tinge is not noted so early in papers whose surfaces are sized, because the film of the size very likely protects the hypochlorous oxide from the air. Sooner or later it makes its appearance as a slight discoloration. This chemical action, as the result of bleaching, must necessarily go on until the sheet is disintegrated. Although we have no positive proof of this latter statement, yet it is known that the slow continuous chemic action, once in motion, must continue as long as there is material left upon which to perform its work.

The first paper makers used the sun to bleach their paper stock, and while they were never enabled by this method to obtain the extreme whiteness obtained by the use of chlorine by modern paper makers, yet their product does not show the chemic action just described and the bleaching appears to have been accomplished in a perfectly natural and harmless manner.

In linen fabric of a very fine mesh and texture and of an unbleached variety, the objections raised against the paper, it would appear, are easily overcome. The fact that one can be always sure of the absolute purity of the linen so used as compared with the uncertainty of even linen paper and its composition, is very important. The printing impression so received upon the fabric is beautifully clean cut, and stands out as distinctly as, if not more so than on paper. Even halftone cuts can be printed on linen.

There is also the added fact that the fibers of linen are very long, and as such are twisted into threads and these threads woven in such a manner that each succeeding thread locks the other in place in a mechanical manner, as in the ancient Egyptian wrappings which have defied time itself, even when exposed to the elements and the careless usages of ages.

The further fact that the linen may be used in its unbleached state unacted upon by chemicals used for bleaching purposes, and the very important feature that the printing ink impression cannot be removed from the fabric, which is possible with comparative ease even when parchment is used as the substance printed upon, are two excellent reasons why linen should be used for documents which are intended to be permanent.

It has been proposed, and the matter is now before the Joint Committee on Printing of Congress for action, to print upon linen sheets precisely the same as a sheet of paper, at the expiration of the regular paper edition, two copies of the more important government publications. It is further proposed to encase each volume so printed in a bath of paraffin wax and thus to seal the volume hermetically from extraneous or atmospheric influences.

Taking the year of 1907 as a basis it will cost, approximately, to print two linen copies of the revised edition of the Congressional Record, constituting some 5,000 pages, not over $65 for the fabric so utilized. No change in existing printing machinery is necessary and it is but the work of a few moments to produce the printed linen sheets.

AERONAUTICAL NOTES.

Subsequently to the successful 1,017-foot flight of the Aerial Experiment Association's aeroplane, described in our last issue, the aeroplane was demolished when a flight was attempted by Mr. J. A. D. McCurdy, of the association. The machine is being rebuilt, and further tests will soon be made. The builders will duplicate this machine for anyone desiring one for $5,000, delivery to be made within sixty days.

On March 30 last the Wright brothers were granted two French patents on improvements in the control of their type of aeroplane. These provide for the maintenance of lateral stability by the slight twisting of the outer ends of the surfaces, and for the correction of the twisting effect thus produced, which tends to turn the machine around its vertical axis, owing to the greater resistance at the end of the wings where the greater angle of incidence occurs. This turning effect is counteracted by the use of a vertical rudder and a stationary vertical plane in front, and also by the use of small vertical rudders between the planes at their ends. The latter are used to increase the resistance of the end having the least angle of incidence, while the vertical rudder is operated in conjunction with the rear vertical rudder, to correct the twisting motion and also to steer the aeroplane. The patent does not cover the application of a motor to the aeroplane, the machine shown being, like their former machine, apparently only a glider.

After the experiments of Farman and Delagrange above the parade ground at Issy, on May 2, during the course of which the latter's aeroplane failed to make a turn, made a sudden descent, and finally landed upon a taximeter cab, these two aviators decided to abandon their experiments in France on account of the interference of spectators, who crowded upon the parade ground in dangerous numbers, and also because this field had become too small, owing to the increased speed attained by Farman by the use of a motor of somewhat greater horse-power. The two aviators, who, as is well known, have similar machines, betook themselves to Ghent and to Rome respectively, and on May 25 Farman is reported to have begun his experiments and to have made a number of flights in a rather strong wind. On May 27 he is said to have made two flights of 1,600 meters (5,249 feet) each. On the latter day, Delagrange remained in the air nine minutes and twelve seconds, while trying to win the $8,000 prize recently offered in Italy for a fifteen-minute continuous flight. The latter performance was made in the presence of King Victor Emanuel.

The fourth congress of the International Federation of Aero Clubs assembled in London on May 27. There were representatives from the following countries: America, Austria, Belgium, England, France, Germany, Hungary, Italy, Spain, Sweden, and Switzerland. Among the questions discussed was that concerning the ending of a balloon race at the seaboard of a country, and it was decided that any balloonist who goes to sea so far that he requires assistance to get ashore will be disqualified as a pilot, and, if he does this in a race, the distance he covered above the land will not count. In view of the airship disaster in California on May 23, in which a gigantic dirigible, carrying sixteen men, exploded, it was thought best to take steps to control ballooning as much as possible and thereby add to the safety of inexperienced aeronauts.

Russia is the latest country to take up aeronautics, and there is a great popular interest in the subject shown among the people and by the government. The War Department has donated a $2,500 cash prize for an aeroplane race, the conditions of which are that, in case of war, the aeroplane owned by members of the club shall be placed at the disposal of the War Department. The distance to be covered in this race is given as 158 miles at an average speed of not less than 9 miles an hour. The new club has joined the International Federation.

That the plain balloon is not as safe as most enthusiastic balloonists assert, is shown by two serious accidents which occurred last month. On May 19, while participating in an international race, a Spanish balloon containing two men descended. The experienced pilot in charge was thrown out and the balloon reascended with the other man who had no knowledge of ballooning. After being in the air all night, the balloon came down the following day, and the man who was in the basket was seriously injured by colliding with various obstacles before the balloon reached the ground. The other accident resulted in the death of Lieut. Fonseca, a balloon expert of the Brazilian army. The lieutenant had just arrived from France with a new balloon and was making his first ascension before the Minister of War and a large number of officers and pupils of the military school. He was in the basket and was completing his final preparations, when a sudden gust of wind snatched the balloon away from the men who were holding it and it shot up in the air for a distance of 3,000 feet. It then collapsed and fell to the ground with great rapidity. This accident recalls a similar one which occurred in Italy about a year ago, when a captive military balloon was struck by lightning and exploded in mid-air and the officer in the basket lost his life as a result of the fall.

THE CURRENT SUPPLEMENT.

The current SUPPLEMENT, No. 1692, contains among other interesting articles a striking contribution by Herbert C. Ponting on photographing alligators, excellently illustrated. Mr. George N. Heath's paper on the fixation of atmospheric nitrogen in America is concluded. Carl G. Crawford writes on the treatment of timber and explains the tank method. In these days of prohibition agitation, Dr. A. R. Cushing's impartial review of the medical value of alcohol will prove instructive. In an article on Saturn and his rings the well-known French astronomer Abbé Moreux describes in a popular way the various aspects of this very curious celestial phenomenon. Prof. S. J. Holmes contributes an excellent article on the instinct of feigning death. Prof. Herbert Maule Richards gives a very lucid explanation of the mutation theory of Hugo de Vries. Otto Nairz describes clearly the Poulsen wireless telephone. Edward A. Martin discusses dewponds from the geological standpoint. The usual notes will be found in their accustomed places.

THE AWARD OF THE SCIENTIFIC AMERICAN MEDAL.

One of the most encouraging signs of the moral uplifting of the race is the unmistakable growth in these days of humanitarian sentiment. The dignity of the human body, the sanctity of human life, are swiftly emerging to their full and proper recognition. The report has lain too long at our doors that as a people we were so madly bent on the pursuit of wealth that we cared little who might fall by the wayside, if only the goal were swiftly achieved. To the question: "How much then is the life of a man worth more than a sheep?" we have made answer by rolling up a record which well exceeds the half million mark of annual maimings and killings that may well put us to the blush. In view of the fact that a very large percentage of accidents is absolutely preventable, the editors of the SCIENTIFIC AMERICAN decided last year to offer a gold medal annually for the best device for the protection of life and limb, exhibited at the expositions held under the auspices of the American Museum of Safety Devices, after a board of impartial experts had rigidly passed on the devices submitted, and our engraving shows the obverse of the medal, which is suitably inscribed on the reverse. It is 2⅜ inches in diameter and weighs 5½ ounces. For the past few weeks a most interesting exhibition has been held at the American Museum of Safety Devices, 231 West 39th Street, New York, N. Y. A large number of exhibits were on view and the jury was enabled to make a careful and unbiased examination. The result of their labors was made public at a luncheon given at the Engineers' Club on May 25, which was attended by about one hundred prominent industrialists and heads of great corporations. Mr. Charles Kirchoff, editor of the Iron Age, presided, and there were addresses by Mr. T. Commerford Martin, editor of the Electrical World, and by Dr. W. H. Tolman, director of the museum. A most interesting letter from the Rt. Rev. Henry C. Potter, D.D., bishop of the diocese of New York, who has accepted the chairmanship of the educational committee, was also read. The jury for the award of the SCIENTIFIC AMERICAN medal was a most distinguished one, consisting of Prof. F. R. Hutton, chairman; Mr. H. H. Westinghouse, Mr. Stuyvesant Fish, Mr. George Gilmour, Mr. John Hayes Hammond, Prof. Samuel Sheldon, and Mr. Cornelius Vanderbilt. The findings of such an expert jury will certainly carry great weight.

The award of the gold medal for 1908 was made in the field of transportation. It was eminently proper that the first medal should be given for a device for safeguarding life at sea. What is more terrible than a fire at sea? The dreadful crash of collision is no worse than the sullen, angry roar of flames coming from a hatchway. To prevent fire by proper ventilation, to detect fire by purely mechanical means, and to put out fire in inaccessible places with the aid of live steam is the object of the successful device which has really been "tried by fire" in a number of instances.

Within the limitations of the rules adopted the jury decided that any devices, to claim consideration, must possess the following elements or attributes, and that that device which exhibited these qualities to the higest degree should receive the award.

1. Applicability, wide or narrow. Does the device procure safety for a large number of persons, or in a great variety of conditions?

2. Practicability. It must be capable of being used successfully. It must not be too cumbrous or intricate to apply or to operate.

3. Simplicity. It must not be so complicated that experts are required to handle it or to keep it in repair and operation.

4. Reliability. It must not be liable to derangement, causing failure to work in emergencies.

5. Durability. It must not be so delicate, or require such fine adjustment that when installed it will not last in service.

6. Commercial availability. It must not be too expensive in first cost to install, or in operation to maintain.

In applying their rules and requirements to the exhibits shown in the exposition of 1908, the jury awarded the medal tendered by the SCIENTIFIC AMERICAN to the Rich Marine Fire Indicating and Extinguishing System. The jury was glad to make honorable mention of the Welin Quadrant Davit, and the Simmen Automatic Railway Signal. A brief description of the successful device will prove of interest. A 1-inch pipe runs to each hold, storeroom, bunker, or other inaccessible or dangerous place, where it terminates with a flat cap or smoke collector. There may be several of these collectors attached to each pipe. The pipes from the various holds and bunkers are assembled from fore and aft and are carried to the bridge or to the wheel house. Here they are arranged in banks in a case, which is practically air-tight. Each pipe has a removable smoke spreader bearing a number. Directly over the pipes is an electric fan which can be actuated continuously or at intervals. In front is a clock provided with means for making contact with an electric bell every fifteen minutes. It is the duty of the officer of the watch to set the motor in motion if it is not running continuously and to look through the glass front at the pipes. Very little suction is necessary to draw the smoke from any incipient fire and it is readily detected with the aid of the electric light which is inside the case. If no fire is found the officer "rings in" on a time clock like a watchman's detector, showing that he has made the proper inspection. It is customary when an officer comes on duty to make the same test and to enter it on the ship's log. If there should be any indication of smoke, the case is opened, the cap is removed, and a flexible hose is screwed to the end of the pipe and notice is given the engine room to turn on live steam, which is one of the best known destroyers of combustion. There are two lengths of hose provided, so that if necessary fire can be fought in two compartments at the same time. Several ships have been saved by the aid of this simple adaptation of what is known as the "plumber's smoke test." The device has been indorsed by Lloyds and other marine underwriters, and ships so equipped are given the advantage of a special rate. For the benefit of our readers we have had photographed the smoke-detecting device as installed on board the R. M. S. "Lusitania," where it will be situated back on the bridge. In the "Mauretania" it is housed in the wheel house, and the change will also be made on the "Lusitania." It will be seen that the apparatus is very heavily protected against the weather. There are eight pipes on the "Lusitania," as she was built primarily for heavy passenger traffic and cannot be regarded as essentially a freighter. The steamship "Coamo" of the New York and Porto Rico Steamship Company, having a plurality of holds and bunkers, has twenty-two pipes, and instead of being on the bridge, the device is located in the saloon where it can be seen by all. It is most gratifying to note that this invention has been thought worthy of installation on the two leviathans of the sea. The jury is to be congratulated for the faithful performance of their duties, and for so worthy an award.

After the presentation of the SCIENTIFIC AMERICAN medal, the medal offered by Mr. Francis A. Richards for the best in the field of motor vehicles was awarded to the Non-Explosive Safety Naphtha Container Company, with honorable mention to the Rutherford Wheel Company. The medal offered by the Travellers' Insurance Company, for the best invention in the department of mines and mining, was not awarded. As soon as the committee of direction, which is composed of editors of nineteen technical papers, have decided on the field of industry for which the next SCIENTIFIC AMERICAN medal will be awarded, we will give ample notice to our readers and will give the conditions which will surround the competition.

The Scientific American Medal.

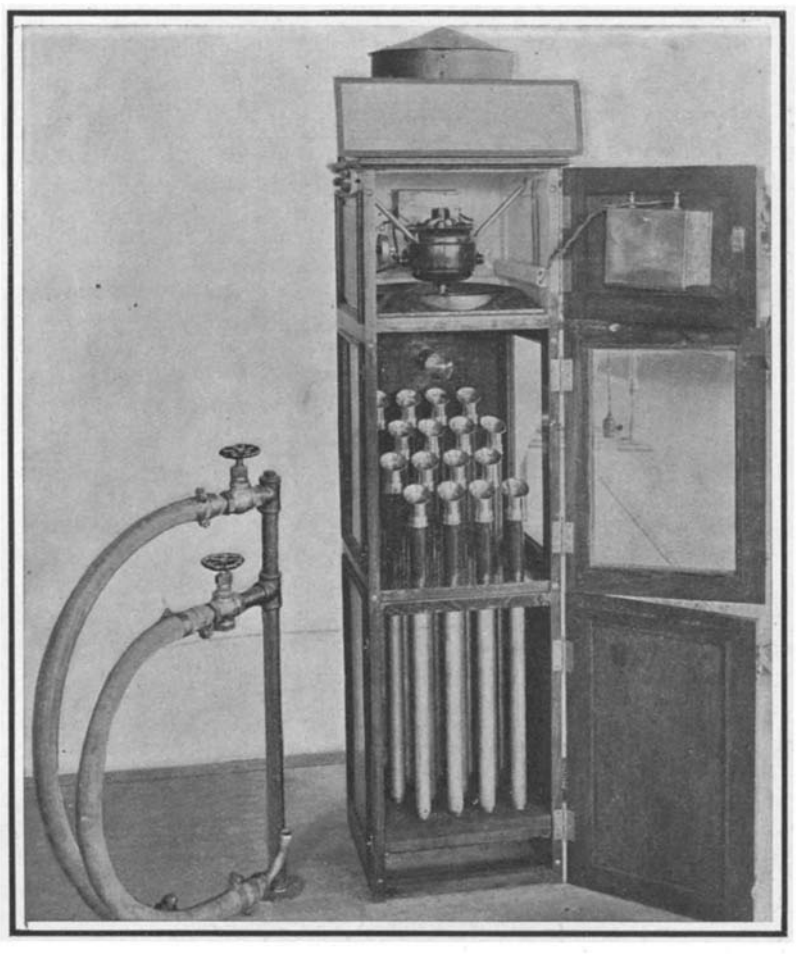

THE RICH FIRE INDICATING AND EXTINGUISHING SYSTEM.

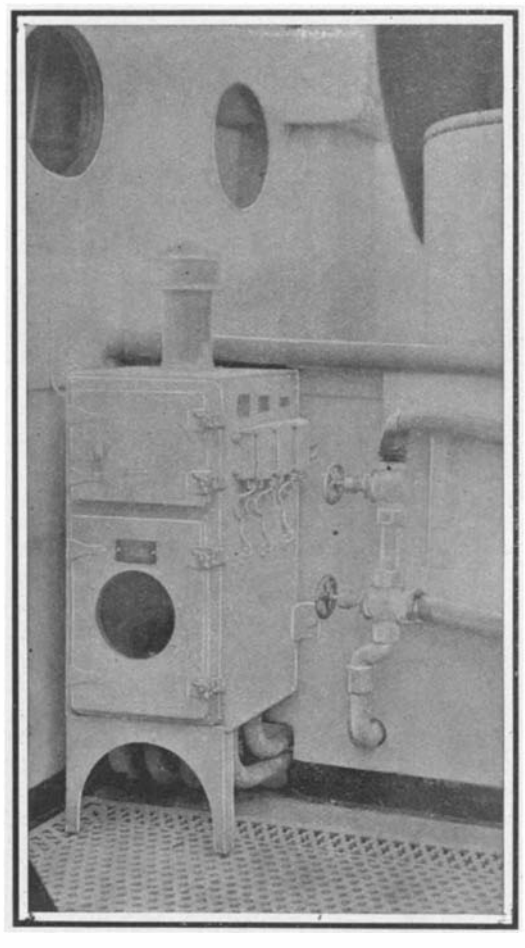

THE SYSTEM INSTALLED ON R. M. S. "LUSITANIA."

The Amount of Rainfall Over the Surface of the Earth.

The discussion of observations on rainfall made first by Sir John Murray and later by Bruckner and Fritsche permits an estimation to be made of the mean rainfall on continents, which is found to be about 30 inches per year. The rainfall on the ocean is more difficult to measure, but it has been estimated by Supau; and Fritsche, taking account of all the known facts, estimates the mean annual rainfall for the entire surface of the earth at about 36 inches. Making use of this number, it is easy to calculate that the total rainfall amounts to 464 million millions of metric tons per year, 1,272 thousand millions of tons per day, 53 thousand millions of tons per hour, 883 million tons per minute, or 15 million tons per second.

According to a report issued by the German Colonial Department, the trade in cement in German East Africa is increasing, not only with the official houses and the natives, particularly on the coast. Imports into the colony rose from 2,482 tons in 1905 to 4,437 tons in 1906, not including importations on behalf of the government. While this increased trade has chiefly benefited German houses, there is nevertheless a chance for other countries to take a share. Belgium, for example, has already obtained a footing. The latter country sends cheaper kinds in wooden barrels, while Germany supplies Portland cement in metal cylinders. Prices vary from 10 rupees per 400 pounds for cheap qualities to 14 rupees for the best. A rupee, in American money, is equivalent to nearly 50 cents

THE LARGEST REFLECTING TELESCOPE IN THE WORLD.

BY GRACE AGNES THOMPSON.

The astronomical observatory connected with Harvard University has just completed the mounting on its grounds at Cambridge, Mass., of a 5-foot reflecting telescope, purchased from the estate of Dr. A. A. Common at Ealing, England, which is at present the largest astronomical instrument in the world.

The biggest telescope in the world is an expression that has changed its meaning a number of times. A few years ago it was an instrument which we would call very small to-day—only a few inches in diameter. Gradually the size of each new instrument was increased, until people spoke of the 40-inch Yerkes telescope as the largest telescope in active use in the world, and indeed it is still the largest refracting telescope in the world. For until certain difficulties in the making of large disks of optical glass have been overcome, it is probable that no larger lens will be successful, and reflecting telescopes must do all the work required of a very large instrument. The Common telescope is 20 inches wider than the diameter of the Yerkes.

The largest telescope ever constructed was a 6-foot instrument made by Lord Rosse in 1842, and set up in the park of his castle in Ireland. But for various reasons this telescope was not long of any use, and it was abandoned many years ago. It is an interesting relic, still to be seen with its mirror of metal and its clumsy mounting at Parsontown, Ireland. The Common telescope has an excellent mirror of optical glass, and is mounted in a wonderfully ingenious and practical way. Only the principal portions of the original instrument have been used by the Harvard Observatory, and an entirely new system of control has been worked out, by which electricity has been called into a field heretofore untried. Even the mounting of this telescope is as remarkable as it is unusual. Instead of being supported by a pedestal or foundation pier of cast iron, cement, or masonry firmly built upon the ground, like all other large equatorial telescopes, it is held in position by a hollow cylinder that floats in a tank of water.

For this, a deep excavation was made on the spot where the telescope was to stand—the first sod being turned September 28, 1904—and a tank was constructed with thick walls of solid concrete, 15 feet deep at the farther end and 21 feet long, the bottom sloping upward from the deep end at an angle of about 45 deg. to the surface of the ground. In this tank the water-tight steel float or cylinder, which is 18 feet long and 7 feet 8 inches in diameter, is ballasted at the same angle as the bottom of the tank, this angle being that of the celestial pole as measured at Cambridge, and the cylinder acting as the polar axis of the telescope. The buoyancy of the water supports its weight, and delicate pivots at each end serve to steady it in position and allow it to turn readily. Above this, and securely attached to it by a strong fork and bolts, is the tube of the telescope, which is seen in position in the accompanying photograph. The tube is not circular, as in most other telescopes, but rectangular. Nor has it solid walls. The upper part of the tube, for a distance of 15 feet, is a skeleton framework of angle iron, with an inside measurement of 6 feet, which is now covered with heavy canvas. The lower end, which contains the mirror and is bolted to the iron fork just mentioned, is a hollow cube with sides 6 feet in length that are made of steel plates. The whole structure weighs over 20 tons, but is so delicately poised that it appears to have no weight at all, and it can be moved in any direction, up, down, or sidewise, without the slightest jar or slip. The telescopes in most observatories are handled by elaborate mechanical devices including clockwork that runs by a system of weights, but the Common telescope is moved and controlled entirely by electricity. However elaborate and ingenious, hand machinery must always be crude and inconvenient. Electricity insures a nicety and regularity in moving and guiding an instrument that can be fully depended upon, and at the same time it simplifies the mechanism. The Harvard Observatory has been the pioneer in demonstrating this fact. For several years all the clockwork required for following for the various instruments here has been driven by electric motors. The necessary mechanism for this is the result of much thought, invention, and experiment on the part of Mr. Willard P. Gerrish, of the observatory, under whose direction the Common telescope has been installed. Electric power is applied not only to the clockwork, but to the mechanism for handling the Common telescope. At no other observatory is electricity so employed. The eyepiece of the Common telescope, to which the image of the star is carried by a system of mirrors, is situated at a desk in the "observing room" in the second story of the small building shown in the photograph. Small switches located at the same desk control motors and clutches, by means of which the telescope may be swung at different speeds. A small motor synchronized by an accurate clock gives a uniform motion for following, while dials and indicators at the recorder's desk show at a glance the exact position of the telescope and the motion that is being imparted to it. Other dials register automatically the measures made by photometric apparatus used by the observer at the eyepiece. Thus observer and recorder may work together comfortably in a warm room, whatever the conditions in the open air.

The Observing Room of the Common Telescope. The Eyepiece of the Telescope is Under the Window.

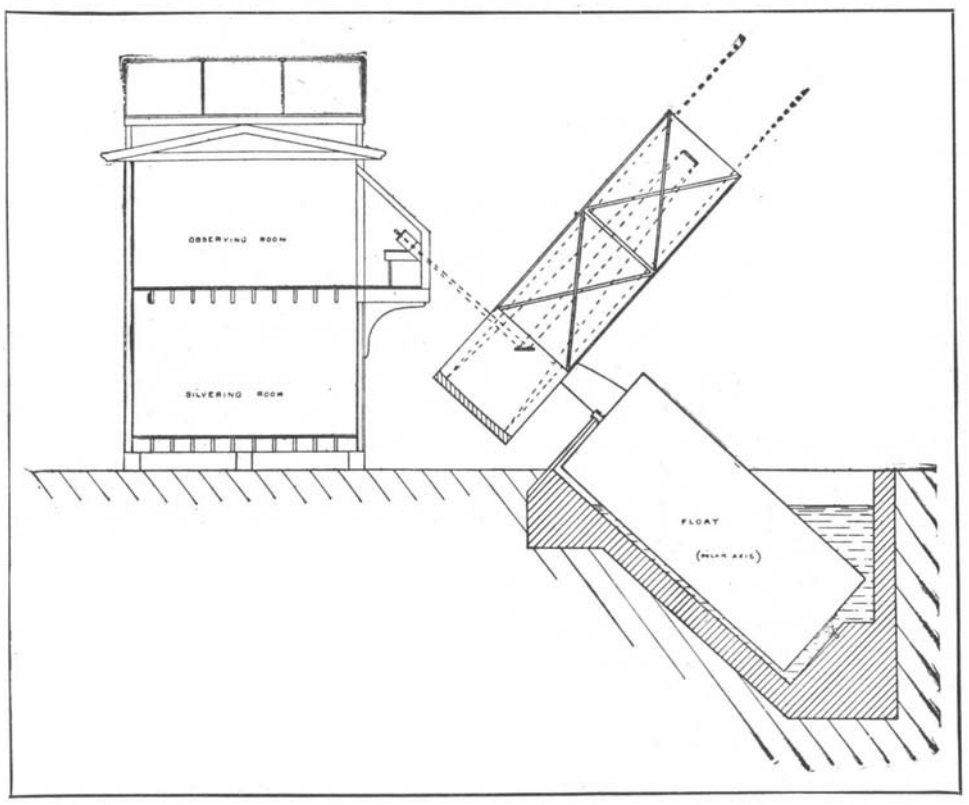

Diagram of the Common Telescope, Showing Manner of Mounting.

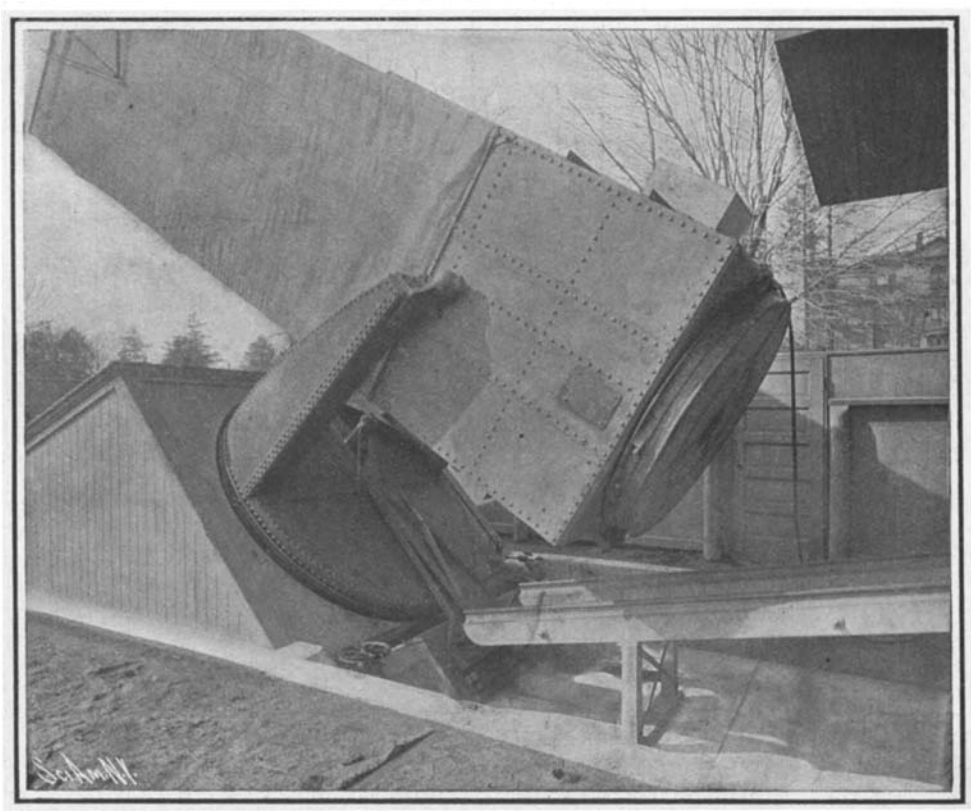

The Lower Part of the Common Telescope and Its Support on the Float. The Image is Reflected to an Eyepiece in the Building at the Right.

On the first floor, under the observing room, is the silvering room, where the great mirror, which is a disk of glass 5 inches thick and 60 inches in diameter, weighing with its cell nearly two tons, may be rolled in over a kind of railroad on to the silvering table, when it requires a recoating of silver.

One other fact connected with this telescope is interesting. It has been mounted in the open air. This is a very unusual procedure, but is expected to prove as successful as convenient. It is an experiment made chiefly as a matter of economy, since in dispensing with any dome or shelter over so large an instrument, a very considerable expenditure has been saved without any injury whatever to the instrument.

The Common telescope is a modified form of the Cassegrainian type; that is, the light rays, after passing down the length of the tube to the great mirror, are reflected back to a second, convex in form, placed in the axis of the tube within the focal lengths of the rays, from this again toward the large mirror to a third placed diagonally, by which the image of the star is sent into the eyepiece. As has been stated, it is also an equatorial; in other words, a telescope mounted so that its motion is on an axis parallel to the earth's axis, an inclination which corresponds to the latitude of the observatory, while the telescope proper is attached to this polar axis by means of a second axis, called the declination axis. Since both the telescope and the polar axis rotate freely, by this double motion, when the image of a star has

once appeared in the field of the telescope, a rotation of the polar axis east to west in sidereal time makes the telescope follow the apparent motion of the star, so that it remains constantly in the field until it has passed below the horizon. The Common telescope is, therefore, not only well adapted to photographic purposes, as intended by Dr. Common, but to the photometric work to which it has been assigned at Harvard Observatory.

This photometric work, or measuring the light of the stars, has been an important part of the routine in Cambridge for more than a quarter of a century, and is the chosen life work of Prof. Edward C. Pickering, director of the observatory, who devotes to it from two to four hours of each clear night. He has determined the light of over four thousand stars, and made more than one hundred thousand measures of them. But heretofore a 12-inch telescope is the largest instrument that has been available to him for the work, and only stars of the twelfth magnitude and brighter could be measured. The Common telescope, however, from its great aperture, is expected to show stars of the seventeenth or eighteenth magnitude or fainter, thus opening to astronomy a scientific possibility whose value can hardly be estimated.

Disposal of Town Refuse.

Several short papers on the disposal of refuse in American cities were recently communicated by different authors to the New York section of the Society of Chemical Industry, and the papers have been published in the current issue of the Journal of that Society. Hitherto, dumping of the refuse on low-lying meadowland has been the method of disposal most commonly adopted in American towns, although garbage furnaces have been used there to a certain extent for more than twenty years, and Mr. Rudolph Hering states that there is no city in the United States where all the city refuse is mixed and properly incinerated. Referring to the removal of garbage from hotels and restaurants in New York, Mr. Morse says that the quantity of garbage taken away by private agency amounts to from 15,000 to 20,000 tons per annum, but that the best hotels are now recognizing the advantage of a garbage destructor. At the new Hotel Astor a destructor equipped with a boiler for low-pressure steam is about to be installed. Some interesting information concerning the work of the New York Department of Street Cleaning is contained in the paper communicated by Mr. Edward D. Very. He says that the wastes of New York city are on the average proportioned as follows: Household ash, 47.5 per cent; steam ash, 18 per cent; street sweepings, 18.5 per cent; rubbish, 6 per cent; garbage, 10 per cent. The garbage received at the reduction plant in Jamaica Bay contains 71 per cent water, 6 per cent rubbish, 20 per cent tankage, and 3 per cent grease. The grease is extracted by digesting the garbage with steam and then passing the garbage pulp through hydraulic presses to express the grease and water. The grease is of a low grade and has a dark brown color. The greater portion is exported, and is used for making soap and candles. Tankage is the solid fibrous matter remaining in the presses, and is used as a fertilizer base or filler. It appears probable that in the largest American towns the European practice of incinerating the refuse in destructors erected within the towns will be generally adopted in the immediate future.

The work of partially reconstructing the wooden lattice-work pillars and supporting platform, on which will rest the shear legs, derrick, boiler, winch, etc., for raising the 160-ton Rammerhead crane at the Keyham Extension, Devonport, is nearing completion, and the mounting of the lifting appliances will coincide with the delivery of the components of the great crane. While the test load was being lifted, the breaking of the supporting pin of the shear leg caused it to collapse and fall to the ground, carrying with it the boiler, winch, and a portion of the platform, and also damaging the pillar nearest the edge of the basin. This accident has necessitated the partial reconstruction referred to, also the retiring and strengthening of the remaining pillars. The complete structure rests on a trolley, with bogie wheels, having a lateral movement parallel to the crane pit.

PANAMA CANAL: FINAL PLAN AND PRESENT CONDITION OF THE WORK.

During the past year it has been our pleasure to record the satisfactory progress which has been made in the development of the final plans, and in the prosecution of the actual work of construction of the Panama Canal. In the present article we give a description of the plans of the canal as revised and finally approved, and statements of the work done by the French company, of the total excavation required for the whole canal, of the amount of work completed since American operations commenced, together with a summary of the appropriations made for the canal and of the money so far expended.

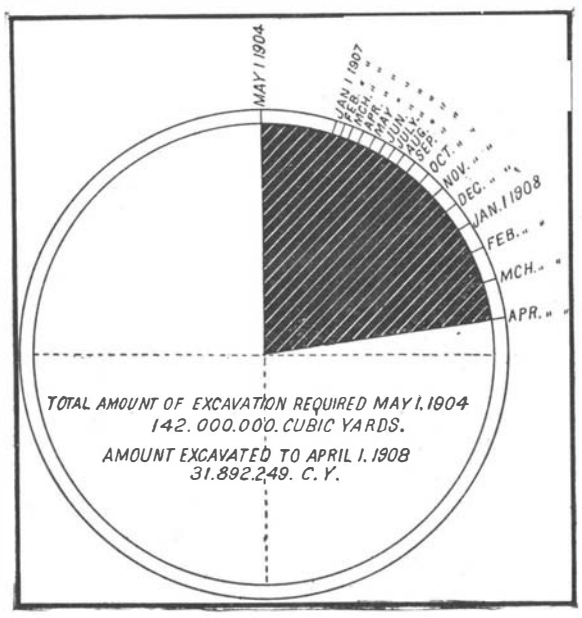

DIAGRAM SHOWING IN BLACK SHADING THE AMOUNT OF EXCAVATION COMPLETED BY APRIL, 1908, ON THE PANAMA CANAL.

Type of Canal.—The canal will have a summit elevation of 85 feet above the sea, to be reached by a flight of three locks located at Gatun, on the Atlantic side, and by one lock at Pedro Miguel and a flight of two at Miraflores, on the Pacific side; all these locks to be in duplicate, that is, to have two chambers, side by side. Each lock will have a usable length of 1,000 feet and a width of 110 feet. The summit level will be maintained by a large dam at Gatun and a small one at Pedro Miguel, making the great Gatun Lake, which will have an area of 164.23 square miles. A small lake, about two square miles in area, with a surface elevation of 55 feet, will be formed on the Pacific side between Pedro Miguel and Miraflores, the valley of the Rio Grande being closed by a small dam and the locks at Miraflores.

Length, Width, and Depth of Canal.—The canal is to be about 50 miles in length from deep water in the Caribbean Sea to deep water in the Pacific Ocean. The distance from deep water to the shore line in Limon Bay is about 4½ miles, and from the Pacific shore line to deep water is about 5 miles; hence the length of the canal from shore to shore will be approximately 40½ miles.

The bottom width of the canal will vary from 200 feet in Culebra cut to an indefinite width in the deep waters of the lakes. The approaches from deep water to land on both sides of the canal are to be 500 feet wide, and the cuts in the shallow parts of the lakes from 500 to 1,000 feet wide. The canal will have a minimum depth of 41 feet.

Amount of Work Done by the French.—The amount of material excavated by the old and new Panama Canal companies was 81,548,000 cubic yards. It was estimated in the report of the Commission for 1901 that 36,689,965 cubic yards of the prism excavated by the French would be useful in the main line of the new canal, to which must be added the prism excavated by the company since the date of that report, 3,510,231 cubic yards, making a total of 40,200,196 cubic yards. This amount will be reduced by the submergence of the channel between Gatun and Bohio, which would have been utilized by the plan of the Commission of 1901, but not in the present project.

Total Amount of Excavation.—The following is the total estimated excavation required, for the whole canal based on the present working plans:

	Cubic yards.
In canal prism	106,931,849
Excavation for locks, regulating works, diversion channel, and sea level channel, from La Boca to Miraflores	28,363,400
Dredging entrance to old canal at Colon for wharf purposes, and to aid in construction of Gatun works; and at Panama to keep channel open to La Boca	7,039,607
Total	142,334,856

For purpose of comparison, it may be stated that the estimated amount of excavation required in the canal prism for a sea-level canal, as recommended by the majority of the Board of Consulting Engineers, was 231,026,477 cubic yards.

Steam Shovel Equipment.—Thirty-two 95-ton, twenty-eight 70-ton, three 45-ton, and one 38-ton steam shovel, or a total of sixty-four steam shovels (of which three have been assigned to the Panama Railroad), are now in commission; six 95-ton, fourteen 70-ton, and seven 45-ton steam shovels are either *en route* or have recently been delivered, and will soon be in use; and in addition, ten 95-ton steam shovels will be delivered in the near future.

Force Employed.—In the month of February, 1908, there were approximately 44,000 employees on the Isthmus on the rolls of the Commission and of the Panama Railroad, about 5,500 of whom were Americans. There were actually at work on February 26, 1908, 32,318 men—25,888 men for the Commission, and 6,430 for the Panama Railroad.

Material Excavated by the United States.—The two accompanying diagrams show with great clearness both the amount of work already completed on the canal and the steadily growing rate of increase month by month, since actual work was commenced by the United States in May, 1904. It will be seen that in the first month, and, in fact, during the first twelve months, the amount of material taken out was insignificant, ranging from 19,695 cubic yards to a maximum of 132,840 cubic yards a month. In the spring of 1905, however, monthly progress began to show a more or less steady increase. This was due to the fact that the preliminary work in the way of reconstructing the Panama Railway, laying new track, and providing suitable dumps, was making headway, and the excavating plant was being placed in position for doing effective work. The largest excavation in any one month in 1905 was 233,974 cubic yards, which was taken out in December of that year. In 1906 the monthly excavation for the first time passed the half million mark, the maximum monthly output being 538,254 cubic yards in October of that year. In 1907 the rate of excavation began to advance by leaps and bounds, rising from 820,099 cubic yards in January to 2,201,734 cubic yards in December. This rate of progress was maintained steadily in January, February, and March of the present year, the highest figure being reached in March, when the enormous total of 3,480,270 cubic yards was excavated in a single month. The amount of excavation in April was somewhat less than this, but it was sufficient to bring the total amount of material taken out under American operation up to about 35,000,000 cubic yards, or about one-

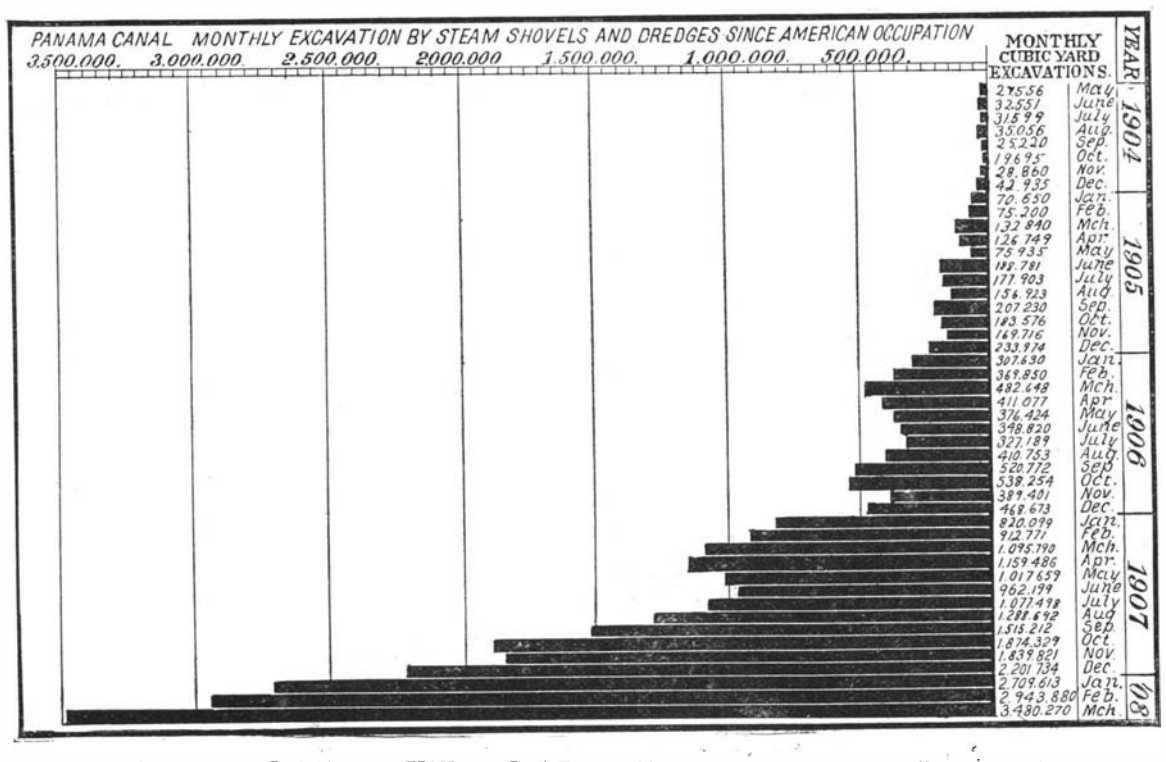

DIAGRAM SHOWING EXCAVATION DURING EACH MONTH AT PANAMA BY STEAM DREDGES AND SHOVELS SINCE AMERICAN OCCUPATION.

fourth of the total of 142,000,000 cubic yards, which must be excavated to complete the canal. If the present rate of excavation be continued, the excavation of the canal could be completed in about three years time. Indeed, the question of the date of completion depends now upon the time it will take to build the great Gatun dam and the flight of double locks, between 3,000 and 4,000 feet in total length, at Gatun. If no unforeseen difficulties are encountered, the canal will probably be ready for opening in seven or eight years' time.

APPROPRIATIONS FOR CANAL.—In addition to the $40,000,000 paid to the French company for its property and rights of all kinds on the Isthmus, and the $10,000,000 paid to the Republic of Panama for the rights granted under the treaty between that republic and the United States, there have been appropriated by Congress the following amounts to continue the construction of the canal: In June, 1902, $10,000,000; in December, 1905, $11,000,000; in February, 1906, $5,990,786; in June of the same year, over $25,000,000; in March, 1907, over $27,000,000; and in February of the present year, over $12,000,000, making a total appropriation to date for construction of the canal of $91,787,468. Of this sum, $5,333,367 was loaned and advanced to the Panama Railroad Company to pay for its re-equipment. The gross sum appropriated to date, including the payment to the French company and to Panama, is $141,787,468.

CANAL EXPENDITURES.—The expenditures for canal work with the exception of some disbursements, such as purchasing material, etc., which it will not be possible to locate through a specified account until their use has been finally determined, are as follows, up to and including January, 1908: For civil administration, $1,844,819; for sanitation, $5,966,501; for construction and engineering, $22,109,757; for municipal improvements, $5,106,056; for purchase, construction, and repair of plant, $25,422,637; making a total expenditure for construction of the canal up to January, 1908, of $60,449,770.

PRESENT ORGANIZATION OF THE COMMISSION.—The present Commission is presided over by Lieut.-Col. George W. Goethals, of the Corps of Engineers of the United States Army, as chairman and chief engineer. With him are associated Major David D. Gaillard and Major William L. Sibert, both of the Corps of Engineers of the United States Army; Civil Engineer H. H. Rousseau, United States Navy; Col. W. C. Gorgas, Medical Corps, United States Army, who has charge of sanitation; Hon. J. C. S. Blackburn, and Mr. Jackson Smith. The work is organized into the eight Departments of Construction and Engineering; Civil Administration; Law; Sanitation; Purchasing; Disbursements; Examination of Accounts; and Labor, Quarters, and Subsistence. The chairman has general supervision of the work of all departments. Each commissioner is in charge of some special department, and all seven are now residing on the Isthmus.

THE MECHANICS OF "AUTOS THAT PASS IN THE AIR."

In our issue of February 9, 1907, we described a somersaulting automobile apparatus which was popularly known as the "auto-bolide" and which was one of the most thrilling attractions of the Barnum & Bailey circus in that year. Exciting as the "auto-bolide" undoubtedly was, the exigencies of novelty demanded something new for this season, and if possible something even more startling. The inventor of the apparatus, Mr. Maurice Garanger, a civil engineer by training, therefore set about the task of eclipsing his previous effort. The result is a novel apparatus, which from the fact that it necessitates the employment of two cars instead of one, is called "Autos That Pass in the Air."

The actual mechanism for projecting the two cars into the air is exactly the same as that of the "auto-bolide." One car is made to describe a somersault, while the other flies beneath it, and safely lands before the somersault is completed. To understand the mechanical principle involved, a brief recapitulation of our previous article is necessary.

Upon an inclined chute a pair of broad tracks are carried. Only the front wheels of the somersaulting car rest on these tracks; the rear of the car is carried by two rollers mounted directly on the rear axle and riding on the tops of two rails placed between the two broad tracks for the front wheels. The two rails on which the rear rollers travel terminate in a much sharper upward curve than the broad tracks. Hence, while the forward end of the car, traveling on the front wheels, follows the main track, the rear end is pitched upward by the rails. The car therefore describes a forward somersault. The second car does not somersault, but travels in an upright position along a curve from the end of the chute to the landing platform. All four wheels travel on the broad tracks previously mentioned; the rails play absolutely no part in the second car's performance.

Now, in order that the first car may describe its somersault and the second travel along its path without colliding, the travel of each must be nicely timed. How this problem was solved, the diagram on the front page clearly explains.

If the two cars are started together they will collide at the point *A;* if the second car is started after the first car by an incorrect interval it may collide with the first car at the point *B*. The time between *A* and *B* in a straight line is ½ second. In somersaulting the first car requires 1 1/5 seconds to pass from *A* to *B*. Hence, we have the problem: If the somersaulting car travels from *A* to *B* in 1 1/5 seconds, and the second car in ½ second, how much later must the second car start in order that it may not collide with the first car at *B* and may roll off the landing platform in ample time to permit the somersaulting car to alight? It was mathematically possible to calculate how much later the second car ought to start; and this Mr. Garanger did. The computation gave him a theoretical interval of 3/10 of a second as the time which must elapse before the second car should start. This value, however, did not take account of the friction of moving parts which was supposed to be the same for the two cars. The second car was automatically released by the first car by the tripping of a lever at a predetermined point in the chute. Time was necessarily consumed in transmitting the power from the releasing device to the latch which held the second car. In order to ascertain how much time was consumed Mr. Garanger ingeniously resorted to the moving picture machine. He took photographs of the cars at the rate of twenty a second. Thus he discovered their exact relative positions for each twentieth of a second, and ascertained how far the second car was from its true position. In one of these moving picture experiments the cars actually collided at the point *B*, and tumbled together on the landing platform because no allowance had been made for the time lost in transmitting the power from the lever released by the first car to the catch by which the second car was held. That lost time, from the moving picture film, was found to be 1/5 of a second. Hence, by starting the first car only 1/10 of a second before the second car, and allowing 1/5 of a second for the operation of the release, the exact interval of 3/10 of a second was obtained, on the maintenance of which the safety of the performance depends. Hence, when the first car is at *A*, 1 1/5 second distant from *B*, the second car is $1/2 + 3/10 = 4/5$ of a second from *B*. The interval of 3/10 of a second allows not only for the time lost in power transmission, but also for the entire automobile bodies to avoid each other at *B*, and not merely for their centers of gravity to clear.

The chute is 27 meters (88.56 feet) long. Since the cars travel at the rate of 12 meters a second, at the end of the curve, the entire performance lasts just 5 seconds.

In conclusion, it should be stated that the second car rolls off the landing platform, while the first or somersaulting car drops on all four wheels on the platform and remains there. The enormous living force of the car is taken up by twelve powerful coiled springs carrying a platform, each spring absorbing a shock equivalent to a weight of 2,200 pounds (1,000 kilos) and compressing one foot when the somersaulting car lands.

Leather Shoes for Horses.

A new market for leather, according to Le Franc Parleur, is to be found in Australia, concerning which this French journal says:

In districts of Australia the horse is shod with leather instead of iron. The feet receive better support. This novelty is employed only in regions where the ground is permanently covered with grass or fine sand. In a country like Australia, where stocks are sometimes scarce and a horseman may experience great difficulty at a critical moment in finding a horseshoe, such an innovation is a useful novelty. With extra shoes whose weight is a trifle, and which can be fitted without trouble, it is practicable to travel without fear of the horse losing its shoe and being injured. Though the leather shoe is more expensive than the iron shoe, the higher price is repaid by the advantages gained.

In some quarters the horses were never shod with iron. Probably shoes, like drivers, will be supplied before long, thus avoiding the disagreeable experience of a horse's hoof wearing too rapidly. It is not impossible the innovation will soon extend to every country where the nature of the soil permits it to be used.

The new experimental furnace at the Noble electric iron smelter at Heroult, on Pitt River, near Redding, Cal., has been run continuously for some time, turning out 2,400 pounds of pig iron every twenty-four hours. The new furnace is the design of Prof. Dorsey Lyon, of Stanford University, who superintended its construction and is directing its operation. A recent test run was very satisfactory, the furnace being tapped regularly every four hours. The Lyon furnace differs from the Heroult electric furnace in that it is operated by a single-phase current, the other being of the three-phase type.

Correspondence.

Prof. Newcomb and Aeronautics.

To the Editor of the SCIENTIFIC AMERICAN:

In the North American Review of March, 1908, Prof. Newcomb applies the one, two, three dimension rule to aerial navigation by airship and by aeroplane, much to the disadvantage of the latter. If one of two similar airships has one dimension twice that of the other, it has four times the surface, and eight times the contents. The weight of its envelope is little over four times as great, but its gas has a lifting capacity eight times as great. It may carry an eight times heavier engine, whose eight-fold power more easily overcomes the fourfold resistance of its surface, and it carries its eightfold load faster. These principles are applied with the same results to water navigation. The lifting power of an aeroplane depends, however, not on its contents, but on the surface of its planes. If one of two similar aeroplanes has one dimension twice that of the other, the surface of its planes or its lifting power is four times as great, while its weight is eight times as great. The smaller machine is therefore the more efficient. There is a practical limit to size; this is about reached in the Farnam machine, etc.

The author is applying the principles of physics to the problem, but has he applied them to his statement that the fourfold area will have but a fourfold lifting power? Consider two such planes falling with their surfaces perpendicular to the force of gravitation. Air must pass from beneath each more or less equally and horizontally in all directions, and must close in from above in something of the same way. To get around the larger surface, air must travel practically twice as far, and if the two surfaces fall at the same rate, the air must travel twice as fast. The falling planes furnish energy for this movement of the air. Kinetic energy $= \frac{1}{2} m v^2$. Fourfold energy is therefore required to drive each molecule of air at this double rate, and as there are four times as many molecules to be driven from under the larger surface, sixteen times the energy is required to make the larger one fall at the same rate as the smaller. But it weighs only eight times as much, therefore the advantage is in its favor. It is twice as efficient.

According to these principles, the larger the parachute the more slowly it should descend with a proportionate load. This should be tried, and perhaps has. Only large birds soar. The humming bird or the bumble bee probably could not. It is true that the smaller ones rise more easily and manipulate themselves better, but it is generally true that small animals are proportionately stronger than large ones. The large bird has strength for but a moderate rate of wing vibration, but this accomplishes the same result as the more rapid vibration of the wings of the small bird. According to this fourth power of the dimension rule, the air below the large wing is in effect more solid. If the large bird had strength proportionate to the small one, neither could he flap his wings as fast, nor would he need to.

Does this apply to aerial navigation as well as to a body falling through the air? Evidently the beating of the wing of a bird or an orthopter is equivalent to the falling of a plane, and it applies to them. But the case of the aeroplane or helicopter is somewhat different. The aeroplane moves over the air in but one direction, instead of the air under it in all directions. These cases are, however, not essentially different, and the moment the plane begins to fall, they become similar. Again, the plane affects not merely the surface of air in contact with it, but affects the air to some depth, the larger plane proportionately deeper, and the matter is after all a three-dimension one.

There are too many unknown factors in the problem of aerial flight for even so eminent an authority as Prof. Newcomb to argue the subject *a priori* and without further experimental data.

ELBERT E. CHANDLER, Ph.D.

Chemical Department, Pomona College, Claremont, Cal.

"Rail-less Tramways."

A short description is given in the Practical Engineer of a number of "rail-less tramways" now in operation in different parts of Germany, for the conveyance of both passengers and goods. The cars consist of dirigible vehicles, propelled by electric motors, which receive their current from an overhead conductor, supported on trolley poles. The cars have sufficient freedom of movement to enable them to turn aside about 12 feet in either direction from their wires. When two cars, traveling in opposite directions, meet, the contact rods of one are removed from the wires, and replaced when the other car has passed by. The first tramway on this system was constructed in Saxony, in 1901. Many systems of this kind have been described in these columns.

KNUDSEN'S PROCESS OF TRANSMITTING PICTURES BY WIRELESS TELEGRAPHY.

BY THE ENGLISH CORRESPONDENT OF THE SCIENTIFIC AMERICAN.

Interesting demonstrations were recently made in London with a new invention for the transmission of pictures, an invention which not only indicates a new development in such work, but marks a novel application of wireless telegraphy. The device and process have been evolved by Mr. Hans Knudsen, a well-known Danish inventor resident in England. Its principal characteristics are the simplicity both of the apparatus and its operation, the speed with which illustrations of all kinds can be transmitted, the omission of selenium cells, and the lack of dependency upon sources of light in any form.

The accompanying photographs illustrate the transmitting and receiving stations respectively, this particular apparatus being devised for dealing with pictures up to 4 x 5 inches. The transmitting station consists of a traveling table, upon which the illustration to be dispatched is carried, and which travels in two horizontal directions only—longitudinally and transversely. The transmitter comprises a finely-balanced needle or stylus, carried at the apex of an inverted cone suspended from a thin strip of steel, which constitutes a spring, supported at either end by suitable holders, and which is capable of tension adjustment by means of a small screw. Above the stylus is a small contact, which, when the needle and its cone are forced upward and establish contact therewith, completes the electrical circuit. The impulse is passed through the coil carried in the box forming the baseboard of the table, thence to the three spark balls shown at the back of the instrument. The carriage carrying the imprint of the picture to be transmitted moves to and fro beneath the stylus, making a continuous series of contacts in a manner explained later, the impulse passing to the aerial from the uppermost spark ball, to which it is connected at one terminal, while the negative wire is earthed from an opposite terminal on the spark ball.

The receiving station comprises an instrument similarly provided with a traveling carriage and table, moving synchronously with those of the transmitter. Above this table is carried a small box containing a very sensitive relay working in conjunction with the coherer, and actuating a slender lever-movement stylus or needle. The stylus or needle also moves longitudinally and laterally in a horizontal direction over the plate fixed to the table and records the impressions as indicated by the electric contacts. Thus a negative impression of the transmitted picture is produced, from which positive imprints can be secured by ordinary photographic contact printing.

The picture, a photograph, drawing, or painting, must be especially prepared for the transmitting apparatus, an operation, however, which occupies not more than an hour. The picture is photographed through a screen, as in the half-tone process, the only difference being that in this instance the screen is ruled in straight lines about 60 to the inch. Each line is broken up into little dots, numbering about 200 to the inch. The positive secured in this manner is recorded upon a collodion plate, upon which the image stands out slightly embossed. Those parts which are perfectly clear, and consequently easily soluble in the developing solution, are naturally the deepest, the insoluble portions or dots projecting above the level of the plate to the greatest degree, the height of other projecting dots varying according to the gradation of the halftones.

At present the negative plate used for the receiving apparatus is covered with a film of lampblack, which

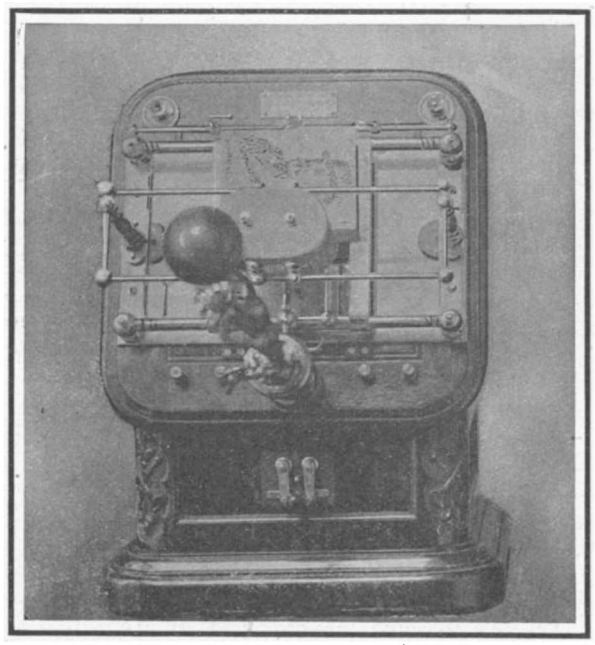

Plan View of Receiver Showing Negative Received.

has been found excellent for the purpose. Both plates are fixed securely to their respective tables, and the carriages set for operation. Each instrument is connected at either end with the terminals of the Morse keys, by which etheric messages are sent.

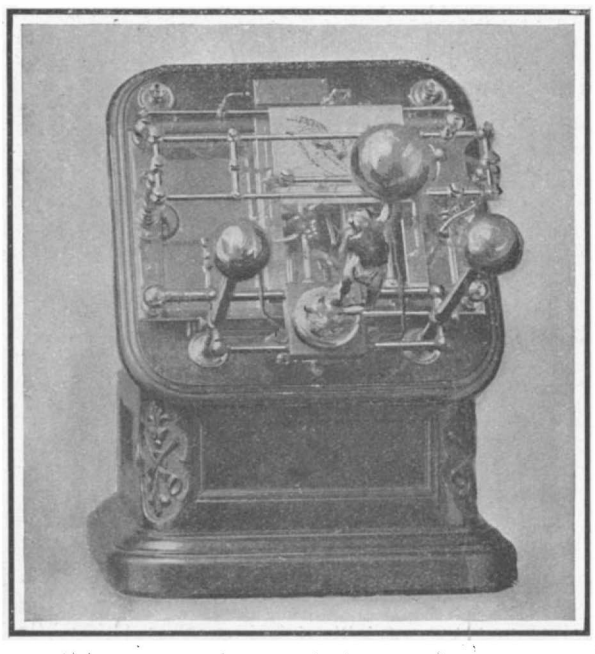

Plan View of Transmitter Showing Traveling Carriage Carrying Picture.

In actual operation, the carriage of the transmitter is set so that the transmitting needle rests at the beginning of the first line of dots, the receiver being also similarly set. The transmitter then automatically proceeds. The needle in transversely passing over the plate along the line of dots is so set that it must engage with the rough surface dots. As it comes into contact with each dot, the needle is naturally lifted in order to surmount the obstacle, which action establishes connection with the electrical contact immediately above, and completes the circuit momentarily. An electric impulse is thus dispatched. Those parts of the picture which are quite clear, and consequently the deepest indentations on the collodion surface, allow the needle to pass along without forming any contact. Because the dots lie so close together, they seem like straight continuous lines.

At the receiving station the process is reversed. The receipt of an electric impulse indicating the passage of the transmitting needle over a dot causes the sensitive needle connected with the delicate relay to depress and strike the smoked negative plate on the table, piercing the lampblack film and thereby leaving a pinhole of clear glass. A succession of continuous signals, indicating a dark part of the picture, is reproduced in such a series of sharp dots that practically a continuous line of film is removed or scratched, while similarly, when the lightest part of the picture is being traversed by the transmitter, the receiving needle does not depress, thereby leaving the film intact.

When the transmitting needle has reached the limit of the line across the plate, the carriage is stopped and held fast by a small electro-magnetic brake. It then moves forward a space to the end of the succeeding line. A clock movement then establishes contact, the brake is released, and the transmitter restarted. Simultaneously an impulse is dispatched to the receiver, which affects a separate coherer and thereby moves the receiving carriage forward a distance corresponding with that of the transmitter ready for printing the next line of dots. This cycle of operations is continued until the whole picture has been dispatched.

The smoked-glass negative thus produced has somewhat a stippled effect, because the picture is broken up into lines of dots, but this appearance is appreciably removed upon reduced reproduction. To a certain extent it facilitates halftone reproduction. As a matter of fact, it is quite possible to make a printing plate directly if a copper plate is used instead of the ordinary glass negative at the receiver end, and if immediately upon the completion of the picture it is subjected to development in the usual manner.

Owing to the limitations of the apparatus shown in transmitting and receiving pictures up to only 4 x 5 inches, the inventor has now completed a larger machine, taking illustrations up to 8 x 12 inches, but there need be no limit in the size, since the machines can be constructed up to any dimensions required. One great advantage of the larger machines, however, will be the possibility of securing more clearly defined and better tone-graded pictures, which upon reproduction yield a striking photographic effect.

The machine works at great speed. A photograph up to 8 x 12 inches can be transmitted and received in about ten or twelve minutes. With drawings and sketches a more accelerated pace can be attained, the complete operation occupying approximately three minutes for the same dimensions. The apparatus can be used with any system of wireless telegraphy. It can also be used on ordinary telegraphic wire or cable circuits.

The Transmitting Apparatus.

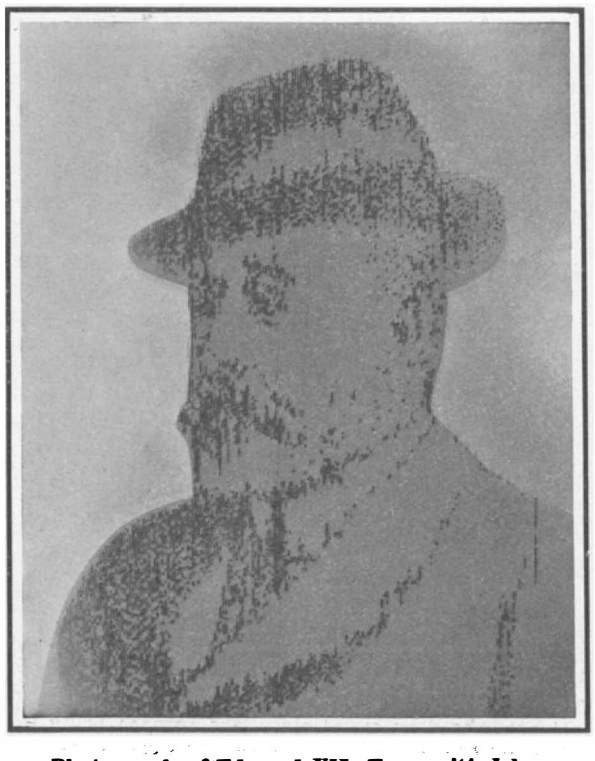

Photograph of Edward VII. Transmitted by Wireless Telegraphy.

The Receiver Showing Relay to Which Recording Needle is Connected.

KNUDSEN'S PROCESS OF TRANSMITTING PICTURES BY WIRELESS TELEGRAPHY.

THE INSECT ENEMIES OF BOOKS.

BY JACQUES BOYER.

More books and manuscripts have been destroyed by insects than by fire, water, rats and mice combined.

For many centuries librarians had observed depredations due to insects without knowing their precise cause. In 1721 Frisch of Berlin found in a crust of dry bread the larva of an insect (probably *Anobrium*) which bored holes in books, manuscripts, and paintings. In 1742 Prediger suggested methods of protecting books from the ravages of insects, and in 1754 the Gentleman's Magazine of London recommended dusting the shelves and the fly-leaves of books with pepper, pulverized alum, and other insecticides. These palliatives proving insufficient the Göttingen Academy of Sciences, twenty years later, offered a prize for the discovery of injurious species and methods of destroying them. The subject has been thoroughly investigated by modern entomologists but no universal remedy has been discovered.

One of the most formidable of the insect pests is the bread borer (*Anobrium paniceum*) which is found in all climates, not only in libraries but in rye bread, whence its specific name. The beetle is one-twelfth inch long, downy, light brown, and striped lengthwise. The eggs are laid between the edges of the leaves, in scratches in leather bindings, chinks due to imperfect

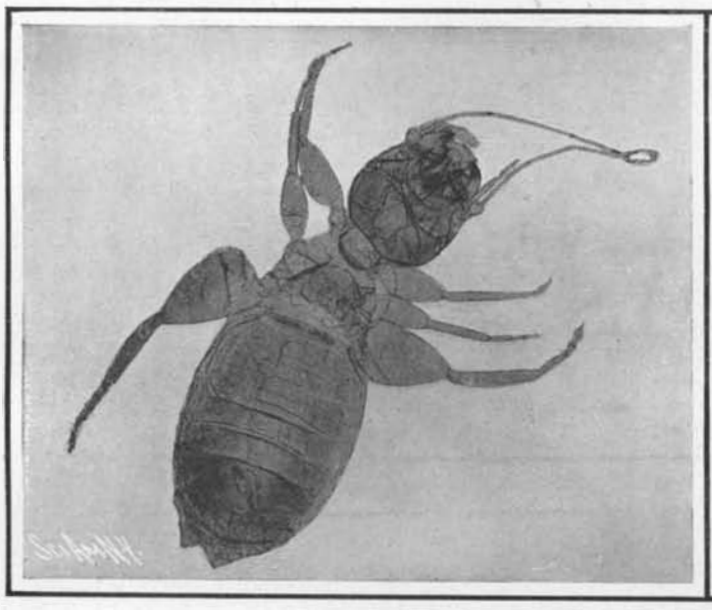

***Psoque* or Book Louse.**
(Magnified about 60 times.)

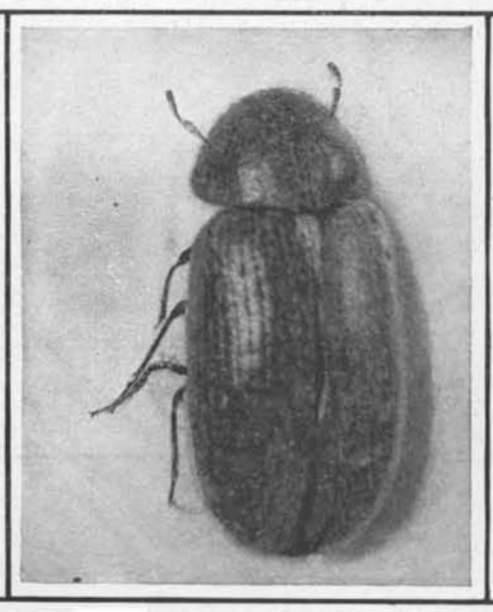

Bread Borer (*Anobrium paniceum*).
(Magnified about 4 times.)

Silver Fish (*Lepisma saccharina*).
(Magnified about 3 times.)

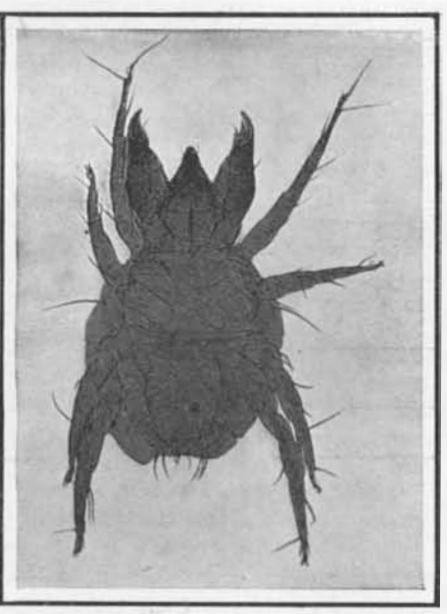

***Chyletus eruditus*, a Useful "Book Worm."**
(Magnified about 10 times.)

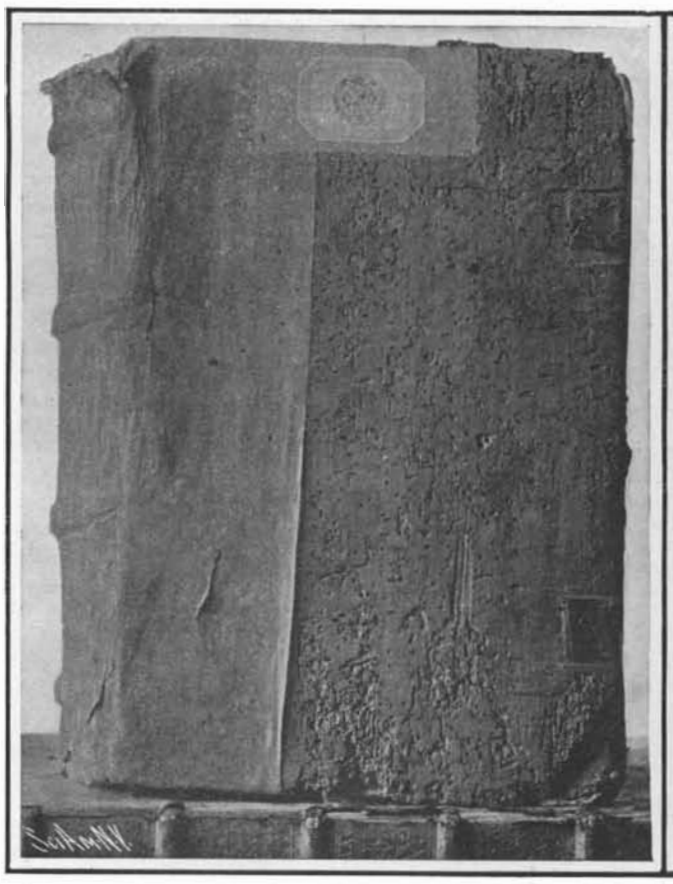

Wooden Binding of Sixteenth Century Riddled by Larvæ of Borers (*Anobrium*).

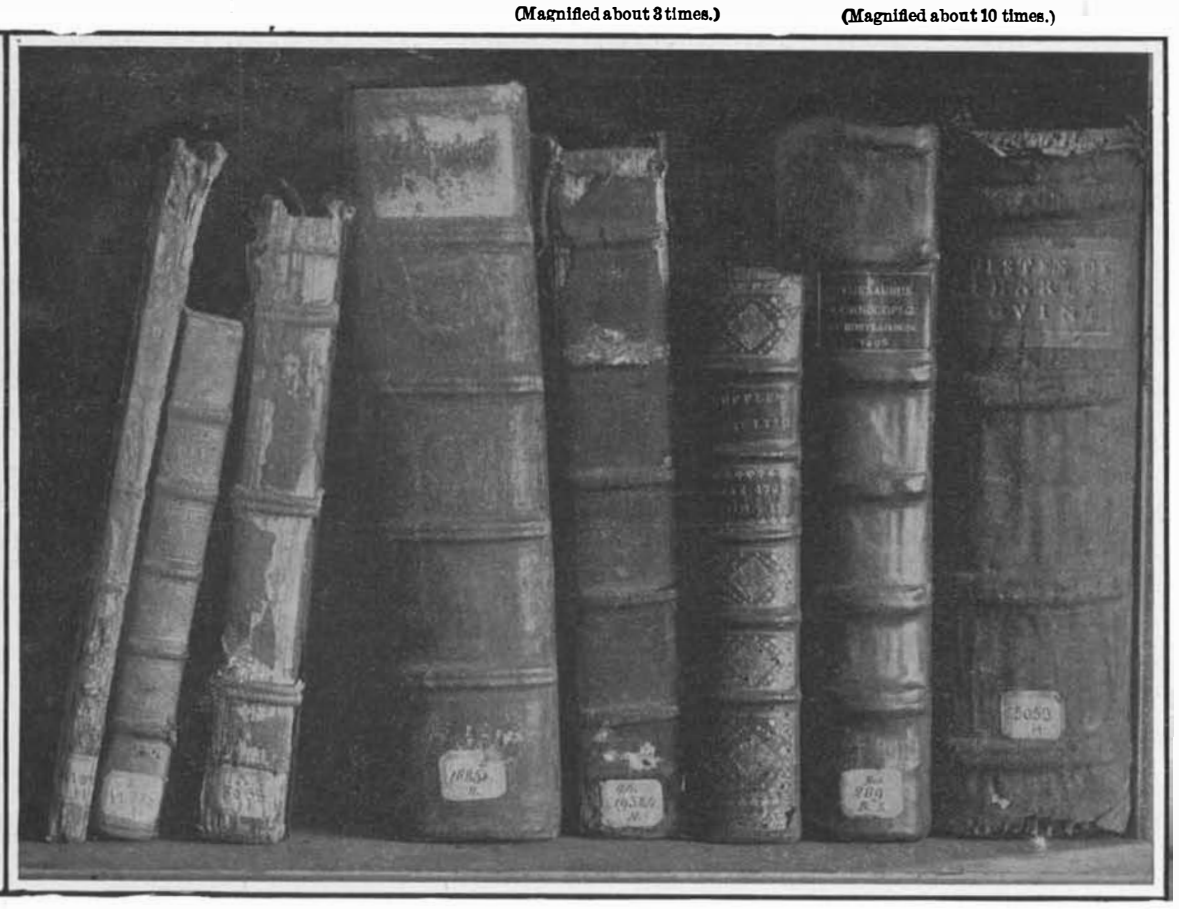

Books Injured by Book Lice, "Silver Fish," etc.

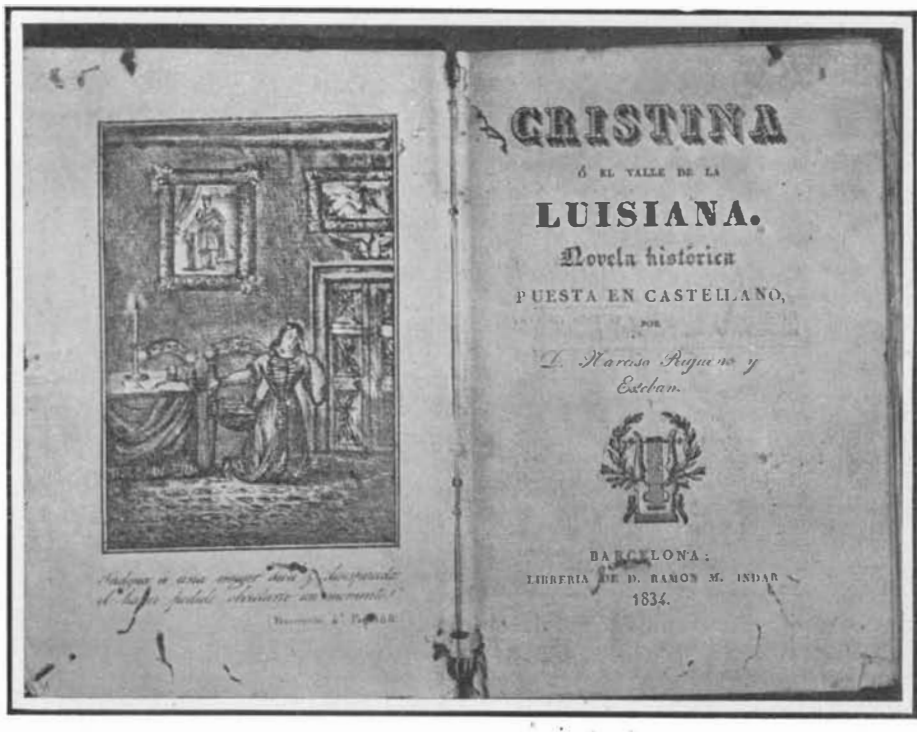

A Recent Book (1834) Injured by Destructive Insects.

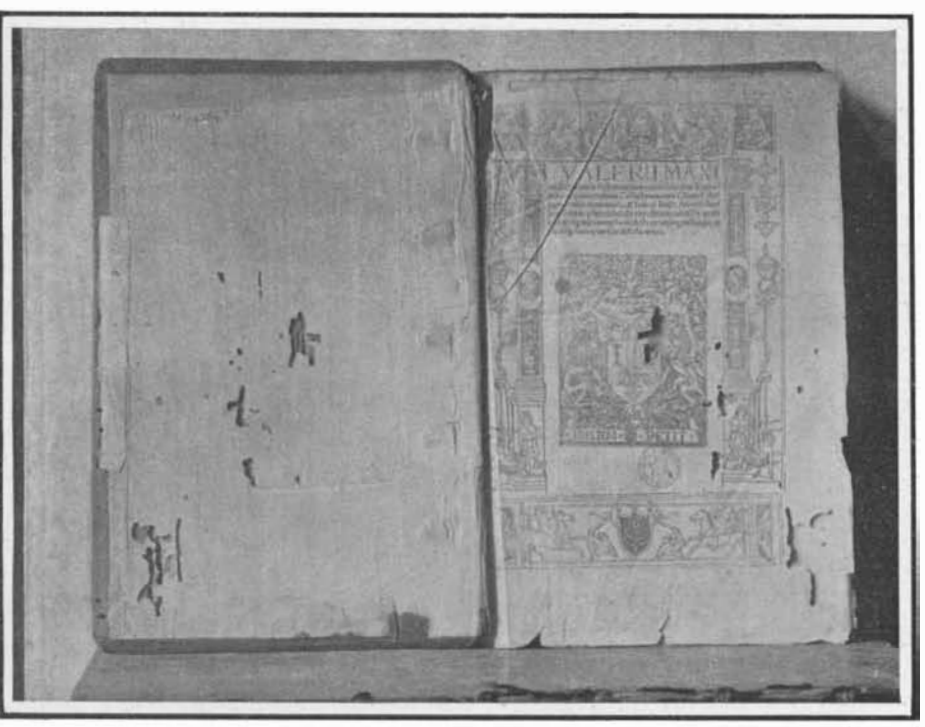

Fly Leaf and Title Page of a Valerius Maximus in the Library of the Arsenal, Paris, Ruined by Insects.

THE INSECT ENEMIES OF BOOKS.

pasting of backs and fly leaves, etc. They hatch in five or six days, in summer, and the larvæ at once bore through the bindings, following the lines of paste. The worm is brownish white, cylindrical, slightly arched and has thirteen segments. The head is brown, scaly, and armed with mandibles which "only cast iron can resist," according to one naturalist. The worm bores long narrow tunnels through paper, leather and wood, leaving a trail of sawdust mixed with white excrement. The sixteenth century beechwood cover, herewith illustrated, is a fine specimen of this bookworm's work. Growing rapidly and molting repeatedly, the worm finally enlarges its tunnel to the size shown in the cardboard covers of the Valerius Maximus. Pupation occupies twenty days and takes place in enlargements of the tunnels very near the surface so that the perfect insects have to bore through only a thin shell, leaving the large round holes so common in old bindings. Pairing takes place in early summer in the tunnels which are not abandoned until the supply of food fails, when other quarters are sought. Sometimes not a single worm or beetle is found in a volume riddled with holes—a fact that has puzzled many a librarian.

Of the various methods that have been recommended for ridding libraries of borers the only effective one consists in exposing the infested volumes to the vapor of carbon disulphide, by putting them in an airtight metal-lined box with a saucer of that liquid. Thirty-six hours of this treatment suffices to kill beetles, pupæ, larvæ, and eggs. The unpleasant odor of the disulphide disappears after brief exposure to the air and the only objection to the use of this substance is its inflammability and the explosive character of its vapor when mixed with air. Hence the fumigation should be done in the daytime in a well ventilated room and the box should not be opened near a flame. On the other hand, the process possesses the merit of cheapness, as the disulphide costs only 9 cents a pound and an ounce suffices to fumigate a box of 70 cubic feet capacity.

Another species of *Anobrium*, the striped borer, found commonly in houses, bores through the shelves and furniture of libraries but does not injure the books directly, unless they are bound in wooden boards.

The larva of the *Dermestes*, on the other hand, has a particular fondness for bindings of leather and parchment. In May or June the females enter the library and lay their eggs, usually, on the edges of books in contact with the wall. As soon as the larvæ are hatched they begin their work of destruction, not making long regular tunnels like the borers but going in all directions and gnawing and disintegrating the bindings in an extraordinary manner. Sprinkling with benzine and fumigation with carbon disulphide have been recommended for their destruction.

Dr. Hagen, of the Museum of Cambridge, Mass., has found traps baited with cheese very efficacious.

Another beetle, the *Anthrena*, is occasionally very destructive to books, though it prefers skins, furs, and "stuffed" animals.

Far worse is the *Lepisma*, or "silver fish," so-called from its shape and shining scales. It is a little wingless insect of the order *Thysanura*, which undergoes no metamorphosis, and infests wardrobes and kitchen pantries as well as libraries. The most destructive species may often be seen scurrying away from a book suddenly opened in summer. It has a large head, from which the body tapers to a pointed tail, terminating in three bristles. Its favorite food is paste or glue, to obtain which it destroys titles, labels, and heavily sized paper, respecting only the parts that are covered with ink. It may be caught by cutting notches in the edge of a small box, and inverting the box on a plate containing paste spread on paper. This trap should be placed in the darkest corner of the room. The insects enter through the notches and are easily surprised and destroyed at their banquet. Pyrethrum powder also destroys or stupefies them, but perhaps the best way to get rid of them is to move and air the books frequently, and kill every insect discovered.

Psoques or book-lice are often dislodged from old books kept in damp places and may be seen on library shelves in summer. They are almost omnivorous but especially fond of paste and mold, in search of which they perforate bindings. Their depredations are often erroneously laid to the charge of the bookworms. Pulverized camphor has some effect in driving away the book-lice, and they have a natural and formidable enemy in the *Cheyletus eruditus*. This blind acarian, or mite, which Latreille unjustly denounced as a bookworm, has an oval body, a soft skin, relatively large jaws, and long legs terminating in hooked claws. It swarms in old volumes but it destroys the book-lice, not the books.

The familiar cockroach attacks and devours in its nocturnal raids the paper and bindings of books as well as flour, sugar, and other provisions. The species best known in Europe is the Oriental cockroach (*Blatta orientala*) of Asiatic origin. In the male the true wings are well developed but the wing cases do not cover the abdomen. In the female both wings and elytra are rudimentary. The head is short and bent sharply downward. As in all Orthoptera the larva closely resembles the perfect insect, but is wingless. The female lays her eggs in April or May, and then dies. The larvæ grow slowly, undergoing six or seven changes of skin. Although the cockroach produces only one brood a year it increases rapidly, especially in the tropics. In the State library at Albany, N. Y., the bindings of a hundred volumes were destroyed by cockroaches in a short time.

Another species, the American cockroach, has become acclimated chiefly in hothouses and well heated dwellings in France and England, but it has long ravaged libraries in Brazil, Peru, and Mexico, where its depredations were mentioned by a missionary friar as long ago as 1654.

Among substances inimical to cockroaches we may mention, first, pyrethrum powder. The powder, in as fresh a condition as possible, is strewn on the shelves. In the morning the cockroaches are found paralyzed, and may be swept up and burned. In Germany the gases produced by the combustion of gunpowder are used. The process, as described by Pergaude, consists in compressing slightly moistened gunpowder into cones like those used for Bengal lights, and igniting them, when dry, in the fireplace—a favorite resort of cockroaches. The poisonous gases drive the insects out of the cracks in which they pass the day, and suffocate them, so that they can be gathered and cremated. The process was devised for the purpose of destroying the cockroaches that infest fireplaces and chimneys but it has also been applied, with excellent results, to libraries with cracked walls.

Traps for cockroaches have long been in use. They are of various forms but all are based on the same principle. The simplest is a glass tumbler or other vessel with smooth vertical walls, baited with a little flour. The insects easily reach the edge of the vessel from the floor by crawling up inclined flat strips of wood, placed there for that purpose. Then they fall into the vessel, from which they cannot escape by climbing its smooth walls. In the south of France regular cockroach traps are used. These are square boxes about two inches deep with the outside painted roughly to facilitate the ascent of the insects, the inside finely polished, and the edge curved inward. A saucer of flour and sugar is placed in the box as bait, and a hole in one side, closed by a cork, permits the game caught during the night to be emptied into the fire or a bucket of water in the morning. The destroyers of books that we have described have been selected, as the most important, from the sixty species which, according to Dr. Houlbert, live upon the productions of the human brain.

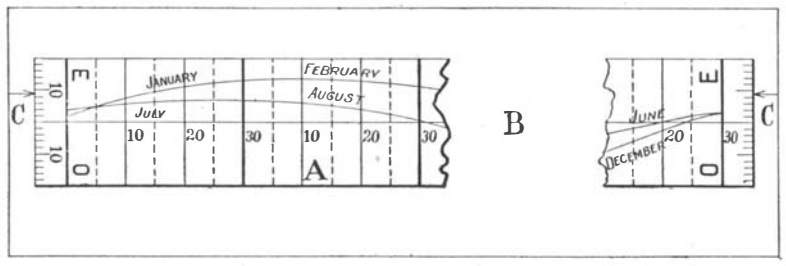

The Adjusting Scale of the Sun Dial.

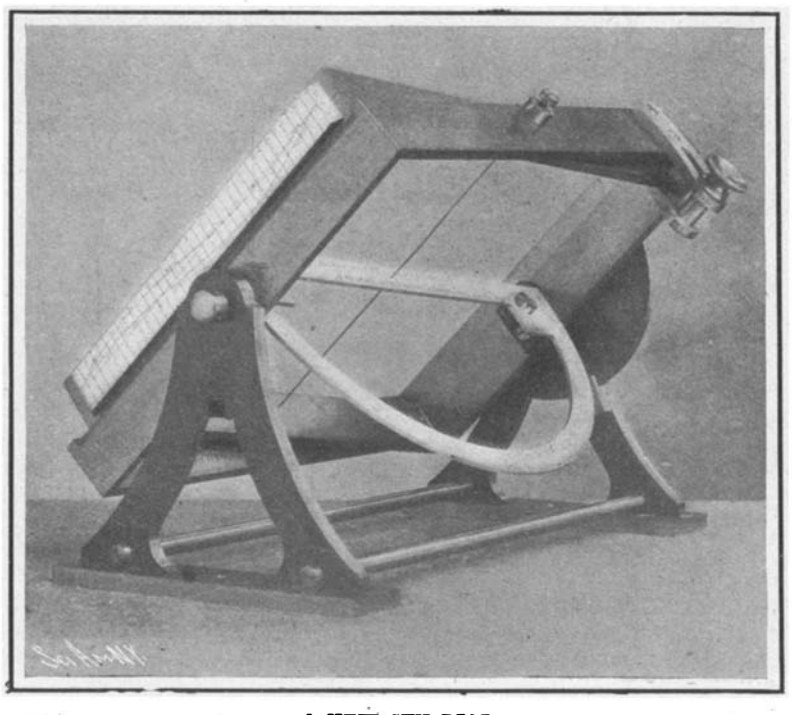

A NEW SUN DIAL.

A NEW SUN DIAL.

BY THE PARIS CORRESPONDENT OF THE SCIENTIFIC AMERICAN.

In former times sun-dials were much in use, but in modern times no one has the idea of consulting a sun-dial for regulating his watch, and these apparatus are now looked upon as simple ornaments. The reason of this disfavor is easy to find; formerly the time which was universally adopted was the true or solar time, and as this is the time which is necessarily given by the sun-dials, these latter were in good repute and could be even used to regulate clocks. At present, on the contrary, the time which is used is the mean time, and it differs from the solar time by a quantity which is variable each day, this being called the "time equation," so that in order to deduce the mean time from the hour shown by the sun-dial, it is necessary to make a calculation. This is not a complicated one, but at any rate cannot be done in practice. In addition, nations have adopted a uniform time which differs from the local time according to the longitude of the place. In America four of these standard times have been adopted, and it is easy to see why sun-dials are considered as instruments of a former age. However, the sun's movement, while regularly variable, is known to within a fraction of a second, and is always reliable. A member of the French Astronomical Society, Vicomte d'Aurelle Montmorin, had the idea of constructing an improved form of sun-dial by which the time can be read with considerable precision and which is arranged to give mean time.

As seen in our engraving, the new apparatus is formed of an equatorial dial to which is given each day a small angular displacement designed to correct the solar time as shown on the dial, at the same time for the time equation and the local longitude. This is done quite mechanically so as to pass from the solar to the legal time. He uses a stretched wire and a half-circle whose center is crossed by the wire. The half circle has a time scale in five-minute intervals, and the whole is carried by a set of two rectangular frames fitted one into the other and turning about two axes which are perpendicular to each other. One of these axes is horizontal and by means of a graduation on the small half-circle seen in the rear, it is made to incline the wire in the direction of the earth's axis. The second axis lies along the wire itself and gives the main graduated half-circle a small displacement for the correction. This latter is regulated as follows: One of the edges of the outer frame is cut in bevel and gives an edge which is exactly parallel to the wire. The inner frame carries a scale lying opposite the former. On this scale are traced two curves showing the time equation for the different days of the year. One of the curves serves for the first six months of the year, and the second for the remainder. A set of points show the day of the month in spaces of five days each, and the ordinates of these different points with relation to a base line traced on the scale are proportional to corresponding values of the time equation. At each end of the scale are placed two graduations in minutes of time marked *E* and *O*. They serve to give the correction for longitude. To do this, we use the two fixed points *C C*, and make the scale slide up and down, fixing the figure corresponding to the local longitude according to scales *E* and *O*, and then screwing down the scale piece. In this case the ordinates of the two curves with relation to the standard line formed by the edge of the other frame represent the amount of angular movement which is used to correct for the time equation and the longitude at the same time.

In practice the apparatus is placed once for all by giving the wire the proper inclination for the latitude, then the scale is used as just stated to give the correction for the longitude. Lastly the wire is placed exactly in the meridian plane. When this has been done we find the hour as follows: Bring the point of the curve for the day in question exactly to the height of the standard bevel edge and fix the frame in this position. Then we read the hour upon the scale of the half-circle. Generally this latter regulation needs only to be done once in two or three days. In principle, for placing the instrument we must trace the meridian line on the plane surface which serves as the base, but as this is somewhat difficult we can use a watch which is regulated within a few seconds of the standard time. We place the instrument as if we wish to determine the time on this particular day, in adjusting, for the latitude, and we correct for the longitude and fix the scale and curve as before. This done,

we displace the instrument until the indications are as nearly as possible in accord with the time of the watch. Thus we can give the proper position once for all. Although the present instrument is not designed as an instrument of precision, it can very well be used to regulate watches within one minute, which is sufficient for most cases.

AN IMPROVED SAW HANDLE.

In the accompanying engraving we illustrate a handle particularly adapted for use with a saw, though it will be evident that it may be used for other tools as well. The handle is so arranged, that it may be adjusted at right angles to or in alinement with the saw

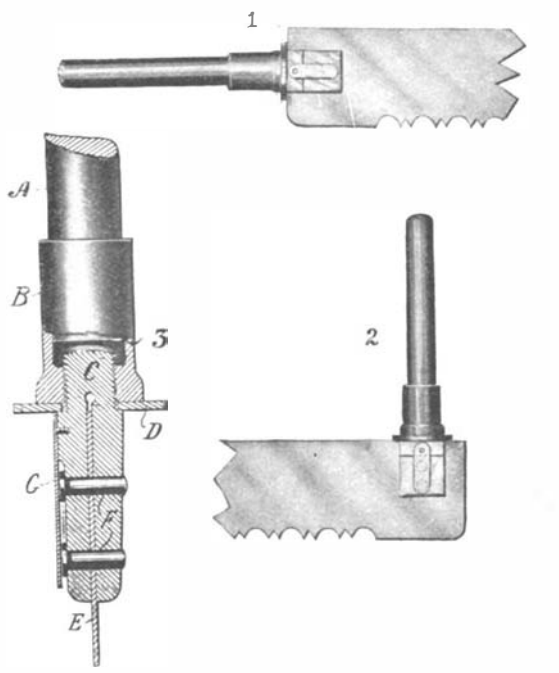

AN IMPROVED SAW HANDLE.

blade. This adjustment permits the saw to be carried without difficulty through the woods, because the handle may be so set as not to project beyond the main body of the saw. The details of the handle are best shown in Fig. 3. The handle proper is indicated at *A*, and fits into a socket *B*. The lower end of the socket is threaded to receive a member *C*. The latter is slotted, and in the slot the saw blade *E* is fitted. Between the member *C* and the socket piece *B* a washer *D* is mounted, and when the socket piece *B* is firmly screwed on the member *C*, it presses the washer *D* into engagement with the back of the saw blade. The saw blade is secured to the member *C* by means of a pair of pins *F*, which pass transversely through this member and the usual holes provided in the saw blade. The pins are prevented from slipping out by a retaining piece *G*, which is pivoted to swing over them. The usual holes in the saw blade are placed at different distances from the edge in various makes; but as the slot in the retaining member *C* is quite deep, these differences will not prevent the handle from being secured to any blade. Figs. 1 and 2 show how the handle may be attached in alinement and at right angles, respectively, to the saw blade. The inventors of this handle are Messrs. E. A. Patterson and E. F. Dickinson, Box 218, Morgan City, La.

RACK FOR COATS, WRAPS, AND OTHER GARMENTS.

Pictured in the accompanying engraving is a rack that should be found serviceable in a great variety of uses. Secured to the dashboard of a carriage or automobile, it will serve as a rest for lap robes and wraps; in railroad and Pullman cars, and in theaters, it may be secured to the backs of the seats to support coats, canes, umbrellas, and the like; while in the home and office it will be found useful as a towel or clothes rack, or a support for newspapers. The device is very simple in construction, and its chief merit lies in the fact that it may be secured firmly in extended position, and when desired may be folded back against its support, so as to offer no obstruction. The details of the rack are shown in Figs. 2 and 3. Two bearings, *A* and *B*, are provided, which have flanges or extensions *C*, whereby they may be secured to any support. The bearings are each in the form of a socket or tube, closed at the inner end but open at the outer end. These socket bearings are adapted to receive the inwardly facing trunnions *D*, formed on the ends of the rack bar. Each socket is provided with a double bayonet slot *E*, engaged by a pin *F* projecting from the trunnion. In other words, each socket is formed with a circumferential slot provided with an axial offset at each end, and according as the pins *F* engage the upper or the lower offsets, the rack bar will be secured in extended or folded position. The spring *G* in the socket *A* presses the rack bar toward the left, and holds the pins *F* in engagement with the offsets. When it is desired to change the position of the rack bar, the bar must first be moved toward the right to disengage the offsets, after which it may be swung on its trunnions until it snaps into engagement with the other pair of offsets. A patent on this rack has just been secured by Messrs. John Boyle and Daniel T. Wilson, of 406 to 412 Broome Street, New York.

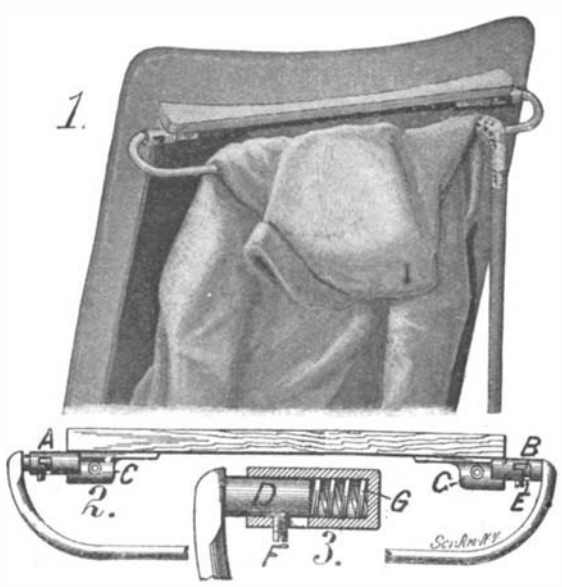

RACK FOR COATS, WRAPS, AND OTHER GARMENTS.

POWER TRANSMISSION MECHANISM.

The mechanism illustrated herewith is adapted to transmit power from one member to another at varying speed in either direction of rotation. In referring to the accompanying engraving, we will consider the shaft *A* as the driving member and the shaft *B* as the driven member, although it will be evident that their office may be reversed. Keyed to the shaft *A* is a friction wheel *C*, and mounted to rotate on the shaft *A* is a sleeve *D*, on which a second friction wheel *E* is carried. The wheel *E* turns with the sleeve, but is free to slide axially thereon. Power is transmitted from wheel *C* to wheel *E* through a pair of idlers *F*. The idlers, it will be observed, are provided with two friction surfaces, one for each friction wheel, and the surfaces which engage the wheel *E* are nearer the shaft *A*, so that if desired the wheel *E* may be driven at the same speed as wheel *C*. In order to hold the idlers in proper contact with the friction wheels, they are mounted on stub shafts fitted in roller bearings in casings *G*, and provided at their outer ends with pistons *H*. From the cylinder *J* oil under pressure is fed to the pistons *H*, to press the latter inward and bring the idlers *F* into frictional engagement with the wheels *C* and *E*. Some of this oil will leak past the pistons, and serve to lubricate the roller bearings of the idler shafts. The sleeve *D* terminates at one end in a casing *K* formed with an internal gear. The end of shaft *A* projects into this casing, and secured thereon is a pinion *L*. An extension of the shaft *B* also enters the casing *K*, and carries a series of pinions *M*, which mesh respectively with the internal gear of the casing *K* and the teeth of the pinion *L*. As the wheel *E* moves from the center of the idlers *F* toward the wheel *C*, its speed will vary from zero to that of the wheel *C*, and it will rotate in the same direction as this wheel. As the wheel *E* moves from the center of the idlers *F* in the opposite direction, its speed will vary similarly, but its direction of rotation will be reversed. This variation of speed between wheels *C* and *E* will be further modified by the planetary gearing just described in the casing *K*, and the shaft *B* will take the resultant of these motions. When it is desired to rotate the shafts *A* and *B* at the same speed, the oil pressure may be shut off, as it will be unnecessary to use the idlers *F*, and the shaft *B* may be coupled to the casing *K* by throwing in the clutch *N*. The inventor of this mechanism is Mr. Norman Ruland, of Rome, Italy (care of Thomas Cook & Co.).

While practically all the schemes of electrification so far discussed in Prussian railway circles have included only urban and suburban traffic, it is now intended to electrify two important trunk lines, viz., the Leipzig-Bitterfeld-Magdeburg, and the Leipzig-Halle railways. Extensive investigations as to the comparative economy of electric and steam operation are at present being made. The choice of these lines is dependent mainly upon the lignite beds situated between Halle and Leipzig. While the lignite is useless as a locomotive fuel, it will be employed advantageously for the boilers of the single power station, from which both lines will be operated. This station is located in the middle of the lignite fields. The aggregate length of the lines is 102 miles, the Leipzig-Magdeburg line being 80 miles, and the Leipzig-Halle 23 miles in length. The single-phase alternating current system is to be adopted, short trains being run in rapid succession. The potential of the current will be 10,000 volts.

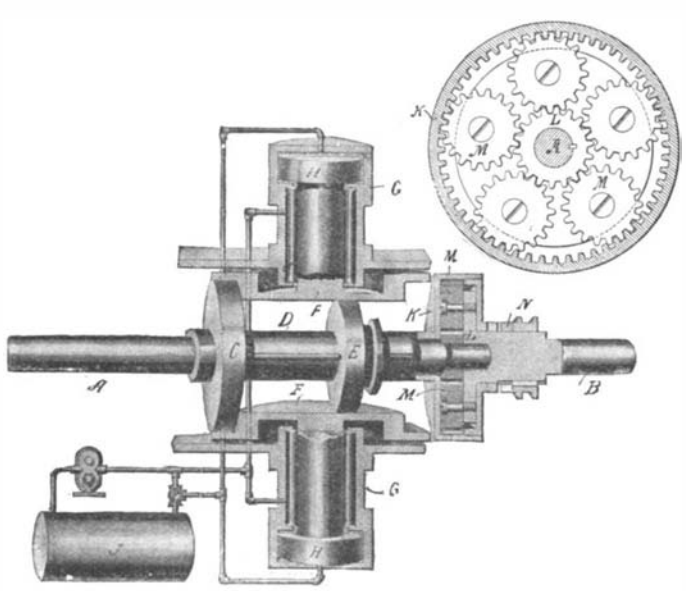

POWER TRANSMISSION MECHANISM.

TONGS WITH ADJUSTABLE JAWS.

The object of the invention herewith illustrated is to provide tongs that may be used in smaller spaces, and that will grasp and hold articles of greater dimen-

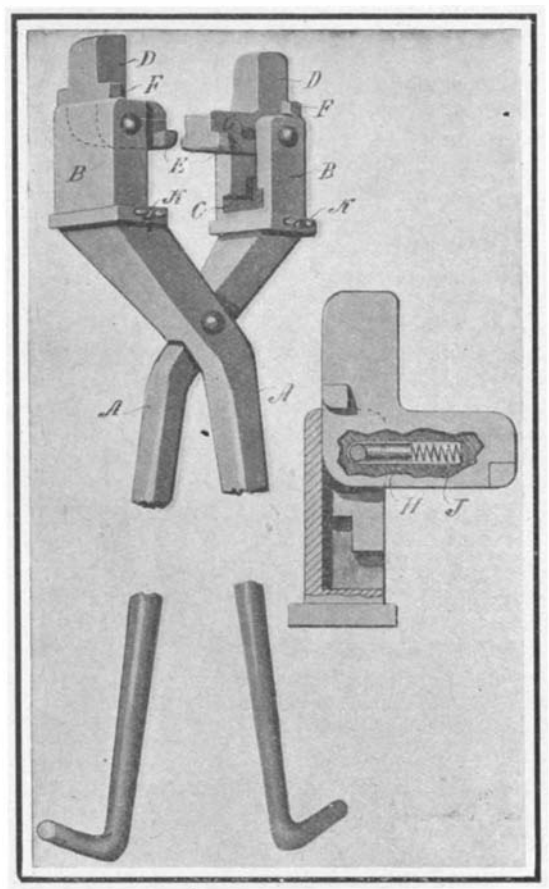

TONGS WITH ADJUSTABLE JAWS.

sions than is possible with tongs of like weight and of the usual design. The tongs comprise the ordinary handle members *A*, which are pivoted together and terminate beyond the pivot in bars *B*. These bars are recessed, as shown in the illustration, and the side faces of each recess are undercut, as indicated at *C*. Pivoted in the upper end of each bar is an L-shaped jaw *D*. These are provided at their inner ends with lugs *E*, which are adapted to enter the offset recesses *C* when the jaws are swung on their pivots. When the jaws are open, lugs *F* engage the outer ends of the bars *B*. The pivot pins which hold the jaws in the bars pass through slots *G* in these jaws. Bearing against each pivot pin is a small block *H*. The latter is kept in contact with the pivot pin by means of a spring *J*. In grasping an article with the jaws open as illustrated, contact is made with the transverse arms, causing the jaws to revolve about on their pivots, thus bringing the other arms of the jaws into active position. Now, on drawing on the article the springs *J* will be compressed, permitting the lugs *E* to engage the undercut parts *C* of the recess, thus locking the jaw against further pivotal movement. It will be evident that the tool in picking up an object may be used without separating the jaws to the extent required in the ordinary tongs, since the ends of the jaws as they revolve and engage the object are separated only the thickness of the object between the points engaged. Should it be desired to use the tongs in the ordinary manner, the arms are locked with the lugs engaging the undercut parts *C*, by means of bands which are carried on the bars. These bands are moved over the ends of the jaws, and secured wherever desired by means of thumb screws *K*. The inventor of these tongs is Mr. James Veno, of Vancouver, B. C., Canada.

RECENTLY PATENTED INVENTIONS.

Pertaining to Apparel.

DRAWERS.—M. GALLAND, Wilkes-Barre, Pa. The object in this case is to provide a woman's drawers, arranged to fit snugly at the waist of the wearer without giving undue fullness, and insuring a proper hang of the garment, at the same time presenting a skirt-like appearance and providing simple means for convenient attachment of catamenial sacks.

TAILOR'S PATTERN.—G. MADEO, New York, N. Y. This invention pertains to patterns such as used by tailors for cutting out garments. The object is to provide a pattern having a system of base lines corrected so as to adapt them especially to the degree of erectness of the model. The construction of the pattern is based upon the relation of certain dimensions taken on the model. A further object is to provide a pattern for laying out the sleeve of a garment, which improves the manner in which the finished sleeve hangs, and to improve the pattern of the collar.

Electrical Devices.

ELECTRIC HEATER.—H. WAHLQUIST, Philadelphia, Pa. The invention relates more particularly to those of a type suitable for heating liquids in small receptacles, such as tea-kettles, drinking cups and the like. The heat generated may be regulated to a great extent without affecting the electric current. It may be constructed to act as a sterilizer.

Of Interest to Farmers.

FRUIT-CUTTER.—H. ALL, Cutter R. R. Station, Cal. The invention is an improvement in cutters employed for gathering grapes or other fruit, and comprises a cutting blade and a handle secured thereto in such manner that it may be held in the same hand used to seize a bunch of grapes or other fruit, the use of both hands for gathering fruit being therefore unnecessary.

HOEING-MACHINE.—W. A. HARRIS, Greenville, S. C. The invention is especially designed for chopping cotton, and belongs to the class of such machines, illustrated in a former patent granted to Mr. Harris. The present invention relates to means for gaging and regulating the depths of the hoes, means for securing the regulation of the size of the stand left by the hoeing devices, means for shifting the carrier frame laterally along the drive shaft and other improvements.

Of General Interest.

ABDOMINAL SUPPORTER.—MARGARET DONALDSON, Oklahoma, Okl. One of the several purposes in this case is to provide a construction of a supporter that embodies an elastic belt and lapped bandages connected therewith, including shoulder straps and front and rear crossed sections, that invariably have a lifting tendency and at the same time exert backward pressure upon the safe section of the body above the hip bones and which in no instance exert downward pressure upon the body. It is intended also for use in kidney, obesity, and other troubles.

APPARATUS FOR ELEVATING GRAIN AND OTHER GRANULAR OR PULVERULENT MATERIALS.—L. G. ROHDE and H. J. ROHDE, 9 Rue Caumartin, Paris, France. Means are provided for regulating the admission of the material to be sucked in, consisting essentially in tubes provided with a series of orifices the area of which is adapted to be regulated by means of a sliding cover which can be displaced with regard to the orifices in such manner as to open or close completely or partially all the orifices together.

Hardware.

CLOSER FOR DOORS, SHUTTERS, GATES, AND THE LIKE.—C. TRUDE, St. Mary's, Kan. The inventor's aim is to provide a closer, which can be easily and rapidly mounted in position and by means of which the gate or door is automatically returned to the closed position after being opened. It operates firmly to close without slamming or jarring a door or gate.

SLIDING DOOR-FASTENER.—C. A. MOLINE, Bancroft, Iowa. The fastener is operated from the outside or inside. From the inside the handle is seized and the fastener rotated one quarter around whereby the plates are brought to vertical position, then the fastener is pulled toward the operator so that the outer plate is drawn back into a recess in the woodwork. It is requisite that the bolt connecting both plates should be adapted to slide and rotate in the recess, in order to engage it with or disengage it from the door, as required for fastening or releasing the same.

SAFETY ATTACHMENT FOR LINEMEN'S CLIMBERS.—J. D. O'CONNELL, 8 Margerey Street, Utica, N. Y. The object of the inventor is to provide a device for a climber that can be applied to any form thereof, and one that will eliminate most of the disadvantages of the safety belt and like appliances. He provides a device that will constitute a portion of the stirrup extension, this being always at hand and ready for use. It does not interfere with walking or climbing and will not strike the ground when walking.

NOTE.—Copies of any of these patents will be furnished by Munn & Co. for ten cents each. Please state the name of the patentee, title of the invention, and date of this paper.

INDEX OF INVENTIONS

For which Letters Patent of the United States were Issued for the Week Ending May 26, 1908.

AND EACH BEARING THAT DATE

[See note at end of list about copies of these patents.]

Acid, making methyithiophenol-ortho-carboxylic, Homolka & Welde 889,010
Acid menthol ester, brom-valeric, E. Sprongerts 888,857
Adding machine, F. Salinger 888,749
Advertising hat clasp, F. T. Sherwin 888,663
Aeroplane, F. I. Judson 888,618
Air brake, J. B. Wright 888,566, 888,567
Air brake, C. E. Shade 888,853
Air brakes, electrical appliance for controling, J. G. & W. H. Pearce 888,648
Air compressor, C. P. Tolman 888,553
Aluminium or other metals from their compounds, winning, H. S. Blackmore 889,098
Amalgamator, W. C. Bourdette 889,099
Anchor, ground, F. Lucas 888,917
Animal shears, W. M. Cahill 888,867
Armature winding for electrical machines, B. G. Lamme 888,514
Ash and match tray, combined, D. J. Segel 889,158
Automobile running gear, C. T. Pratt 888,737
Automobile sled attachment, H. H. Rohlf. 888,932
Automobile vehicles, drive and steering gear for, E. P. Cooper 888,589
Awning, M. Riley 889,049
Baby tender, R. L. Richardson 888,850
Bag fastener, Rohn & Sheldon 889,046
Bag holder, J. C. Jacoby 889,134
Baggage marker, E. S. Phillips 888,528
Bale tie, Alverson & Horsley 889,169
Bar counter box, Lehnbeuter & Brunnacker.. 889,140
Barium, manufacture of oxycarbid of, Battistoni & Rotelli 888,956
Basket cover making machine, R. B. Fuller 888,989
Basket covers, machine for making cleats for, R. B. Fuller 888,990
Battery. See Secondary battery.
Battery plate, storage, T. A. Willard 888,951
Bean puller, M. J. Quinsey 888,927
Bearing for driers and screens, end thrust, G. L. Preacher 889,043
Bearing, mining car wheel, Fownes & Gardner 888,700
Bearing, spindle, T. W. Morgan 888,633
Bed, sofa, F. Bennett 888,865
Bed spring end rail, G. Holden 889,007
Bedstead, A. Calvet 888,466
Bell mechanism, W. R. Moore 888,725
Bib, infant's, M. W. Walbridge 889,073
Binder, loose leaf, J. C. Dawson 888,788
Blower, positive pressure, J. W. Wilson ... 888,565
Boat, pleasure, D. G. Exley 888,983
Boilers, device for supplying scale removal compounds to, Case & Haggerty 888,469
Boot and shoe and innersole therefor, G. C. Bemis 889,093
Bottle, L. Liptai 888,829
Bottle cap closure, G. Koch 888,621
Bottle cap remover, G. A. Brinn 888,580
Bottle capper, cased, T. L. Valerius 888,770
Bottle capping machine, S. Wilkinson 888,772
Bottle filler, T. L. Valerius 888,769
Bottle filling machine, C. L. Bastian 888,577
Bottle, non-refillable, O. Hachman 888,891
Bottle, non-refillable, H. W. E. Josling 888,907
Bottle stopper, G. S. Griner 889,003
Bottle stopper, G. Kirkegaard 889,137
Bottle washing machine, W. J. Cunningham. 889,107
Box top, powder, W. H. Perkins 888,733
Brace and brace frame, flexible corrective, G. W. Haas 888,490
Brake shoe, F. W. Sargent 888,751
Bread maker's gage, J. Robesky 888,930
Brick conveyer, W. R. Martin 888,831
Bronzing machine, Friess & Weingartner 888,480
Brush, dabbing, P. Henry 888,804
Brush handle, R. Baillargeon 889,088
Brush holder, A. G. Howard 888,896
Bucket, well, L. B. Thomas 888,551
Buckle and thill carrier, combination, O. P. Welding 888,947
Building construction with reference to covering material, H. E. Kock 888,825
Building, wooden, J. H. Flickinger 888,603
Bundling press, Dexter & Cardell 889,112
Burial casket, C. L. Smith 888,664
Bushing, G. W. Spencer 889,055
Bushing, bung, T. Pendergast 888,922
Bushings, making, G. S. Van Voorhis 889,071
Butter cutter, C. P. Ross 888,746
Butter fat from fresh milk or cream, extracting, M. E. Stro 889,060
Button, cuff, H. C. Ward 888,860
Button fastener, T. R. Hyde, Jr. 889,133
Cabinet, W. Person 888,735
Cabinet, bin, C. F. Kurz 888,513
Cabinet, drawer, C. F. Kurz 888,512
Cabinet, kitchen, R. P. Dewey 888,966
Cable tension reel, J. A. Moser 888,639
Cables, connecting conductor for, F. S. Viele 888,674
Caisson, O. C. Edwards, Jr. 888,479
Calculating attachment, Dungan & Huckins. 888,598
Calipers and dividers, A. F. Henrikson 888,498
Can polishing machine, F. Kaeser 888,816
Cane, combination, W. T. Newsom 889,035
Car coupling, P. Neddo 889,033
Car derailer, R. Hamilton 888,892
Car door rail hanger, J. M. Hopkins 889,011
Car, dump, S. Otis 888,647
Car fender, J. A. Rogan 888,656
Car fender, automatic, H. W. Bodendieck ... 888,578
Car fender, street, Prater & Wilhelm 889,151
Car heating and ventilating apparatus, E. F. Porter 889,041
Car, railway dump, T. R. McKnight 888,526
Car, vestibule stock, W. A. Buckner 889,176
Car window, J. W. Scott 889,052
Cars, adjustable partition for stock, G. A. Peters 888,844
Cars at drawbridges, safety device for street, J. W. Collins 888,588
Carbid, manufacture of, H. L. Hartenstein. 889,124
Carbid manufacturing apparatus, H. L. Hartenstein 888,610
Carbureter, C. R. Greuter 888,487
Carbureter and governor for internal-combustion engines, combined, C. H. McClintock 889,032
Carbureter for explosive motors, automatic, L. M. G. Delaunay-Belleville 888,965
Carpenter's tool, T. Buehler 889,104
Carpet fastener, stair, J. L. Kingston 888,713
Carpet stretcher, T. K. Bradbury 888,689
Carpet sweepers, disinfecting attachment for, W. L. Plumb 888,529
Carrier. See Feed and litter carrier.
Carving machine, F. H. Richards 888,534
Cash slip, refunding, B. F. Seymour, Jr. ... 888,938
Casket handle, N. L. Barmore 888,776
Cesspool, G. W. Schodde 889,051
Chain, H. S. Atkinson 889,170
Chimney cowl, D. McLean 888,728
Churn and freezer, R. C. Lamb 888,623
Chute and draft appliance, straw, F. A. Magwire 889,027
Chute, coal, F. Leschinski 889,023
Cigar, I. Kitsee 888,508
Circuit breaker, E. H. Smythe 888,760
Circulation, F. P. Dewey 888,968
Circulation apparatus, F. P. Dewey 888,967
Clamp, J. H. Mills 888,834
Clamp anchor, F. Robinson 888,831
Clock repeating mechanism, Muller & Kramer 888,836
Clod crusher, E. C. Bandle 889,090
Cloth cutting machine, G. Scott 888,755
Clothes hanger, C. Cook 888,697
Clothes press or cabinet, N. Burns 888,463
Clutch, friction, S. Bramley-Moore 888,523
Clutch, friction, J. Fuchs 888,703
Cobalt and nickel, separating salts of, T. B. McGhie 888,839
Cock, gas, Holderness & Evans 888,501
Cock, safety gas, F. T. Richter 888,742
Code message, M. Berardini 888,094, 888,095
Coin controlled apparatus, M. Elzas 888,600
Coin controlled lock, V. A. Lippert 888,828
Colander, A. Kissel 888,620
Collapsible box, W. I. Tuttle 888,554
Collapsible box, N. B. Wood 888,774
Collapsible box, W. I. Tuttle 888,943
Computing machine, Uebbing & Marshall ... 888,555
Concrete construction, reinforced, R. H. Aiken 889,083
Concrete floor and ceiling, reinforced, G. M. Graham 888,999
Concrete floor construction, F. C. Taxis 888,671
Concrete mixing apparatus, C. B. Dunn 888,975
Concrete roof, reinforced, G. M. Graham ... 889,000
Condensing plant, steam, D. B. Morison 888,637
Container, F. B. Davidson 889,109
Control apparatus, automatic, J. B. H. Clologe 888,961
Controlling and reversing means, C. F. Roper 888,744
Convertible chair, G. E. Clapp 888,868
Conveyer, chain, J. Mallon 888,918
Cord grip for mechanical or other fixtures, J. E. R. Hayes 888,893
Cores, chaplet for, Frese & Rauch 889,115
Corking machine, C. Sellenscheidt 888,538
Corn and other grain, degerming Indian, J. F. Gent 889,116
Corn mill, W. C. & F. D. Meadows 888,631
Counter, R. W. & C. B. Vardeman 888,944
Counting register, H. C. Bowlus 888,781
Cradle, W. W. Temples 889,065
Cranes, automatic safety device for, N. S. Haseltine 889,126
Crate filler machine, egg, L. J. Smith 888,543
Cream separators, driving mechanism for centrifugal, T. W. Morgan 888,634
Cuff for coats, detachable, L. Shulman 888,757
Culinary supply card, W. D. Henderson 888,708
Cultivator shovel fastening, R. L. Morris ... 888,635
Curling or crimping tongs, V. Wex 888,861
Cutter bar and guard, C. G. Hampton 888,491
Cyanids, making, H. S. Blackmore .. 889,096, 889,097
Darning device, G. H. Crawford 888,592
Decorticator, W. L. Weber 889,161
Dental cement and manufacturing the same, F. L. & G. L. Grier 889,002
Dental plugger, Atkiss & Carson 888,455
Dental swaging apparatus, H. W. Allwine .. 889,085
Desk implement, combination, J. S. Rapson. 888,848
Desk, table, W. C. Miles 888,722
Dish drainer, D. P. Zondervan 888,953
Display stand, O. P. Lively 888,716
Distilling apparatus, P. Asher 889,087
Distilling apparatus, T. M. U. von Post 889,150
Door closing apparatus, automatic, Zopfchen & Dusel 889,168
Door fastener, Hughes & Pfeifer 888,614
Door hanger, N. D. Wells 889,076
Door hanger tracks, means for supporting, J. M. Hopkins 889,012
Doubling machine, G. A. Wettengel 888,771
Draft equalizer, J. O. Helgeson 889,006
Drafting instrument, V. Higgins, et al 888,709
Drag and harrow, road, H. D. Guffey 888,609
Drawing board, W. F. Wagner 889,072
Drawing press, L. C. Sharp 889,155
Drier, P. W. Holstein 889,009
Drum muffler, snare, G. A. Smith 889,053
Dye, brown vat, Schirmacher & Brunner 888,852
Dye, direct cotton, J. Turner 888,942
Dye lakes, making red azo, Ernst & Pretzell 888,981
Dye, red azo, Muller & Otto 888,837
Dye, red tetrazo, E. Meyer 888,522
Dye, red tetrazo, Jedlicka & Schedler 889,016
Electric furnace, L. Dion 888,877
Electric heater, E. F. Porter 889,040
Electric machine, dynamo, J. M. Barr 888,456
Electric machine, dynamo, Tingley & Ray. 888,940
Electrical apparatus, R. P. Jackson 888,901
Electrical control system, H. L. Van Valkenburg 888,557
Electrical generators, method of operating and system of control for, B. G. Lamme 888,912
Electrical separation of paaticles from a fluid stream, apparatus for, L. N. Morscher .. 888,638
Electroplating holder, W. Y. Buck 889,103
Elevator stopping mechanism, plunger, T. Larsson 888,515
Engine. See Rotary engine.
Engine starting means, gas, D. Fergusson .. 888,794
Engines, apparatus for cooling cylinders of gas, A. Knox 888,909
Engines, igniter rod for gasolene, R. J. Rennie 888,533
Engines, sparking circuit controller for explosion, W. E. Dow 888,597
Envelop opener, H. F. Hansen 889,004
Extracts containing tannin, decolorization of, Stiegelmann & Dehnel 889,059
Eye shade, Wade & Montgomery 888,945
Eyeglass cases, machine for covering, W. P. Devine 889,111
Fabrics, producing impressions fast to water on textile, L. Lilienfeld 888,516
Fan or pump, centrifugal, S. C. Davidson, reissue ..... 12,796 to 12,798
Fan, rotary, Barth & Sauter 888,575
Fan wheel and casing, W. W. Green 889,001
Feed and litter carrier, H. L. Ferris 888,878
Feeder, W. P. Jencks 888,811
Feeder, variable standard boiler, E. P. Noyes 888,840
Felly, T. H. Walbridge 888,558
Fence, J. F. Johnson 888,905
Fence machine, wire, C. K. Chapin 888,784
Fence post, C. A. Mendenhall 888,719
Fence stretcher, wire, E. E. Whitehead ... 888,561
File, stick, C. B. Cook 888,472
Filing device, N. H. Fulton 888,879
Filing machine, C. J. Peterson 888,651
Filling machine, automatic, J. N. Humphreys 888,615
Filter, J. T. H. Paul 888,731
Filter and regulating tap, combined water, G. Kindermann 888,712
Filtering and decanting apparatus, W. A. Hendryx 889,131
Finger shield, H. H. Fulton 888,991
Fire door, vertical folding, R. W. Hare 889,005
Firearm, J. C. White 888,560
Fireproof door, P. J. Anquist 888,863
Flat iron and conductor, electric, P. E. Oswald 888,843
Fluid or water jacket connection, F. W. Schroeder 888,658
Fluid pressure regulator, E. P. Noyes 889,185
Flying machine, F. R. Sweeny 889,062
Folding chair, E. T. Morris 888,726
Footwear, A. W. Biddle 888,458
Form, dress, L. T. Furnas 888,992
Formic-aldehyde preparation and making same, H. S. Blackmore 889,171
Fruit picker, H. J. Bolinski 888,459
Furnace, J. J. Jones 888,815
Furnace charging apparatus, blast, D. I. Miller 888,723
Furnaces, boilers, ranges, etc., portable fire box partition for, M. D. Mason 888,630
Furnaces, dog house for open hearth, A. Cruickshank 888,962
Furnaces, stoking, C. W. Crosby 888,787
Furniture, W. Person 888,734
Galley lock, A. S. Orchard 889,036
Game, F. M. Greer 888,883
Game apparatus, Sears & Boesche 888,660
Game apparatus, A. N. Thomas 889,066
Garment fastener, J. Forman 888,987
Garment supporter, J. M. Taylor 888,550
Garment supporter, C. J. Daniel 889,108
Gas burner cleaner, acetylene, D. Barnard .. 888,777
Gas heating apparatus, Steele & Willy 888,547
Gas jet heater, J. W. Allen 888,954
Gas producer, J. Bowey, Jr. 888,780
Gas producers, operating, E. P. Coleman .. 888,785
Gas producing apparatus, suction, H. H. Ralph 888,532
Gas retort collar, W. G. Laird 888,622
Gases, manufacturing combustible, E. N. Dickerson 888,969
Gases, preparing solutions of, H. Howard .. 889,132
Gasolene tank, J. C. Gurley 888,488
Gate, G. F. Seiser 888,537
Gear connection, R. Braun 889,101
Gear truing machines, grinding wheel trimming mechanism for, Ward & Taylor ... 888,675
Gearing, J. G. Kelly 888,619
Gearing, A. F. Rockwell 889,152
Gearing, speed changing and reversing, W. A. Salter 888,750
Glove protector, Hall & Hostachy 888,800
Goggles for horses, M. M. Boggs 888,687
Governor attachment, C. R. Welch 888,946
Governor for gas engines, electrical, J. D. Anderson 889,086
Governor, speed, Snyder & Hume 888,761
Grading machine, A. W. Snow 888,665
Grain treating apparatus, W. F. Carlton ... 888,467
Graining material, A. Sutton 888,859
Grinding locomotive frames, machine for, A. Forsyth 888,604
Grinding machine feeding mechanism, J. N. Heald 888,496
Grindstone attachment, J. M. Drake 888,971
Guano distributer, G. H. Jernigan 888,812
Gun, quick firing, H. Otto 889,037
Gutter, G. W. Schodde 888,753
Harrow riding attachment, W. E. Johnson. 888,813
Harrow truck, disk, F. N. Steele 889,057
Hat holder, lady's, H. M. Garratt 888,880
Hat band, ventilating, Jaillet & Tussau 888,902
Hay loader, A. Otto, Jr. 888,527
Hay rake, side delivery, H. B. Sperry 888,546
Headlight, adjustable, I. D. McMannamy .. 888,641
Heater. See Electric heater.
Heating apparatus, electrical, R. G. Pheysey 888,923
Heating system, H. L. Winslow 888,773
Hides, skins, etc., machine for dressing, J. W. O'Donnell 889,146
Hinge, J. A. Raith 888,531
Hinge, window blind, B. E. Byrd 889,178
Hoist, J. E. Hovendick 888,612
Hoisting apparatus, E. A. Collin 888,695
Hook and eye, J. Dugas 888,973
Horse detacher, J. D. Lindsley 888,625
Hose, E. J. Coughlin 888,590
Hose reel, bracket, L. W. Parker 889,038
Hydrant, G. H. Traxel 888,941
Hydraulic motor, R. Davis 888,698
Ice from power streams, apparatus for deflecting frazil and anchor, F. C. Pierce 888,924
Illuminating device, A. W. Beuttell, reissue 12,795
Inhaler, F. I. Clark 888,869
Instep support or arch, J. Sandler 888,936
Insulator, C. C. Johnson 888,616
Internal combustion and other fluid pressure engines, Roberts & James 889,044
Iron, manufacturing, H. L. Hartenstein 889,125
Ironing gloss, G. Reichert 888,655
Jars, bottles, and like receptacles, closure for, M. D. Converse 888,696
Jars, bottles, and the like, closure for, J. Karrmann 888,818
Jeweler's loop, M. R. Johnson 888,617
Kettle, F. N. Martindale 888,519
Kettle protector, H. T. Kellogg 889,020
Kiln, M. H. Avram 888,573
Knitting machine stop motion, A. L. Brumbach 888,461
Labeling machine, bottle, G. A. Hoffman .. 888,894
Lace retaining device, J. A. Elphinstone ... 888,978
Lacing holder for wearing apparel, F. B. Almy 888,454
Lamp, R. E. Bruckner 888,691
Lamp, arc, W. S. Weedon 889,162
Lamp, electric arc, W. S. Weedon 889,163
Lamp, miner's, W. Tunnessen 888,768
Lamp shade attachment, electric incandescent, A. F. W. Meyer 888,521
Lamp, vapor, W. T. Wood 888,679
Lard compounding machines, cooling device for, R. L. Wright 888,680
Last manufacturing machine, W. E. Trufant 888,672
Lathing, composite, F. Wolf 889,167
Legging, M. Rosenwasser 888,745
Linotype machine, H. Petersen 888,649, 888,650
Linotype machine, F. B. Converse 888,786
Linotype slug trimmer, G. E. Wallin 889,074
Liquid drawing apparatus, Harrington & Leonard 888,493
Liquid meter, R. Fritsch 888,481
Liquid treating apparatus, W. A. Hendryx 889,130
Lixiviating apparatus, C. E. Arnold 888,685
Lixiviating apparatus, E. N. Trump 889,159
Loading machine, P. S. Severin 888,661
Lock, S. Drew 888,478
Locking device, J. A. Lamont 889,138
Locomotive crane, V. R. & E. H. Browning, 888,690, 889,174
Log camp, W. Z. Wilkinson 888,564
Log loading machine, Buckley & Huggins .. 888,583
Loom stop motion, B. Forster 888,796
Loom, swivel, A. Lang 888,715
Loose materials, apparatus for handling, G. W. Jackson 888,900
Lubricator, W. W. McCarty 888,525
Mail bag catcher and deliverer, H. E. Messersmith 889,030
Mail bag deliverer, O. C. Brett 889,172
Mail bag deliverer, double, A. A., Jr., & D. F. Douglass 888,970
Mail bag delivery apparatus, A. F. Markwell 888,518
Mail catcher and deliverer, S. T. Long 888,718
Mail catching and delivering apparatus, O. C. Harden 889,123
Mail crane, S. T. Long 888,717
Mail marking machine, F. C. Ielfield 888,809
Mail pouch receiver, H. Clay 889,105
Mail pouches on railway mail cars, apparatus for catching and delivering, M. E. Allen 889,084
Manure loader, C. O. Linn 889,916
Manure spreader, Rude & Smith 888,747
Marble slabs or the like, cut-off machine for, J. R. Peirce 888,732
Match receptacle, Bull & Blom-Ohlsen 888,462
Measuring light, W. J. Hammer 888,802
Measuring light, apparatus for, W. J. Hammer 888,801
Measuring machine, W. T. Hollis 889,008
Mechanical drier, W. M. Cummer ... 888,474, 888,475
Medical appliance, S. Rolfson-Schmidt 889,154
Medicinal composition, making a, J. C. Slack 888,758
Mercury vapor apparatus, P. H. Thomas 889,067
Metal bound box, E. E. Flora, reissue 12,800
Metallic hoop, J. W. Brainard 889,100
Meter, E. Ek 888,599
Meter regulator, T. B. Wylie 888,952
Mill, G. A. Browne 888,465
Mining machine, Palmros & Hopkins 889,149
Mining machine, D. N. Osyor 889,148
Miter box, G. Magrath 889,026
Mixing machinery, H. Skinner 888,542
Molding machine, W. W. Doolittle .. 888,595, 888,596
Motor control system, electric, H. D. James, 888,903, 888,904
Motor starter, automatic, E. H. Smythe 888,759
Mouth prop, J. L. Gehorsam 888,484
Muffler, C. J. Gustafson 888,489
Music holder and leaf turner, A. E. Kerfoot 889,021
Music leaf turner, C. Hughes 888,897
Music playing instrument, autopneumatic, F. C. White 888,559
Musical instrument, mechanical, C. Maerten, Jr. 888,830
Musical instrument, mechanical, P. J. Meahl 889,029
Musical instrument, stringed, H. L. Suter .. 888,939
Musical instruments, differential valve for pneumatically controlled, P. Welin 889,165
Musical instruments, note sheet feed mechanism for, W. E. Cleveland 888,587
Necktie knot, A. Swanson 888,549
Needle threader, S. C. Early 888,977
Nut, check, C. H. Chapman 888,694
Nut lock, R. K. Gregory 888,486
Nut lock, H. G. Frew 888,797
Nutcracker, F. E. Proctor 888,738
Oar, pivoted, Merriman & Apfel 888,520
Oil burner, R. C. Nelson 888,644
Oil tank, non-explosive, F. W. Reiber 888,739
Ore, jigging machinery for dressing, G. J. Dawbarn 888,964
Ore sampler, C. L. Constant 888,471
Ore treating apparatus, W. A. Hendryx 889,128
Ores, treating, W. A. Hendryx 889,129
Packing box, safety, P. J. Sisco 888,855
Packing, journal bearing, A. R. Scott 888,937
Packing table, L. Abraham 888,681
Padlock, combination, E. E. Sutton 889,061
Padlock, keyless combination, B. Kreuzberger 888,910
Paint machine, V. Aranguren y Bustinza 888,693



FOR FOOT OR POWER

the celebrated screw-cutting "STAR" LATHES hold undisputed supremacy throughout the world. For fine and accurate work they are unapproachable. The best materials and workmanship only. Economy in manufacturing makes prices moderate. Write for free catalog.

THE SENECA FALLS MFG. CO.
695 Water St., Seneca Falls, N. Y.

Engine and Foot Lathes

MACHINE SHOP OUTFITS. TOOLS AND SUPPLIES. BEST MATERIALS. BEST WORKMANSHIP. CATALOGUE FREE

SEBASTIAN LATHE CO., 120 Culvert St., Cincinnati, O.



THE CLIPPER CLIP

Its triangular shape prevents entangling and gives three times the capacity of any other Clip for attaching papers together.
Best & Cheapest. All Stationers.

CLIPPER MFG. CO.,
New York City

Send 10c. for sample box of 100; or 20c. for clips and desk tray.

Special High Grade 2 Cycle 2 H. P. Marine Engine $43

With complete outfit ready to install in your Launch, Rowboat or Canoe. Larger sizes at proportionately low prices. Prompt delivery and satisfaction guaranteed. Catalog FREE.

THE INVINCIBLE MOTOR CO.
162 Washington Street, Chicago, Ill.

FRICTION DISK DRILL

FOR LIGHT WORK.
Has These Great Advantages:

The speed can be instantly changed from 0 to 1600 without stopping or shifting belts. Power applied can be graduated to drive, with equal safety, the smallest or largest drills within its range—a wonderful economy in time and great saving in drill breakage. Send for Drill Catalogue.

W. F. & JNO. BARNES CO.,
Established 1872.
1999 Ruby Street, - - Rockford, Ill.



Palmer Motors

Two and Four Cycle. One, Two and Four Cylinder. Stationary and Marine. One to Twenty H. P. Catalogue FREE.

PALMER BROS., Cos Cob, Conn.
New York: 30 East 20th Street
Philadelphia: The Bourse
Boston: 85 Union Street
Portland, Me.: Portland Pier
Seattle, Wash.: Colman Dock

WELL DRILLING Machines

Over 70 sizes and styles, for drilling either deep or shallow wells in any kind of soil or rock. Mounted on wheels or on sills. With engines or horse powers. Strong, simple and durable. Any mechanic can operate them easily. Send for catalog.

WILLIAMS BROS., Ithaca, N. Y.



Would You "Make the Round Trip" Without Uncertainty?

Investigate the

Hildreth Marine Motors

We are ready to

"SHOW YOU"

Send for valuable facts about Marine Motors.

THE HILDRETH MFG. CO.
703 Sheridan, Lansing, Mich., U.S.A



JAGER Marine 4-Cycle Engines

Skillfully designed and well built. Single lever control, combining automatic carburettor with spark advance. Develops wide speed range and reliability under most trying conditions. Sizes 3 to 60 h. p. Send for catalog.

CHAS. J. JAGER CO.
281 Franklin, cor. Batterymarch St.
Boston, Mass.

$40 MOTORCYCLE



We have the largest line of New and used Motor Cycles, Parts and Supplies in the country, at the lowest prices. Every machine guaranteed. We are the largest and only exclusive Motorcycle House in the world. Send for our 1908 Catalog. Repairs a specialty.

Motors and Castings for Air Ships

Harry R. Geer Co., B51 McLaran Ave., St. Louis, Mo.

THE BARKER MOTOR

has from the first shown itself to be of superior design. Mechanical ideas of proven worth, combined with the best materials and careful attention to details make it

THE LEADER OF ITS CLASS.

C. L. BARKER, NORWALK, CONN.

How to Build a 5 H. P. Gas Engine at Home

In SCIENTIFIC AMERICAN SUPPLEMENTS 1641 and 1642, E. F. Lake describes simply and thoroughly how a five horse power gas engine can be built at home. Complete working drawings are published, with exact dimensions of each part. Price by mail for the two Supplements, 20 cents.

Order from your newsdealer or from

MUNN & COMPANY
Publishers
361 Broadway, New York

Paper, manufacture of, H. Gaara	888,482
Paper pail, B. I. Rike	889,048
Paper treating tank, A. C. Rice	888,741
Parachute arrow, C. R. Stewart	888,668
Paste box and dauber, E. M. Scranton	888,756
Pavement and making the same, W. S. Houghton	888,886
Pavement or roadway and making the same, W. S. Houghton	888,887
Paving blocks or bricks, means for handling, J. Sheridan	888,662
Pen, fountain, W. F. Barrett	888,955
Pencil carrier, G. A. Oberg	888,842
Pencil sharpener, C. C. Spengler	889,056
Pencil sharpener, S. B. Jones	889,135
Pencil sharpener, R. V. Collins	889,179
Pencil sharpener attachment, J. C. St. John	888,669
Perch, fowl, A. Peris	889,039
Phonographs, graphophones, and the like, apparatus for manufacturing cylindrical records and blanks for, J. Ames, et al.	888,682
Photograph cabinet, F. J. Busald	888,958
Photographic print apparatus, W. E. Sinclair	888,540
Photographic printing machine pad, J. C. Calhoun	888,585
Physician's case, P. Ruehlmann	889,156
Piano bench, H. L. Schuff	888,754
Picture hook, A. H. Kemper	888,819
Picture moldings, auxiliary holding strip of metal for, G. F. Drew	888,972
Piling, metal sheet, G. W. Jackson	888,899
Pipe bending machine, C. B. Morton	888,727
Pipe cleaner, smoking, W. H. Boughton	888,688
Pipe closure, A. Andrews	888,683
Pipe coupling, C. F. Dotts, et al	889,113
Pipe cutter, trench, J. E. Moore	888,724
Pipe elbows, making corrugated sheet metal, F. Brune	889,173
Pipe hanger, train, J. F. Drake	888,791
Pipe lifter, M. E. Layne	889,139
Pipe molding machine, Murray & Babbitt	888,921
Pipe or hose coupling, J. H. Phillips, Jr.	888,846
Pipes or tubes, apparatus for rilling, C. Fell	888,984
Planer driving mechanism, B. D. Stevens	888,765
Planter attachment, G. Weidinger	888,676
Planter attachment, seed, G. W. & H. Sterken	888,764
Pliers, E. A. Gemeny	888,606
Plow, motor, P. H. Munroe	889,143
Plow point, C. G. Gertz	888,607
Polishing, process of, A. Giese	889,117
Post mold, H. Ballinger	889,091
Power transmitting means, R. S. Prindle	888,654
Press for the manufacture of articles from granular or fibrous material, Wurl & von Mattencloit	889,081
Printing for embossing, scoring, and die cutting, securing absolute registration in, F. J. Holmes	888,895
Printing machine, bag, C. E. Dulin	888,974
Propelling apparatus, boat, J. E. Carroll	888,586
Pruning instrument, S. P. Hayward	888,495
Pulley construction, sheet metal, F. Philips	888,845
Pulley, gripping, Frost & Reese	888,702
Pulley, sling, J. M. Boyd	888,866
Pump, J. W. Bagby	888,574
Pump, air, S. E. Spencer	888,762
Pump, centrifugal, E. F. Welch	889,164
Pump, rotary, R. Berrenberg	888,779
Pump, rotary, J. Muller	888,838
Pumps, lining for casings of rotary, A. W. Jones	888,814
Pumps, spring pressure regulator for, L. W. Haskell, et al	888,803
Punch, hand, H. E. Walter	889,075
Putty applying tool, T. J. MacLaughlin	888,629
Pyrographic or cautery device, T. W. Miller	888,833
Rail bending device, V. Pilia	888,847
Rail bond, A. H. Englund	888,980
Rail joint, F. Neralic	889,034
Railway cross tie, G. R. Mavis	889,028
Railway gate, A. Wyper	888,568
Railway, pleasure, E. G. Geores	888,881
Railway rail, J. Francis	888,988
Railway rail tie, concrete, C. L. Ruse	888,851
Railway signal, E. M. Cain	888,959
Railway signal, A. W. Harvey	889,127
Railway signal, S. M. Ward, Jr.	889,160
Railway signal system, E. E. Gabbart	888,483
Railway signaling system, electric, E. B. Howell	888,613
Railway switching device, automatic electric, Rice & Hill	888,929
Railway tie, J. H. Norton	888,729
Railway tie, Ream & Boyd	888,928
Railway tie and fastener for securing the rails thereto, metallic, C. E. Powell	888,926
Railway tie and rail fastener, [illegible] J. F. Stoner	888,670
Rake. See Hay rake.	
Razor guard, E. B. Gibford	889,183
Receptacle, collapsible, H. J. Potter	888,653
Register, H. W. Sayles	888,752
Registering apparatus, P. Winsor	889,079
Registering mechanism, F. P. Stevens	888,667
Rein support, T. C. Thompson	[illegible]
Renovator, J. H. Green	889,121
Rheostat, S. A. Leonard	[illegible]
Rifle sight, M. E. Sutherland	888,858
Road and making same, B. N. Beard	888,864
Roasting and smelting furnace, J. J. Brown, Jr.	888,582
Rock drill, J. S. Harlow	888,492
Rock drill, turbine driven, M. Kellow	888,506
Rock drilling machine or engine, Hellman & Bayles	888,497
Roller mill, E. Brown	888,581
Rotary engine, A. Hopkins	888,806
Rotary engine, J. C. Barnes	889,092
Rotary furnace applicable for use in roasting ores or the like, W. Hommel	888,502
Rubber extracting machine, S. Kirk	888,714
Salt cellar, P. A. Peterson	888,652
Sash lock, O. E. Lamberson	888,911
Sashes, machine for making and driving tacks in window, C. E. Johnson	888,505
Sashes, window screens, etc., fastener for storm, M. Hauser	888,494
Sausage stuffing machine, E. J. Hallahan	888,122
Saw guard, circular, R. W. Hood	888,805
Saw jointer, set, swage, and gage, combined, H. L. Trueblood	889,070
Saw recutting mechanism, J. C. Gebhart	888,704
Saw set, W. J. Boynton	888,579
Saw swaging machine, J. C. Fox	888,701
Scale, automatic weighing, F. C. Osborn	888,646
Scaling machine, Burri & Donnelly	888,464
Scourer, shaking, S. T. Wilson	888,678
Scraper, J. B. Ackermann	888,775
Scraper for grain drills or other vehicles, wheel, J. Murr	888,524
Seal impressing or printing machine, F. Gottschalk	888,889
Seals on papers, device for impressing, F. Gottschalk	888,890, 888,997
Sealing cap, bottle, E. J. Godman	888,995
Sealing machine, envelop, T. F. Bowes	888,466
Seat supporting device, W. S. Grey	888,799
Secondary battery, R. J. Fleischer	888,602
Seed drill feed cup, F. Dahlund	888,963
Self-setting trap, I. L. Kindig	888,820
Sewing machine bobbin carrier, P. Anschutz	888,684
Sewing machine feed mechanism, C. F. & M. T. Goforth	889,119
Sewing machine folding and taping guide, W. L. Swift	889,063
Sewing machine stopping gear, J. Beattie	888,957
Sewing machine table, E. C. Saettler	889,050
Sewing machine tension, C. F. & M. T. Goforth	889,118
Shafts, means for lubricating rapidly revolving vertical, I. P. B. Knudsen	888,824
Shafts, rotating means for reciprocating, J. P. Karns	889,136
Sharpening machine, saw, R. F. Daniels	889,180
Shearing, cutter for sheep, S. L. Johnson	889,017
Shipping case, knockdown, Stiles & Benson	888,548
Shock loading machine, Smith & Walker	889,054
Shoe, J. F. Davis	888,476
Shoe, E. Kelly	888,908
Shoe, W. E. Gilman	888,994
Shoe, sporting, T. Corcoran	888,473
Shovel, etc., handle, F. Skelton	888,541
Shutter fasteners, sill plate for, H. Zimmerman	888,570
Shutter or blind operating device, D. Drawbaugh	888,792
Shutter, rolling, J. G. Wilson	888,862
Sifting apparatus, ash, J. L. Laverty	888,827
Sign apparatus, barber's, P. Zarella	888,569

"My Policies"

WILL KEEP THE WOLF FROM THE DOOR IF THEY ARE IN

The Prudential

INSURANCE CO. OF AMERICA
Incorporated as a Stock Company by the State of New Jersey
JOHN F. DRYDEN, President
HOME OFFICE, NEWARK, N. J.
Send for Rates of NEW LOW Cost Policy. Dept. 121

Engineering News
(ILLUSTRATED)
214 Broadway, New York

The leading weekly Engineering paper of the world, devoted to the interests of Civil, Mechanical, Mining, and Electrical Engineers. 100 to 125 pages weekly. Send for free sample copy.

MEDAL OF HIGHEST AWARD
JAMESTOWN EXPOSITION

Add TONE to your Stationery in the OFFICE, BANK, SCHOOL or HOME by using only Wasbburne's Pat.
"O.K." PAPER FASTENERS
There is genuine pleasure in their use as well as Perfect Security. Easily put on or taken off with the thumb and finger. Can be used repeatedly and *"they always work."* Made of brass, 3 sizes, in brass of 100 fasteners each. Send 10c for sample box of 50, assorted. Booklet free.
THE O.K. MFG. CO. Dept. X Syracuse, N.Y. N9 1B



Racine Power Hack Saw

will cut 6-inch round steel bar in 78 minutes. Second cut in 81 minutes. Will cut at least six cuts with one blade. How long will it take your machine to make a 6-inch cut? Our machine will save its cost in a short time by saving time, material and blades. Ask your machinery dealer for prices and particulars. It will surprise you, or write our Department No. 8.

RACINE GAS ENGINE CO.
Racine, Wis.

MILLS FOR ALL MATERIALS.



OUR BUSINESS IS TO MAKE MACHINERY FOR GRINDING GRAIN, CRUSHING ROCKS AND PULVERIZING ALL HARD SUBSTANCES. WE HANDLE ALL KINDS OF MATERIALS FROM COTTON-SEED TO ROOTS AND HERBS, BY AN UNEXCELLED PROCESS. IF YOU WANT ANY KIND OF A MILL OR GRINDING MACHINE, COME TO US AND YOU WILL GET THE BEST AND STILL SAVE MONEY.
DEAL WITH US ONCE AND YOU WONT CHANGE.
ESTIMATES FREELY FURNISHED.
SPROUT, WALDRON & CO.
SEND FOR CATALOG No 4.) MUNCY, PA.

National

"THE ALL-BALL-BEARING CAR."

The New 1908 National Models in
TOURING CARS, ROADSTERS AND LIMOUSINES

are similar in general design to their predecessors, improved and refined in all details. By adhering to the one general type of construction, we have developed a **quiet, easy-riding, accessible, simply constructed machine,** which meets every requirement of the experienced purchaser. The **National** has a **ball-bearing motor, aluminum body, two complete ignition systems, perfect spring suspension, flexible control, and an abundance of power.**

Model K—4 cyl., 4¾x5. Model R—6 cyl., 4½x4¾.
Model N—4 cyl., 5x5. Model T—6 cyl., 5x5.

Write for particulars and our booklet, "What Owners Say About Their Nationals."

National Motor Vehicle Co., 1019 E. 22nd St., Indianapolis, Ind.

THE "BEST" LIGHT

is a portable 100 candle power light costing only two cents per week. Makes and burns its own gas. Brighter than electricity or acetylene and cheaper than kerosene. **No Dirt. No Grease. No Odor.** Over 100 styles. Lighted instantly with a match. Every lamp warranted. **Agents Wanted Everywhere.**

THE "BEST" LIGHT CO.
87 E. 5th St., Canton, O.
Owners of Original Patents.

Science for the Evenings

The Heavens Without a Telescope

A MOVING PICTURE OF THE UNIVERSE

The Only Combination Sun, Moon, Star and Planet Map

Every Stellar body accurately placed for any date for the next twenty years, in the Northern Hemisphere. Indorsed by leading scientists. Requires no technical knowledge to use it. Complete mastery of the heavenly bodies in a few hours.

Most graphic way of interesting all in the wonderful planetary system of the Universe. Chart is 15 inches square, with revolving disk map showing all stars. Made of heavy cardboard

Special Offer. For a limited time only, we offer our readers this splendid Planisphere at a special reduced price of $3.00, postpaid. Send for descriptive circular.

MUNN & COMPANY, 361 Broadway, New York

Classified Advertisements

Advertising in this column is 75 cents a line. No less than four nor more than ten lines accepted. Count seven words to the line. All orders must be accompanied by a remittance. Further information sent on request.

READ THIS COLUMN CAREFULLY.—You will find inquiries for certain classes of articles numbered in consecutive order. If you manufacture these goods write us at once and we will send you the name and address of the party desiring the information. There is no charge for this service. **In every case it is necessary to give the number of the inquiry.** Where manufacturers do not respond promptly the inquiry may be repeated.

MUNN & CO.

BUSINESS OPPORTUNITIES.

GENTLEMAN, now here from Europe, who very successfully has introduced American goods in the European market, wants the European representation for one or a few large firms; specialty preferred. For particulars address S. D., Box 773, New York.

Inquiry No. 8594.—Wanted spring suitable for spring motor.

WANTED.—Useful Novelties, practical tools, labor saving devices for use in shipping and packing departments. Any good articles which will facilitate shipping, packing or branding goods. Address B. & S. Co., Box 773, New York City.

Inquiry No. 8596.—Wanted to buy printed pillow tops for sofa pillows.

PATTERN LETTERS AND FIGURES (White Metal and Brass) for use on patterns for castings. Large variety, prompt shipments. Send for catalog. H. W. Knight & Son, Seneca Falls, N. Y.

Inquiry No. 8597.—Wanted to buy an alcohol furnace to heat a hot water system.

WANTED to interest manufacturer of metal stampings take new and useful curtain fixture. Patents pending. Nothing to compete with it on the market. Haven't got capital to manufacture alone. Box 34, Zeandale, Kan.

Inquiry No. 8598.—Wanted to buy water turbines.

PATENTS FOR SALE.

TILTING GATE.—Patent No. 822,746. Will sell outright or lease on royalty my tilting gate. Demand will be enormous. Address C. H. Lovering, Sidney, Mont.

Inquiry No. 8599.—Wanted to buy a 12-inch copper cylinder head.

FOR SALE.—Patent No. 885,023, April 21, 1908. New and useful improvements in door check. Simple, cheap, tried and proven. E. G. Deloe, 3129 Cedar St., Phila., Pa.

Inquiry No. 8606.—Wanted to buy a cutting and winding machine for narrow fabric bias binding.

HELP WANTED.

TWELVE OFFICES covering entire business world. Office, Sales and Technical positions open for ambitious men. For full particulars write Hapgoods, 305 Broadway, New York.

Inquiry No. 8607.—Wanted to buy an electric incubator.

WANTED.—Capable man of executive ability with practical knowledge of technical matters pertaining to boilers and machinery. Must be able to supervise small shops and handle technical and business correspondence. Address Capable, Box 773, New York.

Inquiry No. 8608.—Wanted to buy broom machinery, broom corn, broom handles.

WANTED.—Man. Must be willing to learn and capable of acting as our local representative. No canvassing or soliciting. Good income assured. Address Nat'l Co-operative Realty Co., Dept. F. B. Z., Washington, D. C.

Inquiry No. 8610.—Wanted addresses of manufacturers of collapsible tube machinery.

WANTED.—A good, all-round mechanic to act as inspector of a new automatic machine. Must be thoroughly familiar with electrical construction and mechanism similar to that employed in the Cash Register. Apply, giving references, to the Sceniscope Company, Mills Building, Third Floor, Jackson Boulevard and Green Street, Chicago, Ill.

WANTED—MISCELLANEOUS.

WANTED.—Plan for tricycle or vehicle operated by hand or foot power or both. Address with particulars Thomas Price, National Home, Wisconsin.

Inquiry No. 8611.—Wanted to buy springs for light power purposes.

BOOKS AND MAGAZINES.

BUILD MISSION FURNITURE. Send 20 cents for three designs of easily made pieces of furniture for hall, den or library. Full directions for making and putting together. Furniture can be made by anyone who can handle a saw. List of books on home handicrafts free. Ask for free sample copy of Electrician and Mechanic, finely illustrated magazine written in popular style, devoted to all kinds of mechanical work. Sampson Publishing Company, 1151 Beacon Building, Boston, Mass.

Inquiry No. 8615.—Wanted to buy a machine for breaking the hull of the almond nut without breaking the fruit.

HOUSEHOLD NEEDS.

BUTCHER'S BOSTON POLISH is the best finish made for floors and interior woodwork. Not brittle; will not scratch or deface like shellac or varnish. Send for free booklet. For sale by dealers in Paints, Hardware and House Furnishings. The Butcher Polish Co., 356 Atlantic Avenue, Boston, Mass.

Inquiry No. 8616.—Wanted to buy for export to Porto Rico perforated metal shelving.

BUNGALOWS.

THE MAY NUMBER of American Homes and Gardens contains photographs and plans of big and little, costly and inexpensive bungalows, as well as articles on the furnishing of bungalows. Double number. Price, 50 cents. Order from your newsdealer or from Munn & Co., 361 Broadway, New York City.

Inquiry No. 8617.—Wanted to buy for export to Porto Rico complete baking plant for 1,000 loaves daily.

Inquiry No. 8620.—Wanted to buy aluminium cans.

Inquiry No. 8621.—Wanted to purchase coal briquetting machinery.

Inquiry No. 8622.—Wanted to buy automobile engines and supplies.

Inquiry No. 8623.—Wanted to buy electric cooking stoves with battery attached.

Inquiry No. 8624.—Wanted to buy portable rivet heaters.

Inquiry No. 8625.—Wanted to buy small sized channel iron, also leaf springs for experimental work.

Inquiry No. 8626.—Wanted to buy lacquered and plain sheet steel for sign making, also paraffining outfit for signs, presses for wood signs and sheet rubber.

Inquiry No. 8627.—Wanted to buy an alternating current generator of 2 K. W. capacity, or smaller.

Inquiry No. 8628.—Wanted to buy paving block machines for use with partly fluid substances.

Inquiry No. 8629.—Wanted to buy rubber specialties and coiled brass springs.

Inquiry No. 8631.—Wanted to buy fruit evaporators.

Inquiry No. 8632.—Wanted to buy machine for perforating music rolls.

Inquiry No. 8633.—Wanted to buy show cases.

Inquiry No. 8634.—Wanted to buy brass, bronze and china novelties.

Inquiry No. 8635.—Wanted to buy mica chimneys and smoke tops.

Inquiry No. 8636.—Wanted to buy household brushes.

Inquiry No. 8637.—Wanted to buy lawn mower grinders.

Inquiry No. 8638.—Wanted to purchase mica or porcelain insulation.

Inquiry No. 8639.—Wants stencils for decorative borders such as are used around half tones.

Inquiry No. 8640.—Wanted to buy alcohol lamps for lighting purposes.

Inquiry No. 8641.—Wanted to buy a self-lighting gas burner.

Inquiry No. 8642.—Wanted to buy a gasoline motor inspection car standard gage.

Inquiry No. 8643.—Wanted to buy concrete post machines.

Inquiry No. 8644. Wanted address of glass tube manufacturer who does bending.

Inquiry No. 8645.—Wanted to buy parts for curling irons.

Inquiry No. 8646.—Wanted to buy cheap small motor from ¾ to 1 horse power, single phase 60 cycle, 110 volts.

Inquiry No. 8647.—Wanted to buy steel hat pins 8 inches pointed at both ends.

Inquiry No. 8649.—Wanted to buy non-inflammable celluloid.

Inquiry No. 8650.—Wanted to buy file cutting machinery.

Inquiry No. 8651.—Wanted to buy apparatus for making gas from oil.

Inquiry No. 8652.—Wanted address of manufacturers of drop forged wrenches.

Inquiry No. 8653.—Wanted addresses of dealers in sheet steel, New York city preferred.

Inquiry No. 8654.—Wanted addresses of case-hardeners in New York.

Inquiry No. 8655.—Wanted to buy leather for motor cycle mud guards.

Inquiry No. 8656.—Wanted to buy parts of models and gear wheels.

Inquiry No. 8657.—Wanted to buy a small water motor.

Inquiry No. 8658.—Wanted to buy cooking stoves and lamps using denatured alcohol as fuel.

Inquiry No. 8660.—Wanted to buy creosote making machinery.

Inquiry No. 8661.—Wanted to buy macbinery for making cutlery.

Inquiry No. 8662.—Wanted to buy small machine for drawing thread from cotton and machine for making lozenges.

Inquiry No. 8663.—Wanted to buy file cutting machines.

Inquiry No. 8665.—Wanted to buy comb making machinery.

Inquiry No. 8666.—Wanted to buy screw making machinery.

Inquiry No. 8667.—Wanted to buy needle, pin and pen machinery.

Inquiry No. 8668.—Wanted to buy water power washing machine.

Inquiry No. 8669.—Wanted to buy machinery for making rifle barrels.

Inquiry No. 8670.—Wanted to buy a low-cost or second-hand lathe to be operated by foot power.

Inquiry No. 8671.—Wanted to buy welting and machinery for making same.

Inquiry No. 8672.—Wanted to buy 2,500-pound gasoline traveling crane.

Inquiry No. 8673.—Wanted to buy folding umbrellas.

Inquiry No. 8674.—Wanted to buy machinery for cultivating rice and making Yuca starch.

Inquiry No. 8675.—Wanted to buy machinery for making sawdust into bricks for fuel.

Inquiry No. 8676.—Wanted to buy flat irons heated by denatured alcohol.

Inquiry No. 8677.—Wanted to buy model safety razors.

Inquiry No. 8678.—Wanted to buy cheap sewing machines.

Inquiry No. 8679.—Wanted to buy cheap guns.

Inquiry No. 8680.—Wanted to buy cheap watches.

Inquiry No. 8681.—Wanted to buy envelope making machines.

Inquiry No. 8682.—Wanted to buy model of old battleship "Maine."

Inquiry No. 8683.—Wanted to buy plant for making cassava starch.

Inquiry No. 8684.—Wanted to buy fountain pens in quantities.

Inquiry No. 8685. Wanted to buy 1½ to 2-inch No. 13 to 18 tempered spring steel.

Inquiry No. 8686.—Wanted to buy machine for dusting talcum on sheets.

Inquiry No. 8687.—Wanted to buy motor plows.

Inquiry No. 8688.—Wanted to buy for export to Cuba a producer gas plant for supplying 800 16 C. P. lamps.

Inquiry No. 8689.—Wanted to buy alcohol engines for same amount of power as 8688.

Inquiry No. 8690.—Wanted to buy coppered wire (No. 7) in lengths 13 to 26 inches, threaded on one end.

Inquiry No. 8691.—Wanted to buy for export to British Guiana alcobol motors.

Inquiry No. 8692.—Wanted to buy kerosene oil motors for export.

Inquiry No. 8693.—Wanted to buy meteorological instruments.

Inquiry No. 8694.—Wanted to buy fly wheels and ball bearings.

Inquiry No. 8695.—Wanted to buy bathing suits.

Inquiry No. 8696.—Wanted to buy toy balloons.

Inquiry No. 8697.—Wanted to buy zinc can screw tops.

Inquiry No. 8698.—Wanted to buy a hydrochloric acid plant.

Inquiry No. 8699.—Wanted to buy two-stranded soldered wire for heddles.

Inquiry No. 8700.—Wanted to buy burglar proof door fasteners.

Inquiry No. 8701.—Wanted to buy solar engines.

Inquiry No. 8702.—Wanted to buy machinery for filling and sealing paper boxes.

Inquiry No. 8703.—Wanted to learn address of music printers.

Inquiry No. 8704.—Wanted address of kaolin expert.

Inquiry No. 8705.—Wanted to buy double shaft engines for automobiles.

Inquiry No. 8706.—Wanted to buy ink and mucilage bottles and labels.

Inquiry No. 8707.—Wanted to buy hand power vacuum cleaner.

Inquiry No. 8708.—Wanted samples and prices on boxes, bottles, jars, cartons, etc., to put up proprietary articles.

Inquiry No. 8709.—For manufacturers of gut cleaning machines.

Inquiry No. 8710.—For machinery for carding, spinning and weaving jute.

Inquiry No. 8711.—Machinery for making books and eyes.

Inquiry No. 8712.—Machinery to cut ditch 18 inches to 2½ feet wide and from 3½ to 10 feet deep for laying tiles.

Inquiry No. 8713.—For manufacturers and dealers of cement manufacturing machinery and kilns.

Inquiry No. 8714.—For manufacturers of farmers' and carpenters' ladders.

Inquiry No. 8715.—Manufacturers of domestic novelties and labor-saving devices.

Inquiry No. 8716.—For manufacturers of flower garden and light frame tools for cultivating, etc.

Inquiry No. 8717.—Wanted address of firms that do wood carving or stone carving, ornamental or in buildings.

Inquiry No. 8718.—For manufacturers of steel frames for glass roofs, skylights, etc.

Sign, electric, G. C. Nientimp	889,115
Signaling apparatus, selecting device for electrical, J. Burry	888,692
Signaling, electric, Hallett & Kamerer	888,885
Sled, bob, L. D. Jannell	888,888
Smelting furnace, reverberatory, A. D. Lee	888,624
Snap hook and buckle, combined, J. W. Hutchison	889,013
Snow melting machine, A. S. Emerson	888,979
Snow plow coupling device, J. W. Russell	888,536
Solid material, apparatus for treating, J. Gormly	889,120
Solid material, treating, J. Gormly	888,608
Solid materials, apparatus for classifying, R. E. Trottier	888,767
Sound, device for regulating and justifying reproduced, A. Ford	888,986
Spark coil, J. O. Heinze, Jr.	888,611
Spark plug, E. Bruden	888,782
Sparking plug, L. Kantrowitz	888,711
Speed indicator, E. T. Greenfield	888,705, 888,708
Spherical structures, jacket for, F. L. Sheldon	888,854
Spinning machine attachment, P. D. Gould	888,998
Spoon, W. P. Herbst	888,499
Sprinkling machine, sand or other, N. St. Peter	889,058
Square and siding gage, combined try, W. J. Finn	888,985
Stacker, pneumatic, L. M. Anderson	888,571
Stair, S. Grossman	888,882, 888,884
Stair, J. V. Matteson	888,920
Stairway, moving, G. A. Wheeler	888,949, 888,950
Stairway, moving spiral, G. A. Wheeler	889,080
Stamp, hand, Crouse & Barnett	888,593
Stanchion, cattle, Rodden & Gray	888,045
Stand. See Display stand.	
Steam boiler, sectional water tube, H. Del Mar	888,789
Steam superheating apparatus, E. F. Osborne	889,147
Steamship, A. M. Hurel	888,503
Stirrup, K. F. Ebel	888,699
Stirrup, safety, W. Jones	889,018
Stoking apparatus, C. W. Crosby	888,875
Stop-motion, twister, A. E. Rhoades	888,740
Stove, alcohol, A. Richter	889,047
Sweep holder, W. W. Reid	888,849
Switch controlling mechanism, J. M. Lieb	888,915
Switch operating mechanism, F. A. Fricker	888,605
Syringe, J. Kinsel	889,022
Tack or nail driving device, P. R. Glass	888,485
Tack puller, J. E. Naudain	888,841
Tank heater, M. A. Thorpe	889,068
Telegraph lines, duplexing, I. Kitsee	888,511
Telegraphic system, cable, I. Kitsee	888,509
Telegraphy, I. Kitsee	888,510
Telephone cut-off or muffler, G. S. Knowles	888,822
Telephone exchange system, E. R. Corwin, 888,872 to	888,874
Telephone switchboard signal apparatus, G. H. Ryder	888,748
Telephone system, E. R. Corwin	888,870, 888,871
Telephone, wireless, F. J. McCarty	889,031
Telephony, I. Kitsee	888,507
Temperature regulator, V. F. Davis	889,182
Thread cutter, J. F. Wilkins	888,563
Thumb or finger attachment, N. Duperrault	888,976
Tile, J. H. Pugh	888,530
Tire, cushion, J. B. Jordan	888,906
Tire, pneumatic, C. E. Titus	889,069
Tire-tightening apparatus, G. R. Macomber	888,628
Tire, vehicle, H. A. Knox	888,823
Toaster, N. S. Clark	888,960
Tobacco cutter and box, J. H. A. McPhee	888,642
Tobacco product and manufacturing the same, K. E. Rogers	888,743
Tobacco stemming machine, J. O. Morris	888,835
Toilet seat, sanitary, J. A. Kleine	888,821
Token holder, R. N. Simpson	888,539
Tongs, pipe and rod lifting, O. Wilson	889,078
Tool, J. L. Janeway	888,710
Tool, combination, C. C. Fields	888,795
Torpedo expulsion tube, L. Y. Spear	888,544
Torpedoes on railways from platforms, machine for distributing, J. A. Hall	888,706
Toy, pyrotechnical, A. Jedel	888,810
Trace splice, Fisher & Reynolds	889,114
Track clearer, G. A. Parmenter	888,730
Traction wheel, H. B. Rohlf	888,933
Transmission mechanism, O. W. Davis. 888,594,	889,181
Transmission mechanism, variable, O. W. Davis	888,876
Trimmer, J. E. O'Hearne	888,645
Trolley, C. M. Whitcomb	888,677
Trolley, A. S. Janin	889,015
Trolley wheel, F. M. Gass	888,993
Trolling spoon, F. S. Sams	888,935
Trousers stretcher, M. B. Jackson	889,014
Truck, car, J. Murphy	888,640
Trucks, conveyer for hand, H. C. Coward	888,591
Trunk harness tightener, G. M. Powers	889,042
Tube cleaner, T. Andrews, reissue	12,799
Tunnels, method and apparatus for constructing subaqueous, B. Douglas	888,790
Turbine, J. Hissink	888,500
Turbine, multiple stage, J. Karrer	889,019
Typewriter, C. M. Sorensen	888,856
Typewriter operator, B. F. Hutches, Jr. 888,807,	888,808
Typewriter platen, W. R. Van Slyke	888,556
Typewriters, keyboard cover for, A. L. Gilbert	888,184
Typewriting machine, C. A. Bennett	888,457
Typewriting machine, H. W. Merritt	888,832
Typewriting machine, M. W. Pool	888,925
Typewriting machine, J. A. Ronchetti	888,934
Typewriting machine, Brown & Briggs	889,102
Typewriting machine, J. C. McLaughlin	889,144
Umbrella, folding, J. Casale	888,468
Upholstery, Messersmith & Healy	888,720
Urinary apparatus, V. D'Incognito	888,477
Valve, C. Kapenos	888,817
Valve, engine, J. W. Chenoweth	888,470
Valve for radiators, F. W. Leuthesser	889,141
Valve for radiators, air, F. W. Leuthesser. 888,914,	889,142
Valve gage, A. O. Kooken	888,826
Valve, radiator, F. W. Leuthesser	888,913
Valve, receptacle filling, W. J. Cunningham	889,106
Valve, reversing, U. A. Peters	888,736
Vapor burner, incandescent, Heimritz & McCuen	888,707
Vehicle dumping bed or body, T. A. & E. L. Faughman	888,601
Vehicle, motor road, F. H. Royce	888,535
Vehicle reach, J. M. Bryant	888,584
Vehicle seat, Barndt & Miller	888,778
Vehicle storm top, T. A. Welshans	888,948
Vehicles, spring wheel for road, F. Wicks	889,077
Velocipede, C. F. Speice	888,666
Vending machine, stamp, E. E. Wirzell	888,562
Vessel or the like, double walled, R. Burger	888,783
Vessels, indicator for locating sunken, J. Long	889,024
Vibrator, M. K. Golden	888,996
Wagon, Litchfield & Garst	888,626
Wagon attachment, L. S. Hyde	888,898
Wagon, dumping, J. J. Euley	888,793
Wardrobe bureau, J. Bryant	889,175
Washer, C. G. Ette	888,982
Washing apparatus, F. Stocker	888,766
Washing machine, W. D. Whitney	889,166
Washing machine, circulating, W. Bartholomew	888,576
Water closet, A. M. Morrison	888,636
Water closet, outdoor, A. G. Naviokus	888,643
Water gage, Scott & Corbett	888,659
Wave and current motor, C. G. Raehr	889,153
Wave motor, S. R. Milbury	888,721
Weighing apparatus, M. H. Avram	888,572
Well-drilling machinery, H. R. Decker	889,110
Wheel. See Fan wheel.	
Wheel, A. L. Jimenez	888,504
Wheel, C. B. Van Horn	888,673
Whiffletree clip, A. Miller	888,632
Window, casement, E. P. Sperry	888,545
Window construction, sheet metal, E. A. Sanders	888,657
Window fastener, show, G. C. Marr	888,919
Window screen, F. E. Taylor	889,064
Wire cutting device, C. Burdick	889,177
Wire fastener, line, L. Stanton	888,763
Woodworking machine feeder, J. C. Lndwig, Jr.	889,025
Wool washing machine, F. G. Sargent	889,157
Wrapper for braid and similar articles, J. Baer	888,686

IF

You see him along the barrel of a

WINCHESTER

22 AUTOMATIC RIFLE

HE'S YOURS!

THIS handy little ten-shot rifle, like history, repeats itself, the recoil being utilized to do the reloading. The novelty of its operation affords possibilities for practice and pleasure which no other "twenty-two" does. It makes an outing outfit complete.

FREE: Send address for Catalogue of Winchester—the Red W Brand—Guns and Ammunition.

WINCHESTER REPEATING ARMS CO.
NEW HAVEN, CONN.

Trying to fix up the Week-End Bills

The Underwood
Retail Bill and Charge Machine

Has solved the above problem for Thousands of Retail Merchants

The Time and Money Saved, Satisfactory Results secured, and Typewritten Statements obtained, are matters for Serious Consideration

Ask your Underwood Man for Particulars, or address the

UNDERWOOD TYPEWRITER CO., Inc.,
241 Broadway,
New York, U. S. A.

Wizard Repeating
LIQUID PISTOL

Nickel-plated 5 in. long. Pat'd

Will stop the most vicious dog (or man) without permanent injury. Perfectly safe to carry without danger of leakage. Fires and recharges by pulling the trigger. Loads from [illegible] Liquid. No cartridges required. Over six shots in one loading. All dealers, or by mail, 50c. Rubber-covered Holster, 10c. With Pistol, 55c. Money-order or stamps. No coins.

PARKER, STEARNS & CO., 226 South Street, Dept. G, New York

Do Your Own Printing

$5 press prints cards labels, etc Circular, book, newspaper press $18. Money saver, maker. All easy. Rules sent. Write factory for press catalog, type, paper, etc.

THE PRESS CO., Meriden, Conn.

CURTISS WORLD'S RECORD MOTORCYCLES



New Single and Double Cylinder Models for 1908 now ready. Diamond Medal, Highest Award, National Endurance run, won on a Curtiss. Send for Catalogue H and Booklet "Achievements."

G. H. CURTISS MFG. CO., Hammondsport, N. Y.

First and Original Motor Buggy
$250 "SUCCESS" AUTOMOBILE

Practical, durable, economical and absolutely safe. A light, strong, steel-tired Auto-Buggy. Suitable for city or country use. Speed from 4 to 40 miles an hour. Our 1908 Model has an extra powerful engine, patent ball-bearing wheels; price, $275. Also 10 h. p., $400. Rubber Tires, $25.00 extra. Write for descriptive literature. Address SUCCESS AUTO-BUGGY MFG. CO., Inc., St. Louis, Mo.

Pioneer Perfect Frames are the Standard

of knock-down boat construction. You can easily build this boat yourself with Pioneer Perfect Frames, the **only** frames having ribs bent to **exact shape, set up, trued, tested** and **beveled** for **planking** before being knocked down for shipment to you.

Pioneer Perfect Frames save **all** the hard work, and **two-thirds** the **cost** of a similar, complete boat. **Remember,** with Pioneer Frames we furnish, absolutely **free,** patterns and instructions for completing your boat. Order Pioneer Frame **TO DAY** on the **Easy Payment** plan and see for yourself the **simplicity** of the Pioneer System. If you haven't time, or cannot get material conveniently to complete your boat yourself, write us for low-priced, perfect **Decking, Planking, Fittings, Engine,** etc. Write **TO-DAY** for **FREE** Book of Pioneer Perfect Frames and Full-Size Patterns, etc., or send 25c. for **100-page boat-builders' book.** 300 illustrations. All about our 40 types of boats, engines, etc. Money back if not satisfied.

PIONEER BOAT AND PATTERN CO., Wharf 261, Bay City, Mich.

The Refined Motor

3 H.P. but developing as much power as other motors rated 4 H. P. **Bore 3½ inch; stroke 3½ inch; turning a 12 inch propeller, 17 pitch, 200 to 800 revolutions a minute. Weight 50 pounds. Reliability,** strength, simplicity, power and durability. **Only four movable parts.** Exclusive float feed carburettor. No valves, springs, triggers, cams, gears, gaskets, nor packing requiring attention. All bearings bronze bushed. Crank shaft hardened and ground.



Cylinder, piston and rings ground. Spun copper water jacket. Pumps from bilge and sea-cock. The one **sure-to-be** satisfactory Motor for Launches, Canoes, Rowboats, Dories and Dingheys. We devote all our skill and thought on this one Motor. It is a little whirlwind for power; the biggest motor value and satisfaction in the world. Everyone fully tested and guaranteed for two years. It's the Motor you want. Price of Motor complete for installation, $50. Immediate delivery. Write for catalog and address of nearest agent.

Thrall-Fishback Motor Co.
47 Fort Street East, Detroit, Mich., U.S.A.

Make a Motor Boat of any Boat in 5 Minutes

Here's a little, 2 h. p. marine motor (40 lbs. complete). Attach to the stern post of your boat in 5 minutes, without any tools. Drives an ordinary row boat 7 miles per hour. Runs 8 hours on one gallon gasoline. Float Feed Carburetor. Simplest motor made—does not get out of order. Catalog C free.

We also make CANOE MOTORS in 1, 2, 3 and 4 cylinders, 2 h. p. weighs 32 lbs. Shipped ready for installation. Fully guaranteed. Send for Catalog K.

WATERMAN MARINE MOTOR CO.
1509 Fort St. West, Detroit, Mich.

Ten Days' Free Trial

allowed on every bicycle we sell. We ***Ship on Approval*** and trial to anyone in U. S. and *prepay the freight.* If you are not satisfied with bicycle after using it ten days *don't pay a cent.*

Factory Prices *Do not buy a* bicycle or a pair of tires from *anyone* at *any price* until you receive our latest **Art Catalogs** of high grade bicycles and sundries and learn our *unheard of prices* and *marvelous new offers.*

It Only Costs a cent to write a postal and everything will be sent you **FREE** by return mail. You will get much valuable information. **Do Not Wait; write it Now!**

Tires, Coaster Brakes, single wheels, parts, repairs and sundries at *half usual prices.*

MEAD CYCLE CO., Dept. S-269, Chicago

A RARE OPPORTUNITY with small capital, for a paying business in every city. Don't miss it! Three stamps for sample. Prof. Chase, Melrose, Mass.

The Largest Air-Cooled Motor Made

5 HORSE POWER

Bore 6 x 6 inches.

Plenty of cooling surface. No engine ever constructed with so few working parts.

Write for Agency.

Gasoline tank in base or outside.



Air-Cooled Motor Co.
Lansing, Mich.

60 YEARS' EXPERIENCE

PATENTS

TRADE MARKS
DESIGNS
COPYRIGHTS &C.

Anyone sending a sketch and description may quickly ascertain our opinion free whether an invention is probably patentable. Communications strictly confidential. HANDBOOK on Patents sent free. Oldest agency for securing patents.

Patents taken through Munn & Co. receive *special notice,* without charge, in the

Scientific American.

A handsomely illustrated weekly. Largest circulation of any scientific journal. Terms, $3 a year; four months, $1. Sold by all newsdealers.

MUNN & Co. 361 Broadway, **New York**
Branch Office, 625 F St., Washington, D. C.

Yeast compound, J. E. Yost 889,082
Yeast from fermenting whisky mash, means for removing, O. G. Luyties 888,627

DESIGNS.

Automobile horn, H. W. Lester 39,320
Badge, W. Brooks 39,315
Badge, J. W. Cherry 39,316
Easel, J. B. Timberlake 39,318
Lamp globe, electric, J. W. Phelps 39,323
Radiator, J. A. Field 39,324
Speedometer casing, J. W. Jones 39,319
Type, font of printing, M. F. Benton, 39,325 to 39,328
Ventilator cap, J. B. Martz 39,321
Watch charm, J. W. Cherry 39,317
Water closet cistern casing, R. E. Crane 39,322

TRADE MARKS.

Antiseptic cream for wounds, etc., N. M. Hoon 69,211
Augers, mining, A. C. Poole Auger Co. 69,174
Baking powder, G. H. Ballou Co. 69,225
Bath-room and lavatory fixtures, Novelty Manufacturing Co. 69,188
Beverages, malt, Acme Brewing Co. 69,221
Biscuits and crackers, New England Biscuit Co. 69,240
Books, account, Compendium Co. 69,176
Boots and shoes, leather, Manss Shoe Manufacturing Co. 69,214, 69,215
Boots and shoes, leather, Woodbury Shoe Co. 69,220
Canned salmon, Griffith-Durney Co. 69,226
Car castings, National Malleable Castings Co. 69,187
Carpets and rugs, J. V. Mawby 69,238, 69,239
Cement, hydraulic, Portland Cementfabrik "Germania" Aktiengesellschaft 69,243
Chairs, pneumatic treads for rocking, Pneumatic Rocker Tire Co. 69,242
Chocolate and cocoa, H. O. Wilbur & Sons 69,233
Clothing, certain, Adler & Ast 69,195
Clothing certain, Dr. Jaeger's Sanitary Woolen System Co. 69,200, 69,201
Coal, Pittsburg-Buffalo Co. 69,189
Coffee, National Grocer Co. 69,186
Coffee, roasted and ground, Tennessee Coffee Co. 69,193, 69,194
Coffee, tea, spices, and flavoring extracts, Roth-Homeyer Coffee Co. 69,190
Conduits, fiber, Fibre Conduit Co. 69,165
Dental anesthetic, Park Dental Supply Co. 69,231
Disinfecting and cleaning preparation, Automatic Disinfecting Co. 69,207
Fabrics, certain dress, Sidney Blumenthal & Co. 69,245
Fertilizers, Birmingham Fertilizer Co. 69,236
Fertilizers, Virginia-Carolina Chemical Co. 69,246
Flour, wheat, Claflin Mill and Elevator Co. 69,237
Flour, wheat, J. Quirk 69,244
Fruit juice, carbonated, M. Wineburgh 69,234
Furnaces, Kelsey Heating Co. 69,212
Game, card, D. C. Mitchell 69,166
"Gas" for disinfecting and medicinal purposes, D. D. Richardson 69,202
Hair pins, Bachmann Brothers 69,223
Harness hardware, certain, Covert Manufacturing Co. 69,177
Hats and caps, Frank P. Heid & Co. 69,197, 69,198
Insulating material, electrical, Rail Joint Co., 69,168 to 69,171
Jams, marmalades, flavoring extracts, etc., H. P. D. Kingsbury 69,227
Kinematographic apparatus and pictures for use therewith, C. Urban 69,173
Medicinal preparations, certain, Home Remedy Co. 69,210
Medicinal preparation, certain, A. M. Goldstandt 69,209
Medicine, veterinary, C. Lageman 69,213
Metal, casting, Klewe & Co. 69,182
Metal polish, Evalang Chemical Co. 69,179
Metal polish, M. Loewenstein 69,229
Metal polishes, W. Hutter 69,180
Metallic fabrics, Mattatuck Manufacturing Co. 69,185
Music rolls, perforated, Standard Music Roll Co. 69,232
Newspaper, Sporting Life Publishing Co. 69,203
Oil, gun, Marshall Oil Co. 69,230
Oil, hoof, A. M. Newman 69,216
Packing, rod and piston, Charleston Metallic Packing Co. 69,196
Paper and typewriter ribbons, carbon, Pen-Carbon Manifold Co. 69,241
Perfumes and perfumed toilet powders, E. Palmer 69,217
Pharmaceutical preparation, certain, Farbwerke vorm. Meister Lucius & Bruning 69,208
Pianos, Kohler & Campbell 69,228
Postal cards, souvenir, T. Liebman & Sons 69,183
Razors, A. Strauss & Co. 69,192
Remedies for certain diseases, Actien-Gesellschaft fur Anilin-Fabrikation 69,205
Remedy for certain diseases, Sharp & Dohme 69,218
Remedy for nervous diseases, R. A. Smith 69,219
Rubber boots, shoes, and overshoes, American Hand Sewed Shoe Co. 69,206
Rules, folding, Stanley Rule and Level Co., 69,172, 69,191
Sewing machine needles, Illinois Sewing Machine Co. 69,181
Soap, Barclay & Barclay 69,175
Spectacles, eyeglasses, and their mountings and parts, Bay State Optical Co. 69,164
Stockings, W. F. Taubel 69,204
Stone, artificial, Deutsche Steinholzwerke, Langguth & Platz 69,178
Sugar, beet, American Beet Sugar Co. 69,222
Sugar, grape, Corn Products Refining Co. 69,224
Tobacco, chewing and smoking, A. J. Livingston 69,184
Tops, whirling, Paris Novelty Co. 69,167
Waterproofing solution, certain, American Cement Waterproofing Co. 69,235
Wicks or night lights, floating, J. G. Hebart 69,199

LABELS.

"Derby," for cigars, C. H. Stout 14,212
"Especiales," for cigars, G. Dottling 14,214
"Esquisitos," for cigars, G. Dottling 14,215
"Gold Seal," for cantaloups, Strachan Fruit Co. 14,221
"Golden Gem Brand," for cantaloups, Strachan Fruit Co. 14,222
"Golden Rule Brand," for cantaloups, Strachan Fruit Co. 14,220
"Imperiales," for cigars, G. Dottling 14,213
"Jacob Ruppert's Extract of Malt," for extract of malt, J. Ruppert 14,219
"Jacob Ruppert Metropolitan Beer," for lager beer, J. Ruppert 14,218
"McClure and Berman's Typhoid Fever Remedy," for typhoid fever remedy, McClure & Berman 14,224
"Selectos," for cigars, G. Dottling 14,216
"Target Rock Whiskey," for blended whisky, S. Lefkowitz 14,217
"Yo-Yo," for a medicinal beverage, Yo-Yo Co. 14,223

PRINTS.

"O'Sullivan's Heels of New Rubber," for rubber heels, Massachusetts Engraving Co. 2,281
"Reckitt's Blue," for bluing for laundry use, Reckitt & Sons 2,280
"Thanks for the Artgum," for artgum, a cleaning composition, A. Sommer 2,279

A printed copy of the specification and drawing of any patent in the foregoing list, or any patent in print issued since 1863, will be furnished from this office for 10 cents, provided the name and number of the patent desired and the date be given. Address Munn & Co., 361 Broadway, New York.

Canadian patents may now be obtained by the inventors for any of the inventions named in the foregoing list. For terms and further particulars address Munn & Co., 361 Broadway, New York.

UNDERFEED Furnace

Echoes from all Parts of the Compass.

JACK FROST has been no respecter of geographical lines during the past few years. News echoes of Southern cold snaps have reverberated thru the frozen North. From all points of the compass, however, comes a flood of unbroken testimony that the

Peck-Williamson Underfeed Furnace

Saves One-Half to Two-Thirds of Coal Bills

The UNDERFEED is an up-to-the-minute Furnace. No other like it. Fed from below. All fire burns on top. Smoke and gases are consumed. ***Cheapest*** slack yields as much heat as ***most expensive*** anthracite. Clean, even heat is a certainty at a cost so low that it is worth anybody's while to study the figures.

Illustration shows furnace without casing cut away to show how coal is forced up under fire, which burns on top.

Protection and Economy are enjoyed by UNDERFEED Furnace owners everywhere. Here are sample briefs from Wisconsin and Georgia—testimonials that bear us out in this declaration:

NORTHWEST

L. J. RUSK, Chippewa Falls, Wis. writes:

"Am using your Underfeed for the fourth Winter. I find it satisfactory in every respect, saving in fuel at least one-third the cost and furnishing TWICE the heat of any furnace I have ever used. I will be glad to explain and recommend the Underfeed Furnace to any one that may inquire personally."

SOUTH

FRANK MANLY, Dalton, Ga., writes:

"The Underfeed Furnace is giving the best of satisfaction. We have never known before what a warm house was and it is needless to say we are enjoying it. I look after the "stoking" principally and find that one good dose before breakfast and another after supper is all that is required to keep a nice, even heat."

Let us send you our Underfeed Booklet—illustrated—and fac-similes of other such voluntary testimonials. This and services of our Engineering Department, with plans for heating service—absolutely FREE. Write today, and give name of local dealer with whom you prefer to deal.

THE PECK-WILLIAMSON CO. 351 W. Fifth, CINCINNATI, O.

DEALERS—Our Latest Proposition is Worth Asking About

BUILD IT YOURSELF

SUMMER COTTAGE

SAVE CONTRACTOR AND LABOR BILLS

The houses are sawed out complete, every stick cut to right length and dressed—best clear lumber—and fitted in our mill, then knocked down, ready to be erected. Sent anywhere, with complete instructions and blue prints of every step. Cost, erected, 30 per cent. less than contractor charges. *Send To-day for Catalogue* 12. Please enclose stamp.

NORTH AMERICAN CONSTRUCTION COMPANY, Bay City, Mich.

Easy to Build with our Perfect Sawed and Fitted Knocked Down House.

And no tool but a hammer needed. An amateur – in fact anyone who can hit a nail with a hammer can put up our perfectly sawed out, complete

"Aladdin" KNOCKED DOWN HOUSE

"Aladdin" Summer Cottages are made in four styles, from $98 to $298; the above is a 5-room cottage, sitting-room 10 x 16, and four 8 x 10 rooms.

"Aladdin" Auto Garages . $69 to $230
"Aladdin" Boat Houses . . $49 to $129
"Aladdin" Dwelling House. . . . $492

Six rooms complete, including patent lath and plaster, windows, doors, paint and hardware.

YOUR ENGLISH MARKET?

ARE YOU AFFECTED BY RECENT CHANGES IN BRITISH PATENT LAW?

A large metal specialty manufacturing company in Birmingham is prepared to take up the making and marketing, in the United Kingdom (possibly Continental Europe also), **one or two American specialties** which have already proven large sellers. Only articles having a large sale in the United States will be considered. Address

CHARLES M. DALLY, 29 Broadway, New York City

METAL STAMPINGS
TOOLS, DIES and EXPERIMENTAL WORK
Well Equipped Factory for General Machine Work. Send sample or drawing for estimate.
Eastern Machine and Stamping Co. Providence, R. I.

LET US BE YOUR FACTORY
STAMPINGS, MODELS, EXPERT WORK
THE GLOBE MACHINE AND STAMPING CO.
970 Hamilton St., Cleveland, O.

ICE MACHINES Corliss Engines, Brewers' and Bottlers' Machinery. THE VILTER MFG. CO., 899 Clinton St., Milwaukee, Wis.

MODELS & EXPERIMENTAL WORK. Inventions developed. Special Machinery.
E. V. BAILLARD, 24 Frankfort Street, New York.

RUBBER Expert Manufacturers Fine Jobbing Work
PARKER, STEARNS & CO., 228-229 South Street, New York

Experimental & Model Work
Cir. & advice free. Wm. Gardam & Son, 221 Fulton St, N.Y.

ELECTRIC GOODS.—Big Cat. 3 cts. Want Agents. Ohio Electric Works, Cleveland, O.

MODELS & EXPERIMENTAL WORK, Gears, Dies, Tools, Novelties manufact'd.
M. P. SCHELL, 179 Union Street, San Francisco

MODELS & GEARS INVENTIONS PERFECTED. UNION MODEL WORKS 193 So. CLARK St. CHICAGO.

DRYING MACHINES For all kinds of granular materials. S. E. Worrell, Hannibal, Mo.



Removed to 182 Milk Street.

ITALIAN LABOR SUPPLIED FREE OF CHARGE

For railroad building, water works, quarries, and all kinds of construction work by

THE LABOR INFORMATION OFFICE FOR ITALIANS, Inc.
59 Lafayette (formerly Elm) St., N. Y. City

No charge either to applicants for help or to the laborers.

Send for circulars and application blanks.

DISAPPEARING CIGAR A NEW TRICK

Fool your friend. See him laugh. Imitation cigar, goes up your sleeve. 12 cents postpaid.
C. JAMES, 5 Mills Building, St. Louis, Mo.

KWITURFIGURWURY RED BOOK ON FIGURES FREE

32-page book. Simplified figuring on Rapid Calculations. The Only book of its kind. Be a Rapid Calculator. Ten cents for mailing charges.

Frank Malone, 28 Mills Bldg., St. Louis, Mo

Bliss Electrical School

214 G Street N. W., Washington, D. C.

Offers a theoretical and practical course in ELECTRICITY, complete in one year. Students actually construct Dynamos, Motors, etc., and are trained for good positions in electrical industries. **16th** year opens September 23. Send for Catalog.

VENTRILOQUISM

Learned by any Man or Boy at home. Small cost. Send to-day 2-cent stamp for particulars and proof.
O. A. Smith, Room 763, **2040 Knoxville Ave., Peoria, Ill**

Telegraphy Circular free. Wonderful automatic teacher. 5 styles $2 up. **OMNIGRAPH CO.,** Dept. 52, **39 Cortlandt St., New York**

Garden Hose

Rubber Belting

Steam Packing

Rubber Specialties

N. Y. BELTING & PACKING CO.
LIMITED
91 and 93 Chambers Street
NEW YORK
WRITE FOR CATALOGUE

DECARBONIZER

chemically removes carbon from cylinders, piston rings and valves.
INCREASES POWER 20 PER CENT
Volatilizes carbon, in which form it passes out thru exhaust. **Injury to metal impossible.** Agents wanted in certain localities. **Sample, quart can, $1.50.** Write to-day for particulars.
General Accumulator & Battery Co
128 Second Street, Milwaukee, Wis.

Gaylor

Automatic Stroppers Will Sharpen All
PRICE $1.00
Safety Razor Blades
Quicker and Better than any other Stropper in the World
In case with barbers' genuine Horse Hide Strop, $2.00
Order through your dealer. Or will send postpaid on receipt of price. Be sure to state for what make of Blade. Write for descriptive circular.
L. B. GAYLOR, Allston, Mass.

COERZ

PHOTO LENSES
SHUTTERS
ANSCHÜTZ CAMERAS
RIFLE TELESCOPES.
TRIEDER BINOCULARS
Send 9 cents for beautiful de luxe general catalogue.

C. P. GOERZ AM. OPTICAL CO.
52 E. Union Square, N. Y. City
1514 Heyworth Bldg. Chicago Ill.
703 Call Bldg., San Francisco, Cal.

OWN A FACTORY

Big money making concrete blocks. Pettyjohn plants successful everywhere. Patented Portable and Collapsible Machine is the best, fastest, simplest and cheapest. No off-bearing. No cracked or broken blocks. No expensive iron pallets. Trade rapidly increases. No experience necessary. We furnish complete instructions. Now is the time to start. Write for full particulars.
The Pettyjohn Co., 615 N. 6th St., Terre Haute, Ind.

Do You Appreciate

Absolute Reliability and Easy Starting?



Our 1908 Models will contain more real *motor value* than has ever before been incorporated in one small motor.

They are made especially for the man who wants the best.

CUSHMAN MOTOR COMPANY
2026 N. St., Lincoln, Neb., U. S. A.

FOX MOTORS

HIGH SPEED - HEAVY DUTY
COMPLETE 1 TO 6 CYL
We are the only manufacturers who sell on the bore and stroke of our cylinders; and agree to refund your money if, after 30 days' trial, you see fit to return the engine. Write for catalog.
THE FOX REVERSIBLE GASOLINE ENGINE CO.
213 Front St., South Cincinnati, Newport, Ky.



The No. 1A Folding Pocket Kodak *Special.*

Just as good as a camera can be made—so small as never to be in the way. Rapid Rectilinear Lens, Automatic Shutter with pneumatic release. Highest grade in every detail.

Pictures, 2½ x 4¼. Price, $15.00.

EASTMAN KODAK CO.,
All Dealers. ROCHESTER, N. Y., *The Kodak City.*

THAT DAINTY MINT COVERED CANDY COATED CHEWING GUM

Chiclets

At All the Better kind of Stores
5 cents the Ounce
or in 5¢, 10¢ and 25¢ Packets

REALLY DELIGHTFUL

If your neighborhood store can't supply you send us 10c for sample packet.
FRANK H. FLEER & COMPANY, INC., Philadelphia, U. S. A., and Toronto, Can.

"If It's Wireless We Make It."

THE COLLINS WIRELESS TELEPHONE CO.

MAKERS OF

The Collins Long Distance Wireless Telephone

(A. FREDERICK COLLINS, Technical Director)
and Manufacturers of

Wireless Telephone and Telegraph Apparatus of Every Description

Induction Coils, Transformers, Keys, Tuning Coils,
Condensers, Detectors, Relays, Resistances, etc.
Complete sets for any distance. Send for illustrated list.

COLLINS WIRELESS TELEPHONE CO.

Offices and Laboratory:

52 and 54 CLINTON STREET, NEWARK, NEW JERSEY, U. S. A.

HAND POWER
BENCH DRILLS

We manufacture a great variety of these little machines which are of inestimable value around almost any shop. We should be glad to send you our catalog showing the complete line of tools and machines made by us.
GOODELL-PRATT CO., GREENFIELD, MASS.

LUFKIN
TAPES AND RULES
ARE THE BEST.
For sale everywhere. Send for Catalog No. 16.
LUFKIN RULE CO.
Saginaw, Mich., U. S. A.
New York and London.

Tools! Tools! Tools!

We keep all kinds. Send your name on a postal and get our 88-page Booklet

Montgomery & Co., 109 Fulton St., New York City

"HOW TO REMEMBER"
Sent Free to Readers of this Publication

Stop Forgetting

You are no greater intellectually than your memory. Easy, inexpensive. Increases income; gives ready memory for faces, names, business details, studies, conversation; develops will, public speaking, personality. Send today for Free Booklet. Address
DICKSON MEMORY SCHOOL, 700 Auditorium Bldg., Chicago



The "SIMPLO" Automobile

THE LATEST AND BEST

Solid or pneumatic tire. High or low wheels. The one automobile at a ***Low Price*** that is always ready to run. Handsome, Stylish, Simple, Reliable, Economical to Operate, Safe and Sure. A Hill Climber that will go over the worst roads.

If you want the ***Biggest Value*** in automobiles to-day, write for our 1908 Booklet.

COOK MOTOR VEHICLE CO., 1020 N. Broadway, St. Louis, Mo.

ORDNANCE EXPERTS

Send for full information about the new

1908 Model Lewis Depression Position Finder

Address **CHARLES M. DALLY, Ordnance Specialist, 29 Broadway, New York, U. S. A.**
Cable Address CHASDALLY, NEW YORK



TWICE-TWO CYCLE MOTOR

New Era in Construction—Higher efficiency; greater reliability; more compactness; simpler. No gear wheels or cam shafts, no smoke, no odor, no compression in crank case. Single cylinder, 5-inch bore, 6-inch stroke, 600 R. P. M. Gives 12 Brake Horse Power. Rating guaranteed actual horse power delivered on the brake at speeds indicated. Write for illustrated catalog.

Two-cycle simplicity with more than four-cycle efficiency.

THE TWICE-TWO CYCLE ENGINE CO., Inc., 22 South Canal Street, Chicago, Ill.

Try It Yourself Five Days Free

This simple, practical, accurate computer **costs only a fraction** of the **price of key machines** and does everything they do except print.

Rapid Computer Adding Machine

does its work perfectly in any position—at any angle. You can rest it on any desk or on book page alongside column of figures you wish to add. It's a wonder as a time saver and result-getter. Capacity, 9,999,999.99. Let us send you one on trial. If it doesn't do all we claim, ship it back at our expense. Write for **Free Catalog.**
RAPID COMPUTER CO.
1804 Tribune Building, Chicago

COLD GALVANIZING.

AMERICAN PROCESS. NO ROYALTIES.
SAMPLES AND INFORMATION ON APPLICATION.

NICKEL
AND
Electro-Plating
Apparatus and Material
THE
Hanson & Van Winkle Co.,
Newark, N. J.
28 & 30 S. Canal St. Chicago.

RIB-LATH for HOMES

Build Stucco Houses—
artistic, fire-proof, inexpensive. **Specify Rib-Lath** for exterior walls and interior partitions, and **Hy-rib Sheathing** for light fire-proof cement roofs, wall siding and solid partitions without studs. Sample and Illustrated Booklet on request.
Reinforced Concrete as applied to any form of construction work is described in "Tru sed Concrete Illustrated"—write for copy.
Trussed Concrete Steel Co.
502 Trussed Concrete Bldg., Detroit, Mich.

AN OIL FOR EVERY PART

Mobiloil is especially prepared to meet the particular requirements of every make of automobile. It comes in various grades—a special grade for every make of engine.

VACUUM
MOBILOIL

is the only perfect automobile lubricant. Sold everywhere in barrels and cans of varying capacities. Send for Mobiloil booklet which lists every make of automobile and tells what grade of Mobiloil to use for each. It's free. Mobiloil manufactured by
VACUUM OIL CO.,
Rochester,
N. Y.

TAKE THIS PIPE

Try It-At Our Expense-

If ten days smoking does not convince you that **THE FREEMAN PIPE** affords the coolest, sweetest, best-flavored, healthiest smoke you ever enjoyed—the trial has cost you nothing. We offer you a pipe that is not a freak—merely a "clean smoke for clean people." No poisonous vapors from boiling saliva and nicotine—all saliva and nicotine caught and held by absorbent cotton in retention chamber. Smoke passes through upper channel, which never clogs. Genuine Amber bit (bent or straight, as preferred), best select French Briar, solid silver mounted, handsomely cased, $5 postpaid; No. 12, Briar, rubber bit, exactly same as other pipe except quality of material, $1 postpaid. Ask your dealer, or order from us. Money promptly returned if not entirely satisfactory. Descriptive Booklet free.

THE FREEMAN PIPE CO.,
553 DeWitt St. Kalamazoo, Mich

HELMET OIL LUBRICATES ANYTHING SEND FOR SAMPLE FREE
15-21 S. CLINTON ST.
C.H. BESLY & CO CHICAGO ILLINOIS USA